



Manuals.plus /

- › Horevo /
- › Horevo 18W Bluetooth LED Ceiling Light with Speaker User Manual

Horevo ZN-24DXH-GS-YK

Horevo 18W Bluetooth LED Ceiling Light with Speaker User Manual

Model: ZN-24DXH-GS-YK
Brand: Horevo

1. INTRODUCTION

Thank you for purchasing the Horevo 18W Bluetooth LED Ceiling Light with integrated speaker. This product combines efficient LED lighting with a Bluetooth audio system, offering dimmable brightness, adjustable color temperature, and RGB mood lighting, all controllable via a remote. This manual provides essential information for safe installation, operation, and maintenance of your new ceiling light.

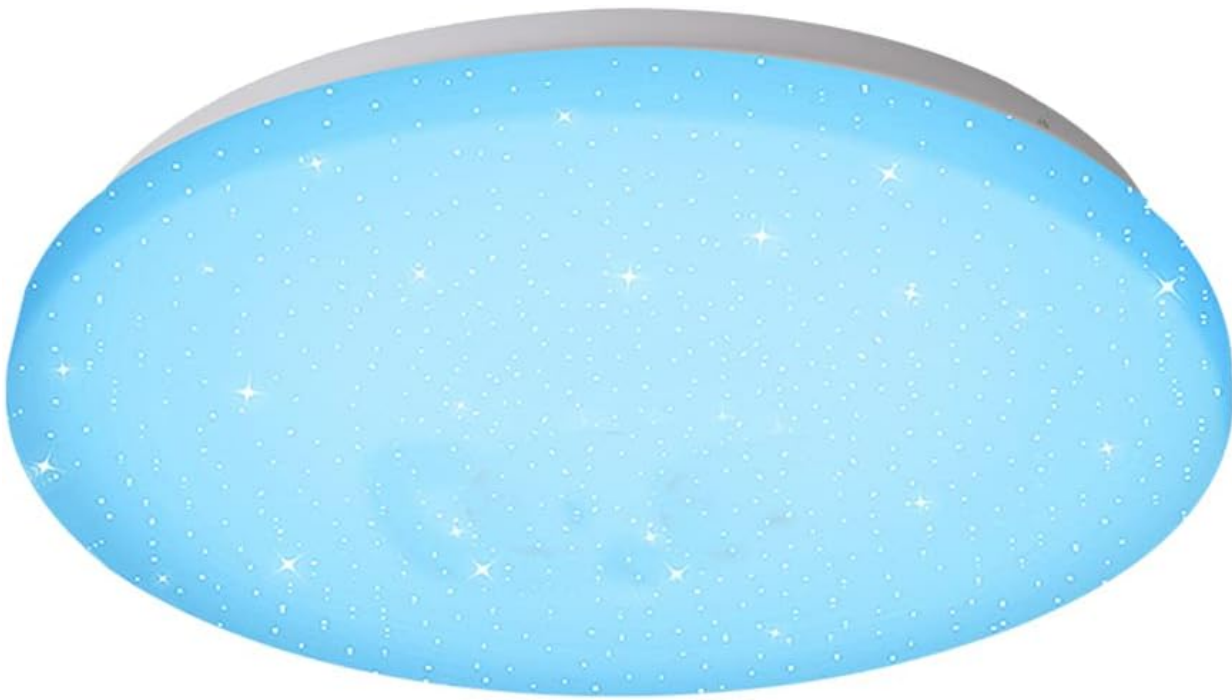


Image: The Horevo 18W Bluetooth LED Ceiling Light, showcasing its sleek, round design and integrated remote control.

2. IMPORTANT SAFETY INSTRUCTIONS

Please read all safety warnings and instructions carefully before installation and use. Failure to follow these instructions may result in electric shock, fire, or serious injury.

- **Electrical Safety:** Always disconnect power at the circuit breaker before installation, maintenance, or cleaning. Ensure the power supply matches the product's voltage (220 Volts).
- **Professional Installation:** Installation should be performed by a qualified electrician to ensure compliance with local electrical codes and safety standards.
- **Handling:** Handle the product with care. Do not drop or subject it to strong impacts.

- **Environment:** This product is rated IP44, suitable for indoor use in damp locations but not for direct water exposure. Do not install in areas with extreme temperatures or high humidity.
- **Cleaning:** Use a soft, dry cloth for cleaning. Do not use abrasive cleaners or solvents.
- **Children:** Keep the product and its components out of reach of children.

3. PACKAGE CONTENTS

Verify that all components are present and undamaged before proceeding with installation:

- Horevo 18W Bluetooth LED Ceiling Light (1 unit)
- Remote Control (1 unit)
- Mounting Hardware (screws, wall anchors)
- User Manual (this document)

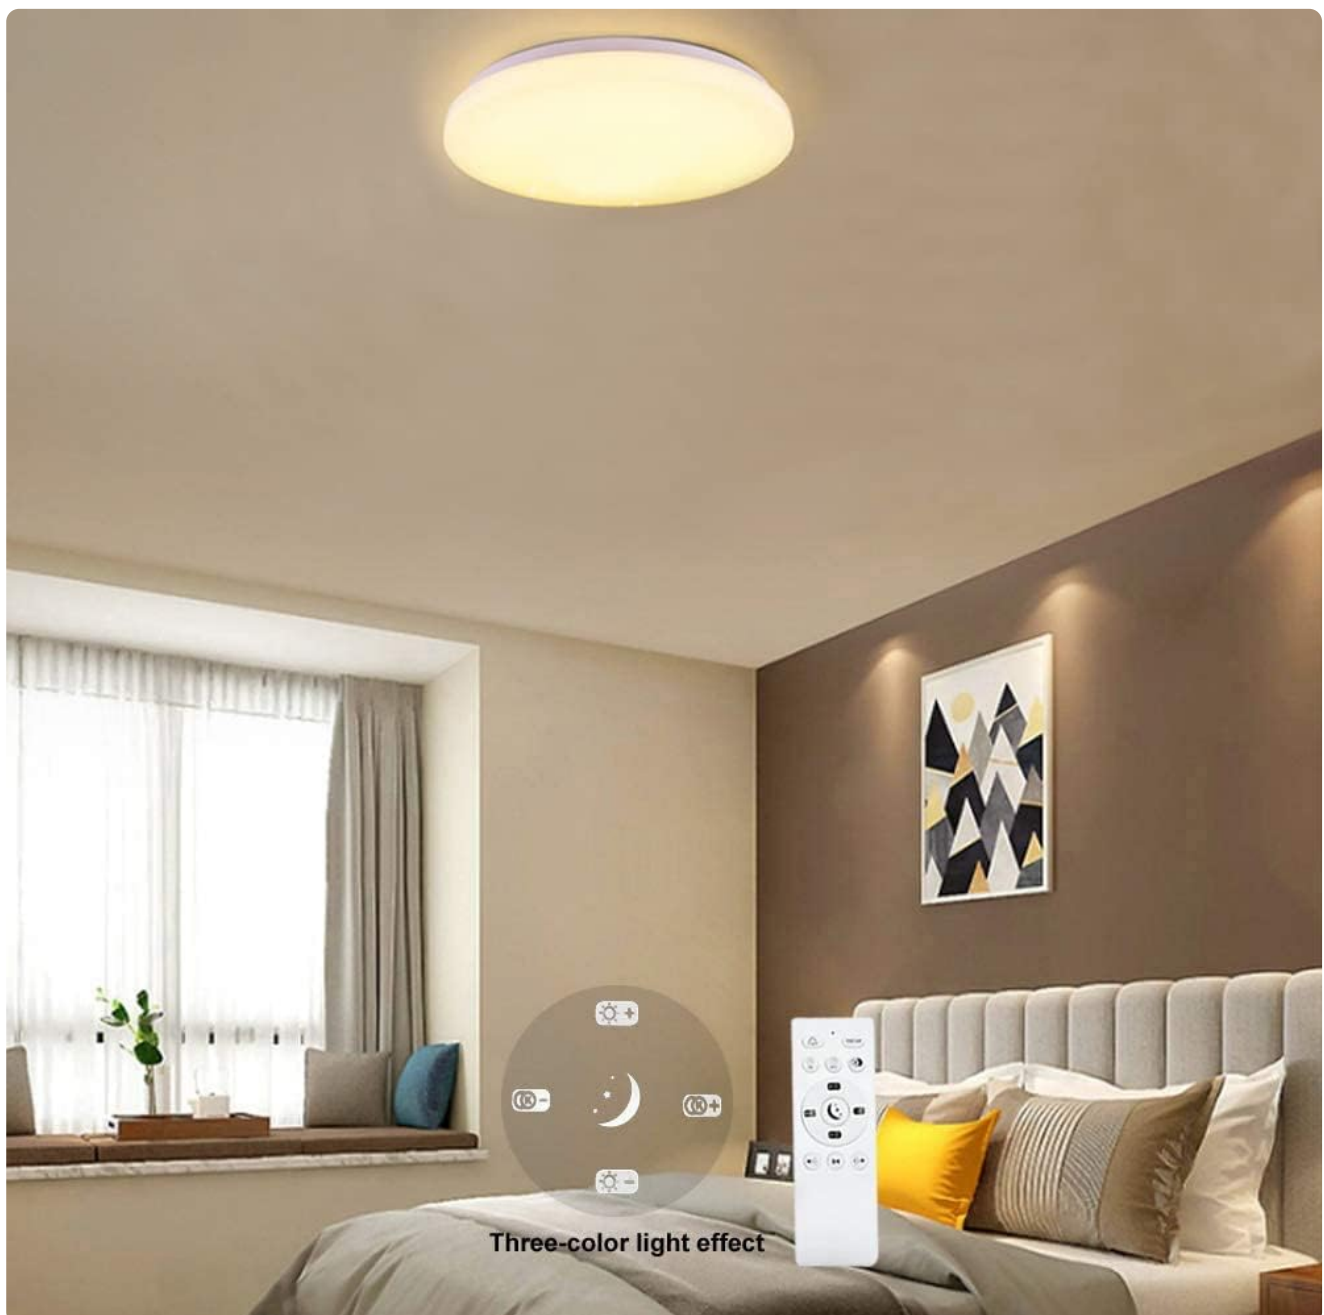


Image: The Horevo ceiling light shown with its accompanying remote control, illustrating the three-color light effect capability.

4. PRODUCT SPECIFICATIONS

Feature	Specification
Brand	Horevo
Model Number	ZN-24XDXH-GS-YK
Product Dimensions	30 x 30 x 5.5 cm (Diameter: 30 cm / 11.8 inches, Height: 5.5 cm / 2.1 inches)
Weight	1 Kilogram
Material	ABS
Color	White
Style	Modern
Light Source Type	LED
Wattage	18 Watts (Bulb included: 24 Watts)
Voltage	220 Volts
Dimmable	Yes (Brightness 10-100%, Color Temperature 3000K-6500K)
Additional Features	Bluetooth Speaker, RGB Mood Lighting
IP Rating	IP44
Power Source	Corded Electric
Switch Installation Type	Ceiling Mount
Batteries Required	No (for light unit)



Image: Diagram showing the dimensions of the Horevo ceiling light: 30cm (11.8 inches) diameter and 5.5cm (2.1 inches) height.

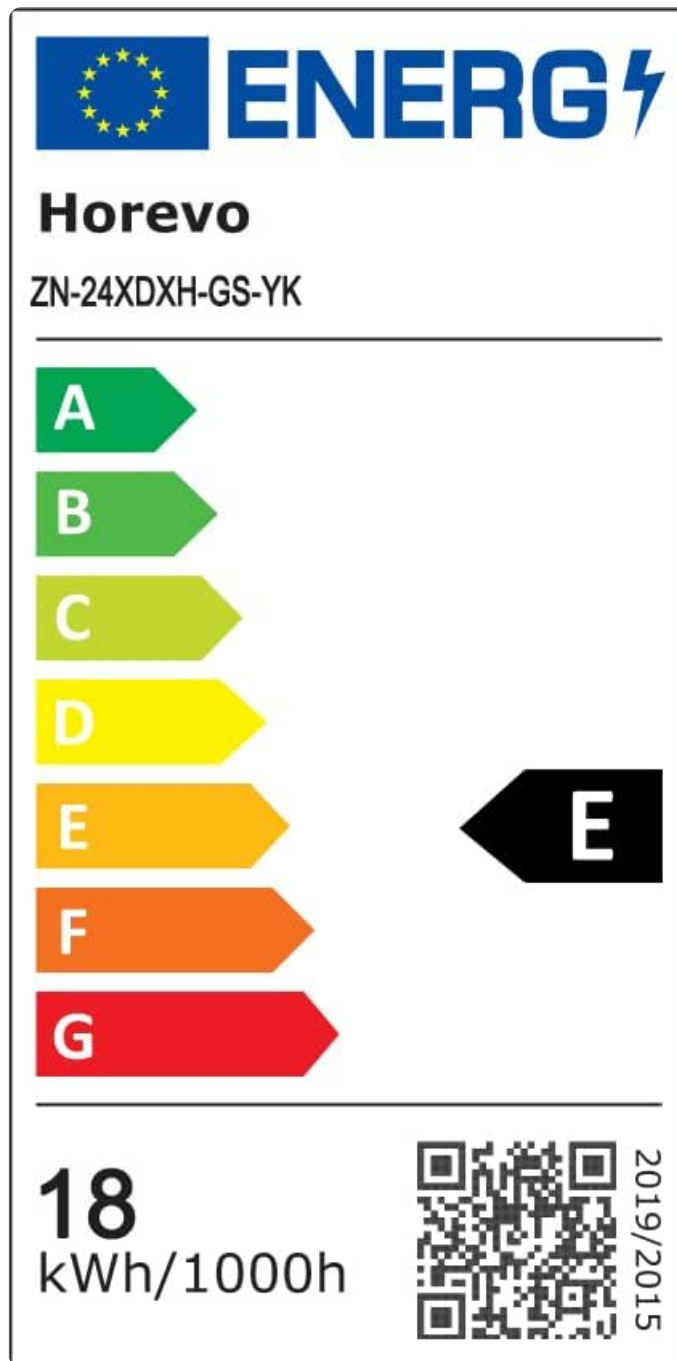


Image: EU Energy Label for the Horevo LED Ceiling Light, indicating an energy efficiency class of E and 18 kWh/1000h consumption.

For detailed product data, refer to the EPREL database: <https://eprel.ec.europa.eu/qr/1511065>

5. INSTALLATION GUIDE

Before starting, ensure you have the necessary tools: screwdriver, drill, pencil, and measuring tape. It is highly recommended to have a qualified electrician perform the installation.

1. **Power Disconnection:** Turn off the main power supply at the circuit breaker to the room where the light will be installed. Verify that the power is off using a voltage tester.
2. **Marking Drill Holes:** Hold the mounting bracket against the ceiling at the desired installation location. Use a pencil to mark the positions for the drill holes.
3. **Drilling:** Drill holes at the marked positions. Insert the appropriate wall anchors into the drilled holes.
4. **Mounting Bracket:** Secure the mounting bracket to the ceiling using the provided screws.

5. **Wiring:** Connect the household electrical wires to the corresponding terminals on the light fixture. Ensure correct polarity (Live, Neutral, Ground). Secure all connections firmly.
6. **Attaching the Light Fixture:** Carefully align the light fixture with the mounting bracket and secure it in place. Ensure it is firmly attached and stable.
7. **Power Restoration:** Once the light is securely installed, restore power at the circuit breaker.
8. **Testing:** Turn on the light switch to test the functionality of the light and remote control.



Image: The Horevo ceiling light installed in a modern living room, demonstrating its aesthetic integration.

6. OPERATING INSTRUCTIONS

Your Horevo ceiling light offers various lighting and audio functions controlled by the included remote.

6.1 Light Functions

- **On/Off:** Use the power button on the remote to turn the light on or off.
- **Brightness Adjustment (Dimming):** Use the brightness control buttons (usually '+' and '-') on the remote to adjust the light intensity from 10% to 100%.
- **Color Temperature Adjustment:** Use the color temperature buttons on the remote to switch between warm white (3000K), neutral white (4500K), and cool white (6500K).
- **RGB Mood Lighting:** Press the RGB button to activate the multi-color lighting mode. Use the dedicated color buttons or cycle mode to select different colors (e.g., red, green, blue, purple, yellow, pink).
- **Night Light Mode:** Activate the night light function for a very low brightness setting, ideal for subtle illumination.



Dimmable Color Temperature 3000-6500K



Dimmable Brightness 10-100%



Image: Visual representation of the dimmable color temperature (3000K, 4500K, 6500K) and brightness levels (10%, 30%, 60%, 100%) of the Horevo ceiling light.



RGB

Mood lighting for
Multiple Atmospheres

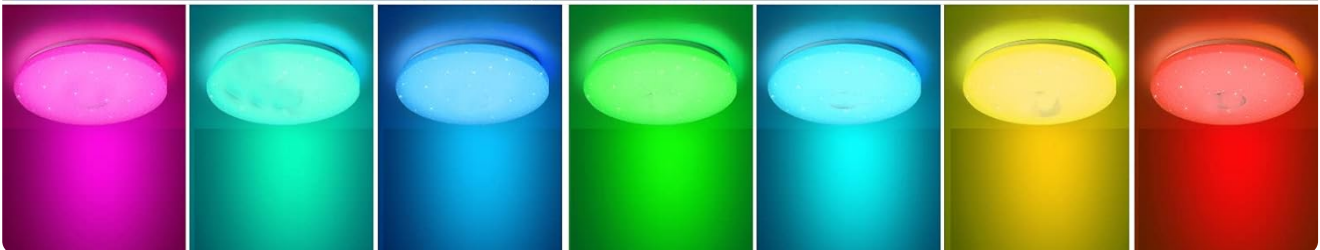


Image: The Horevo ceiling light displaying various RGB mood lighting colors, highlighting its versatility for different atmospheres.



Image: Collage showing different lighting modes including 3000K-6500K daylight, night light, RGB light, and RGB cycle light, suitable for various settings.

6.2 Bluetooth Speaker Function

- Pairing:** Turn on the light. On your smartphone or Bluetooth-enabled device, search for Bluetooth devices. Select the device named 'BT-LED' or similar (refer to the light's specific Bluetooth name if provided on packaging). Once connected, you will hear a confirmation sound.
- Audio Playback:** Play music or audio from your device. The sound will be emitted through the ceiling light's integrated speaker.
- Volume Control:** Use your connected device's volume controls to adjust the audio output. The remote control may also have volume buttons.
- Music Rhythm Mode:** Some models may feature a music rhythm mode where the light changes colors or patterns in sync with the music. Activate this via the remote if available.

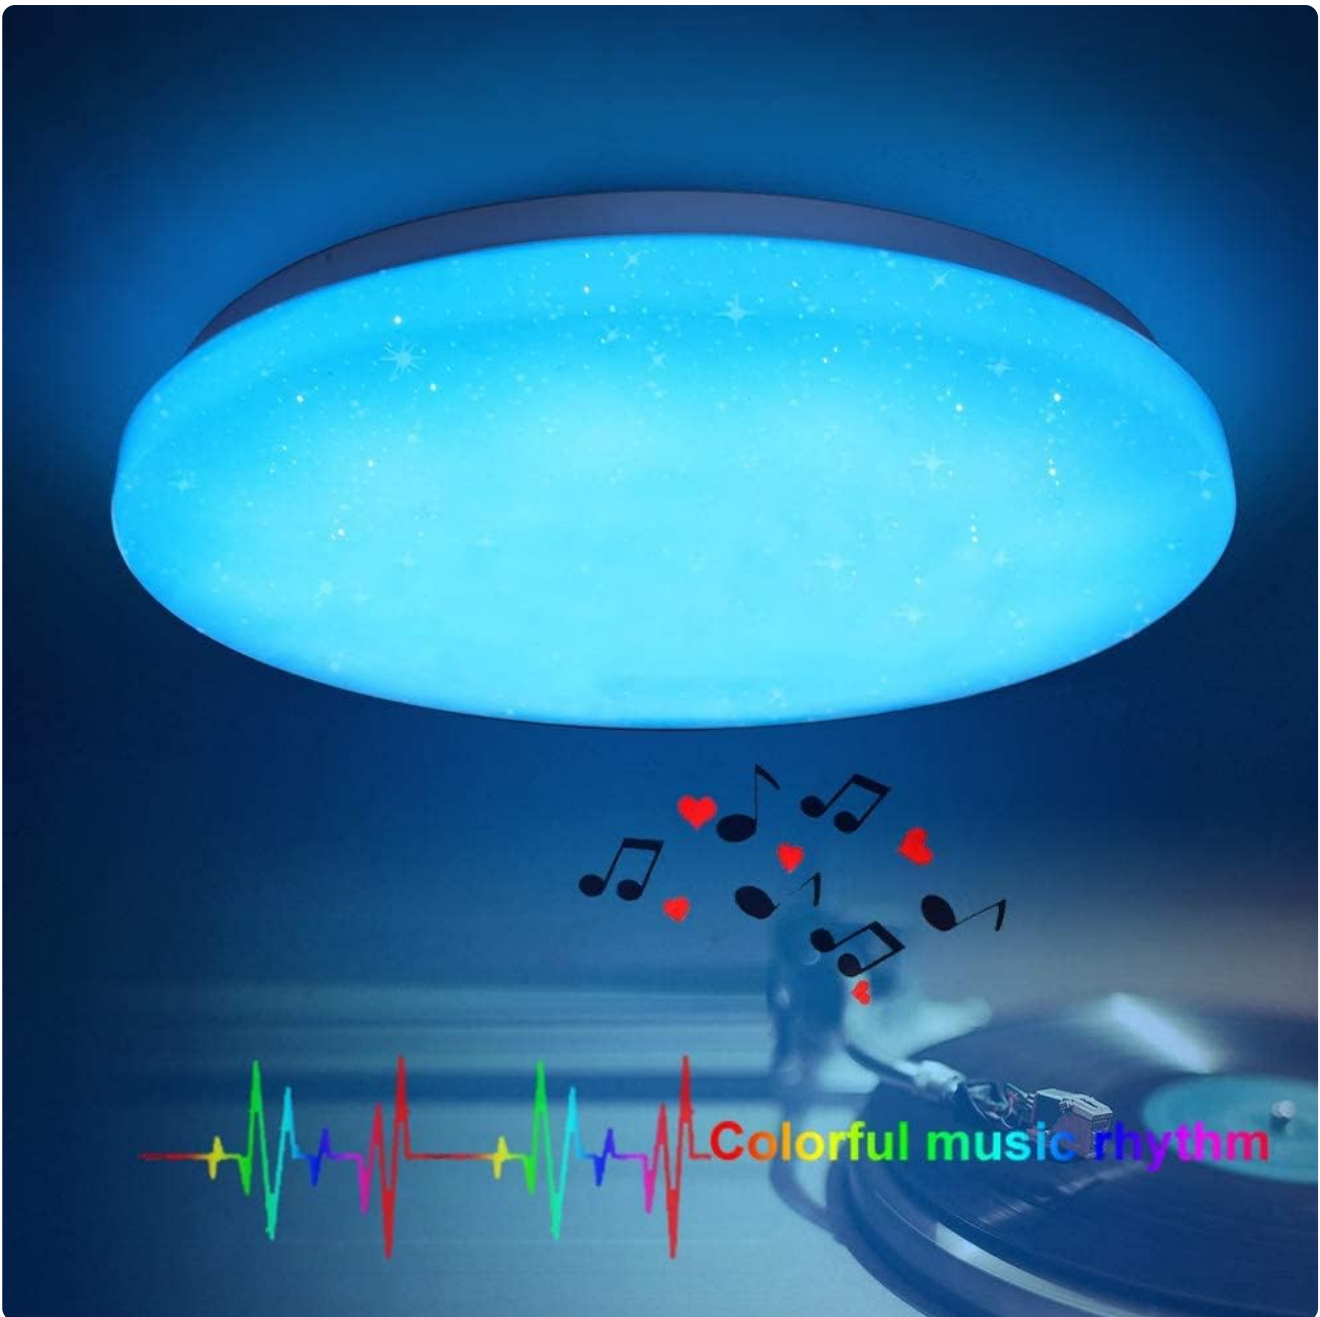


Image: The Horevo ceiling light illuminating a room with a visual representation of colorful music rhythm, indicating its integrated Bluetooth speaker functionality.



Image: The Horevo ceiling light in a child's room, playing music, highlighting its use for lighting, listening to songs, stories, and timing off functions.

7. MAINTENANCE AND CARE

Proper maintenance ensures the longevity and optimal performance of your ceiling light.

- **Cleaning:** Before cleaning, ensure the power is disconnected. Use a soft, dry, lint-free cloth to wipe the surface of the light fixture. Do not use liquid cleaners, sprays, or abrasive materials, as they may damage the finish or electrical components.
- **LEDs:** The LED light source is integrated and not user-replaceable. Do not attempt to open the fixture or replace the LEDs.
- **Remote Control:** Keep the remote control dry and clean. If the remote stops responding, check or replace its batteries (if applicable, though the product specifications state no batteries are included for the main unit, the remote typically uses small batteries like CR2032 or AAA).

8. TROUBLESHOOTING

If you encounter issues with your Horevo ceiling light, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	No power supply; loose wiring; faulty remote control.	Check circuit breaker. Ensure wiring connections are secure. Replace remote control batteries.
Light flickers or dims unexpectedly.	Unstable power supply; loose connection; incompatible dimmer switch (if not using remote).	Check power supply stability. Verify wiring. Ensure no external dimmer is used if the light is only dimmable via its remote.
Remote control not working.	Dead batteries; remote out of range; obstruction.	Replace remote batteries. Ensure remote is pointed at the light and within range. Remove any obstructions.
Bluetooth speaker not connecting.	Bluetooth not enabled on device; light not in pairing mode; device already connected to another speaker.	Ensure Bluetooth is on and visible on your device. Restart the light. Disconnect from other Bluetooth devices.
Poor sound quality from speaker.	Low volume on source device; poor Bluetooth connection; audio source issue.	Increase volume on your device. Move closer to the light for a stronger Bluetooth signal. Test with different audio sources.

9. RECYCLING AND DISPOSAL

This product contains electronic components and should not be disposed of with general household waste. Please follow local regulations for the recycling of electrical and electronic equipment.

- **Product Recycling:** For information on recycling this and other types of lamps, consult your local waste management

authority or designated collection points.

- **Broken Lamps:** If the lamp is broken or damaged, exercise caution. Avoid direct contact with broken glass or internal components. Learn more about how to clean up and dispose of broken or damaged lamps safely by consulting local guidelines or professional services.

10. WARRANTY AND SUPPORT

For warranty information, please refer to the terms and conditions provided at the time of purchase or contact your retailer. If you require technical support or have questions not covered in this manual, please contact Horevo customer service through the retailer's platform or the official Horevo website.