

ARREGUI 240160

ARREGUI Supra 240160 Electronic Safe User Manual

Model: 240160

1. INTRODUCTION

Thank you for choosing the ARREGUI Supra 240160 Electronic Safe. This manual provides essential information for the proper installation, operation, and maintenance of your safe. Please read these instructions carefully before using the product to ensure optimal security and functionality. Keep this manual for future reference.

2. SAFETY INFORMATION

- Always keep the emergency keys and your personal codes in a secure location, separate from the safe itself.
- Do not store the emergency keys inside the safe.
- Ensure the safe is installed on a stable surface or securely mounted to a wall or floor to prevent unauthorized removal.
- Replace batteries promptly when the low battery indicator appears to avoid being locked out.
- Avoid exposing the safe to extreme temperatures or humidity.

3. PACKAGE CONTENTS

Verify that all components are present in the package:

- ARREGUI Supra 240160 Electronic Safe Unit
- Instruction Manual (this document)
- 2 Emergency Opening Keys
- Fixing Material (screws for installation)

4. PRODUCT FEATURES

- **Construction:** Made of steel with a 6mm thick front and 2mm body.
- **Locking Mechanism:** Closure with two nickel-plated steel bolts, 20 mm diameter.
- **Interior Lighting:** Comfortable, energy-saving LED interior light that activates upon opening.
- **Electronic Lock:** Keypad-based electronic lock system.
- **Code Options:** Supports 2 possible opening codes: master and user. Codes can be 3 to 6 digits (1 million possible combinations).
- **Security Feature:** Temporarily blocked after entering 3 incorrect codes.
- **Digital Display:** 6-digit digital display shows help messages and low battery alerts.
- **Power Source:** Powered by 4 x AA 1.5V alkaline batteries (not included).
- **Internal Storage:** Includes a removable shelf for organized storage.

5. SETUP

5.1. Battery Installation

1. Locate the battery compartment, typically on the inside of the safe door.
2. Open the battery cover.
3. Insert 4 new AA 1.5V alkaline batteries, ensuring correct polarity (+/-).
4. Close the battery cover securely.

5.2. Initial Opening (First Use)

For the first opening, or if you forget your code, use the emergency key:

1. Locate the emergency keyhole, usually concealed behind a small cover on the keypad panel.
2. Insert one of the provided emergency keys into the keyhole.
3. Turn the key clockwise (or counter-clockwise, depending on the lock) while simultaneously turning the safe's knob to open the door.
4. Once open, you can proceed to set your personal codes.



This image depicts the ARREGUI Supra 240160 electronic safe with its door open and an emergency key inserted into the manual override lock. This illustrates the method for emergency access.

5.3. Mounting the Safe

While the safe does not require work for installation, fastening it is recommended to reduce the risk of theft. The safe is designed for secure mounting to a wall or floor.

1. Identify a suitable location for the safe, ensuring it is level and secure.
2. The Model 240160 has 4 holes at the base and 4 at the back for mounting.
3. Mark the drilling points on the wall or floor using the safe's pre-drilled holes as a template.
4. Drill holes of appropriate diameter (9 mm) and depth for the included fixing screws.
5. Position the safe and secure it using the provided fixing material. Ensure all screws are tightened firmly.

6. OPERATING INSTRUCTIONS

6.1. Setting Your User Code

The user code is the primary code for daily access.

1. With the safe door open, locate the red or green reset button on the inside of the door or near the battery compartment.
2. Press the reset button. The display will show '-----' or 'PROGRAM'.
3. Enter your desired 3 to 6 digit user code on the keypad.
4. Press the '#' or 'ENTER' button to confirm. The display will show 'GOOD' or 'SUCCESS'.
5. Test the new code with the door open before closing it.

6.2. Setting Your Master Code

The master code provides an alternative access method and can override the user code. Consult your specific model's detailed instructions for master code programming, as the procedure may vary slightly.

1. Typically, with the door open, press '0' twice, then the reset button.
2. Enter your desired 3 to 6 digit master code.
3. Press '#' or 'ENTER' to confirm.
4. Test the master code with the door open.

6.3. Opening the Safe



The ARREGUI Supra 240160 electronic safe is shown with its door securely closed. The electronic keypad and digital display are prominent on the front panel, ready for code entry.

1. Enter your 3 to 6 digit user or master code on the keypad.
2. The display will show 'OPEN' or 'GOOD'.
3. Within a few seconds, turn the knob clockwise (or counter-clockwise) to open the door.

6.4. Closing the Safe



This image displays the ARREGUI Supra 240160 electronic safe with its door open. The electronic keypad is visible on the door, along with the turning knob. The interior shows a light-colored shelf and a dark felt lining on the bottom.

1. Close the safe door firmly.
2. Turn the knob counter-clockwise (or clockwise) until the door is securely locked. The bolts will engage.

6.5. Digital Display Messages

- **'GOOD' / 'OPEN':** Code accepted, safe can be opened.
- **'ERROR' / 'E-CODE':** Incorrect code entered.

- **'HOLD' / 'LOCK':** Safe is temporarily blocked after multiple incorrect entries. Wait for the lockout period to expire.
- **'LOW BATT':** Batteries are low and need replacement.
- **'PROGRAM':** Ready to accept a new code.

7. EMERGENCY OPENING

7.1. Using the Emergency Key

The emergency key provides access in situations such as forgotten codes, low batteries, or electronic keypad failure. Refer to section 5.2 for detailed steps.

7.2. External Power Supply

In case of completely discharged batteries, you can use an external 9V battery to power the safe temporarily.

1. Locate the external power plug, usually a small port on the keypad panel.
2. Connect a 9V battery to this port, ensuring correct polarity.
3. While holding the 9V battery in place, enter your code on the keypad.
4. Turn the knob to open the safe.
5. Once open, replace the internal AA batteries immediately.

8. MAINTENANCE

- **Battery Replacement:** Replace the 4 AA batteries when the 'LOW BATT' indicator appears. Use only new alkaline batteries.
- **Cleaning:** Clean the exterior of the safe with a soft, damp cloth. Avoid abrasive cleaners or solvents.
- **Code Testing:** Periodically test your codes with the door open to ensure they are correctly programmed and remembered.
- **Key Storage:** Ensure emergency keys are stored safely and separately from the safe.

9. TROUBLESHOOTING

- **Safe will not open with code:**
 - Ensure batteries are fresh and correctly installed.
 - Verify the code entered is correct.
 - If 'HOLD' or 'LOCK' is displayed, wait for the temporary lockout period to expire.
 - Use the emergency key or external 9V battery for access.
- **Display is blank or dim:**
 - Replace the batteries.
 - Check battery polarity.
- **Emergency key does not work:**
 - Ensure the key is fully inserted and turned correctly while operating the knob.
 - If the key is damaged, contact customer support.

10. SPECIFICATIONS



This image provides a view inside the ARREGUI Supra 240160 safe. The door is open, revealing the bright green interior and a removable shelf. The two locking bolts are visible on the edge of the door.

Brand	ARREGUI
Model Number	240160
Product Dimensions	13.78"D x 14.17"W x 14.96"H (38x35x36 cm)
Capacity	41 Liters (approx. 17.5 Liters based on some specifications)
Material	Alloy Steel
Lock Type	Electronic, Key
Color	Black
Item Weight	16.22 Kilograms (approx. 35.7 pounds)
Mounting Type	Wall Mount / Floor Mount
Batteries Required	4 x AA 1.5V Alkaline (not included)




This image shows the interior of the ARREGUI Supra 240160 safe with several items, including a camera, watch, and small boxes, placed on the shelf and bottom. This illustrates the practical storage capacity of the safe.

11. WARRANTY AND SUPPORT

For warranty information and customer support, please refer to the documentation provided at the time of purchase or visit the official ARREGUI website. Keep your purchase receipt as proof of purchase for any warranty claims.

Related Documents - 240160

SUPRA ES/ Electrónica + pomo IT/ Elettronica + manopola PT/ Electrónica + punção RU/ Electronic + knob RU/ Electronique + poignée EL/ Ηλεκτρονική + γρίλι EL/ Ηλεκτρονική + Τυμpanάκι  ARREGUI	Arregui SUPRA Electronic Safe: User Manual and Warranty Information Comprehensive guide for the Arregui SUPRA electronic safe, covering installation, programming of opening codes, operation, security features, maintenance, and warranty details. Includes instructions in multiple languages.
SUPRA ES/ Caja fuerte electrónica con base IT/ Cassaforte elettronica con base PT/ Caixa eletrônica com base RU/ Electronic Safe with base RU/ Coffre-fort électronique avec c/b EL/ Ηλεκτρονικό γκαρνταίο με βάση  ARREGUI	Arregui SUPRA Electronic Safe User Manual and Guarantee Comprehensive user manual and guarantee certificate for the Arregui SUPRA electronic safe, covering installation, operation, programming, maintenance, and warranty information.
PLUS C ES/ Electrónica + base IT/ Elettronica + cinescopio PT/ Caixa eletrônica com visor RU/ Electronic + key RU/ Electronique + clé EL/ Ηλεκτρονική + κλειδί  CE  ARREGUI	ARREGUI PLUS C Electronic Safe: User Manual and Installation Guide Comprehensive guide for the ARREGUI PLUS C electronic safe, covering operation, installation (flush-mount and surface-mount), maintenance, and warranty. Learn how to open, close, change codes, and secure your valuables with ARREGUI's reliable safe technology.
CLASS ES/ Electrónica + pomo IT/ Elettronica + manopola PT/ Electrónica + punção RU/ Electronic + knob RU/ Electronique + poignée EL/ Ηλεκτρονική + γρίλι EL/ Ηλεκτρονική + Τυμpanάκι  ARREGUI	ARREGUI Class Electronic Safe: User Manual and Security Guide Comprehensive user manual for the ARREGUI Class electronic safe, covering operation, installation, battery replacement, programming codes, manual override, and warranty information.
FORMA EVOLUTION ES/ Caja fuerte electrónica con base IT/ Cassaforte elettronica con base PT/ Caixa eletrônica com base RU/ Electronic Safe with base RU/ Coffre-fort électronique avec c/b EL/ Ηλεκτρονικό γκαρνταίο με βάση  ARREGUI	ARREGUI FORMA EVOLUTION Electronic Safe User Manual Comprehensive instructions for operating and maintaining the ARREGUI FORMA EVOLUTION electronic safe, covering initial setup, opening/closing, code management, troubleshooting, and warranty information.

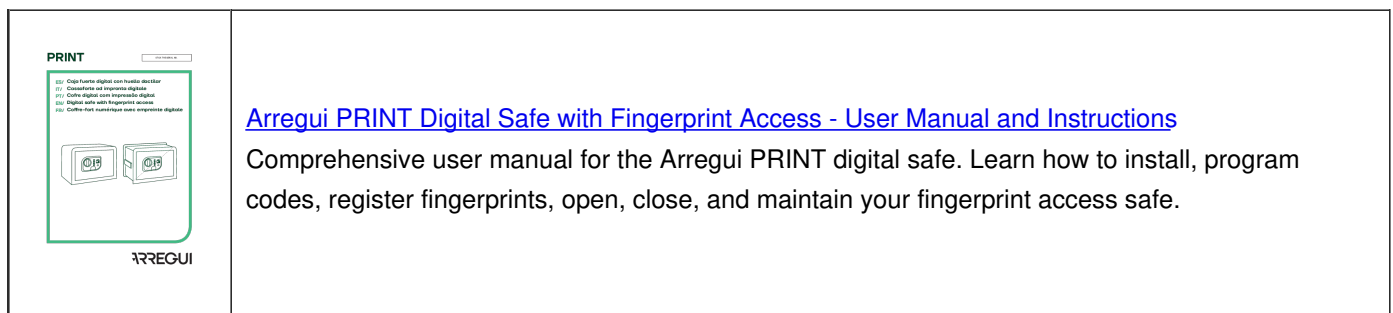

[Arregui PRINT Digital Safe with Fingerprint Access - User Manual and Instructions](#)

Comprehensive user manual for the Arregui PRINT digital safe. Learn how to install, program codes, register fingerprints, open, close, and maintain your fingerprint access safe.

Documents - ARREGUI – 240160



[\[pdf\]](#) Catalog

Casseforti e Sicurezza ARREGUI CASSEFORTI SICUREZZA 2021 arregui.it 2022 01 |||

Catalogo Generale 2021 Casseforti e Sicurezza Catalogo generale 2021 arregui.it
arregui.it Catal ... gio Fori di fissaggio: Rif. 240110/: 2 alla base e 2 alla base
posteriore, di 9 mm Rif. 240120/ **240160**: 4 alla base e 4 alla base posteriore, di 9 mm
SISTEMA DI CHIUSURA Elettronica manopola ...

lang:it score:22 filesize: 7.94 M page_count: 64 document date: 2021-06-29




[\[pdf\]](#) Specifications

SAFES 2017 18 Arregui May 7 2018 — OPENING ELECTRONIC WITH KNOB Reference 16501 S0 S1
S2 Exterior measurements HxWxD BASA FOR WARDROBE BASES TECHNICAL SPECIFICATION Anti
drill protection Emergency key Screen Opening codes Ref 20000 S7 6 digits 2 ARREGUI DOMUS arregui
es 05 3 biz INDEX HOTEL STYLO Pag 30 NEW TRAVEL 31 GUN BRACO 32 GOLDEN 34 WOOD 36
POINTER 37 CPP01 SUPRA 28 FIREPROOF LOGICA 10 24 IDEAL 25 WALL PLUS C ELECTR with
Knob 26 |||

SAFES 2017_18 SAFES www.arregui.biz INDEX www.arregui.biz SAFES BASA /
DRAWER Pag. 4 GRID Pag ... x200 mm. 195x305x140 mm. 7,5 kg. 8 L. 6 mm. / 2
mm. x 2/20 mm. * 733349 270x370x270 mm. SUPRA Ref. **240160** ELECTRONIC
WITH KNOB 240120 250x350x250 mm. 245x345x190 mm. 10,5 kg. 16 L. 6 mm. / 2
mm. x 2...

lang:en score:20 filesize: 3.14 M page_count: 37 document date: 2018-01-11

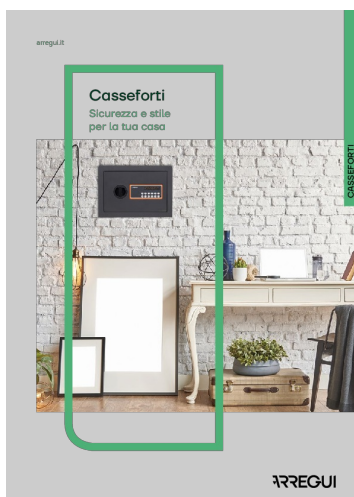

[\[pdf\]](#) Catalog

Sicurezza e stile per la tua casa arregui es Catalogo generale 2020 it 13 Casseforti a mobile c i o a n t r p
n 10 3 mm s P E S O R F N T A L CARATTERISTICHE FISICHE Spessore frontale corpo 5 ARREGI
CAJAS FUERTES IT SIN PVP 08 |||

arregui.it Casseforti Sicurezza e stile per la tua casa CASSEFORTI Casseforti a
mobile CCaattaaal ... gio Fori di fissaggio: Rif. 240110/: 2 alla base e 2 alla base
posteriore, di 9 mm Rif. 240120/ **240160**: 4 alla base e 4 alla base posteriore, di 9 mm
SISTEMA DI CHIUSURA Elettronica manopola ...

lang:it score:19 filesize: 3.12 M page_count: 38 document date: 2020-07-03




[pdf]

COFFRES FORTS Arregui Coffres forts May 31 2018 — OUVERTURE ÉLECTRONIQUE MOTORISÉE À CLÉ Référence 20000 S7 S7K Dimension extérieure H x L P 110x310x380 mm BASA POUR LA BASE DES ARMOIRES FICHE TECHNIQUE Protection anti perçage Clé de secours Affichage Code d ouverture Réf 6 chiffres 2 2017 18 arregui es 05 |||

COFFRES-FORTS 2017_18 COFFRES-FORTS www.arregui.biz INDEX
www.arregui.biz COFFRES-FORTS BASA / ... mm. 7,5 kg. 8 L. 6 mm. / 2 mm. x 2/20 mm. * 733349 270x370x270 mm. COFFRES-FORTS POSER SUPRA Rf. **240160** ELECTRONIQUE POIGNE 240120 250x350x250 mm. 245x345x190 mm. 10,5 kg. 16 L. 6 mm. / 2 mm. x 2...

lang:fr **score:19** filesize: 32.86 M page_count: 38 document date: 2018-05-03

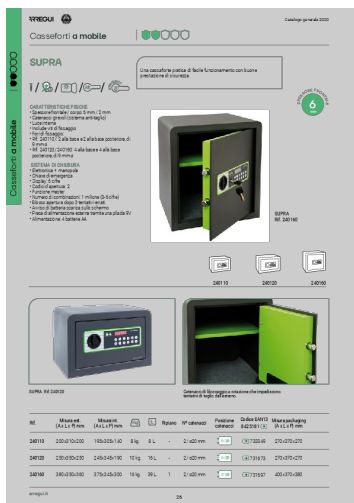

[pdf] Catalog

Descargar Istruzioni cassaforte SUPRA pomo Arregui arregui es 354 cajas fuertes 46012 istruzioni supra |||

Casseforti a mobile eme SPES Casseforti a mobile Catalogo generale 2020 NTALE y SUPRA / / / / ... gio Fori di fissaggio: Rif. 240110/: 2 alla base e 2 alla base posteriore, di 9 mm Rif. 240120/ **240160**: 4 alla base e 4 alla base posteriore, di 9 mm SISTEMA DI CHIUSURA Elettronica manopola ...

lang:it **score:18** filesize: 145.79 K page_count: 1 document date: 2020-07-06




[pdf] Catalog

GENERALE 2017 18proxarregui it 2018 05 cat generale arregui domus |||

2017_18 CATALOGO GENERALE CASSEFORTI SICUREZZA RACCOLTA DIFFERENZIATA E ORDINE www.arregui.it SCOP ... mm. 7,5 kg. 8 L. 6 mm. / 2 mm. x 2/20 mm. * 733349 270x370x270 mm. CASSEFORTI A MOBILE SUPRA Ref. **240160** ELETTRONICA MANOPOLA 240120 250x350x250 mm. 245x345x190 mm. 10,5 kg. 16 L. 6 mm. / 2 mm. x...

lang:it **score:17** filesize: 10.32 M page_count: 102 document date: 2017-06-23

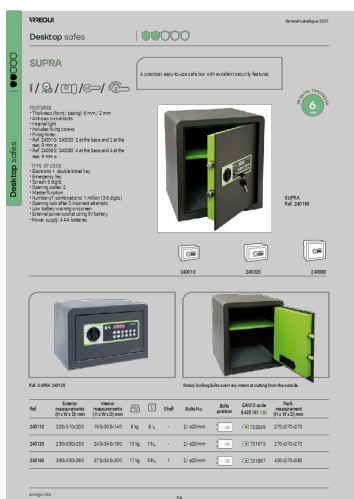

[pdf] Datasheet Catalog

ARREGI CAJAS FUERTES 2021 EN 4 Descargar Supra with key Data Sheet Arregui arregui es 547

2017 2018 70976 supra data sheet |||

Desktop safes eme FRON NESS y Desktop safes General catalogue 2021 SUPRA / / / / rgenc 1 FEA ... ies A practical, easy-to-use safe box with excellent security features. TAL THICK 6 mm SUPRA Ref. **240160** 240010 240020 240080 Ref. SUPRA 240120 Rotary locking bolts avert any intent at cutting ...

lang:en **score:17** filesize: 100.27 K page_count: 1 document date: 2021-05-21

[\[pdf\]](#) Catalog

Punto Di Vendita MURATA DIETRO PRESE DI CORRENTE SCHEDA TECNICA Finitura Nero

Installazione La cassaforte deve essere installata di modo che la placca delle prese corrente sia in linea con parete cat generale arregui domus 2017 es 2018 05 |||

2017_18 CATALOGO GENERALE CASSEFORTI SICUREZZA RACCOLTA DIFFERENZIATA E ORDINE www.arregui.it SCOP ... mm. 7,5 kg. 8 L. 6 mm. / 2 mm. x 2/20 mm. * 733349 270x370x270 mm. CASSEFORTI A MOBILE SUPRA Ref.

240160 ELETTRONICA MANOPOLA 240120 250x350x250 mm. 245x345x190 mm. 10,5 kg. 16 L. 6 mm. / 2 mm. x...

lang:it score:15 filesize: 10.31 M page_count: 102 document date: 2017-06-23



[\[pdf\]](#) Accessories

CASSEFORTI 2017 18 mm LE DISPONIBILE A PARTIRE DA SETTEMBRE SCHEDA TECNICA Tipo di serratura 6 gorges asimmetriche con chiave a doppia mappa Materiale Acciaio finitura in legno Codice EAN13 cat casseforti a5 arregui es 2018 05 |||

CASSEFORTI 2017_18 CASSEFORTI www.arregui.it CASSEFORTI GAMMA BRACO Pag. 4 GOLDEN Pag. 6 WOOD ... mm. 7,5 kg. 8 L. 6 mm. / 2 mm. x 2/20 mm. * 733349 270x370x270 mm. CASSEFORTI A MOBILE SUPRA Ref. **240160** ELETTRONICA MANOPOLA 240120 250x350x250 mm. 245x345x190 mm. 10,5 kg. 16 L. 6 mm. / 2 mm. x...

lang:it score:10 filesize: 18.45 M page_count: 36 document date: 2017-06-22

