

- Manuals.plus /
- > BRANO /
 - > BRANO ZM-ZMRH-T05 36-inch Under Cabinet Range Hood Instruction Manual

BRANO ZM-ZMRH-T05

BRANO ZM-ZMRH-T05 36-inch Under Cabinet Range Hood
Instruction Manual

Model: ZM-ZMRH-T05 (36-inch variant)

1. PRODUCT OVERVIEW

The BRANO ZM-ZMRH-T05 36-inch under cabinet range hood is designed to enhance your kitchen environment by effectively removing cooking fumes, grease, and odors. It features an advanced slant vent design, multiple control options, and powerful suction capabilities.



Image 1: BRANO ZM-ZMRH-T05 36-inch Under Cabinet Range Hood with its auto-open baffle design.

2. SAFETY INFORMATION

- Read all instructions carefully before installation and operation.
- Ensure the power supply is disconnected before performing any maintenance or cleaning.
- This appliance is intended for household use only.
- Maintain proper clearance between the range hood and cooking surface as specified in local building codes.
- Regularly clean grease filters to prevent grease buildup and potential fire hazards.

3. WHAT'S IN THE BOX

The following components are included with your BRANO ZM-ZMRH-T05 range hood:

- Range hood (1 unit)
- 36" Baffle Filters (3 units)
- Charcoal Filter (1 unit)
- Duct Adapter (1 unit)
- 6" Transition (1 unit)
- Screws and User manual (1 set)

4. SETUP AND INSTALLATION

The BRANO ZM-ZMRH-T05 range hood is designed for under cabinet mounting and can be configured for both ducted and ductless ventilation. Refer to the detailed installation guide for specific steps.

4.1 Installation Video Guide

Video 1: Official BRANO Under Cabinet Range Hood Installation Guide. This video provides a visual walkthrough of the installation process.

4.2 Ducted/Ductless Conversion

The range hood supports both ducted and ductless configurations. For ducted operation, connect the included duct adapter and 6-inch transition to an external ventilation system. For ductless (recirculating) operation, ensure the charcoal filter is installed to purify the air before recirculating it back into the kitchen.



Image 2: Illustration of the ducted and ductless convertible options, showing the carbon filter for recirculation.

5. OPERATING INSTRUCTIONS

The BRANO range hood offers multiple intuitive control methods for convenience.

5.1 Voice Control

Activate voice commands by saying "Hi Andy." You can then issue commands such as "Power on," "Speed Two," or "Light on."



Image 3: Demonstrating the voice control feature of the range hood.

5.2 Gesture Control

Control fan speed without touching the panel. Wave your hand across the two sensing points to adjust the fan speed up or down.

Gesture Sensing Control



Image 4: Illustrating the gesture sensing control for fan speed adjustment.

5.3 Touch Control Panel

The high-sensitivity touch control panel allows for direct operation of all functions, including power, fan speed (4 speeds), lighting, and delay shutdown.

5.4 Fan Speeds and Suction Power

The range hood features a 4-speed exhaust fan with up to 900 CFM (Cubic Feet Per Minute) suction power to effectively remove cooking odors and smoke.

Powerful Suction

Provide maximum 900CFM suction



Image 5: The range hood's powerful suction in action, removing cooking fumes.

5.5 Dimmable LED Lights

Illuminate your cooking area with the integrated dimmable LED lights. Adjust brightness by long-pressing the light button on the touch control panel.

Permanent Baffle Filters

Dishwasher-safe stainless steel filters are durable and easy to clean



Image 6: Dimmable LED lights providing illumination over the cooking surface.

5.6 3-Minute Delayed Shut-off

Utilize the 3-minute delayed shut-off function to ensure all residual grease and smoke are effectively removed after cooking, leaving your kitchen air fresh.

Dimmable LED Lights

The light brightness can be adjusted by long pressing the light button



Image 7: Visual representation of the delayed shut-off feature.

5.7 Low Noise Operation

The range hood operates at a low noise level, not exceeding 65 dB even at its highest speed, ensuring a quiet kitchen environment.

Low Noise Level

The noise of the range hood does not exceed 65dB at the highest speed



Image 8: Noise level comparison chart for the range hood.

5.8 Product Features Overview Video

Video 2: Overview of the BRANO under cabinet range hood features, including voice and gesture controls.

6. MAINTENANCE

6.1 Cleaning Baffle Filters

The BRANO kitchen hood includes 3 permanent stainless steel baffle filters. These filters are high-temperature resistant, effective against grease, and easy to assemble/disassemble. They are dishwasher-safe for convenient cleaning.

Ultra Slim Design

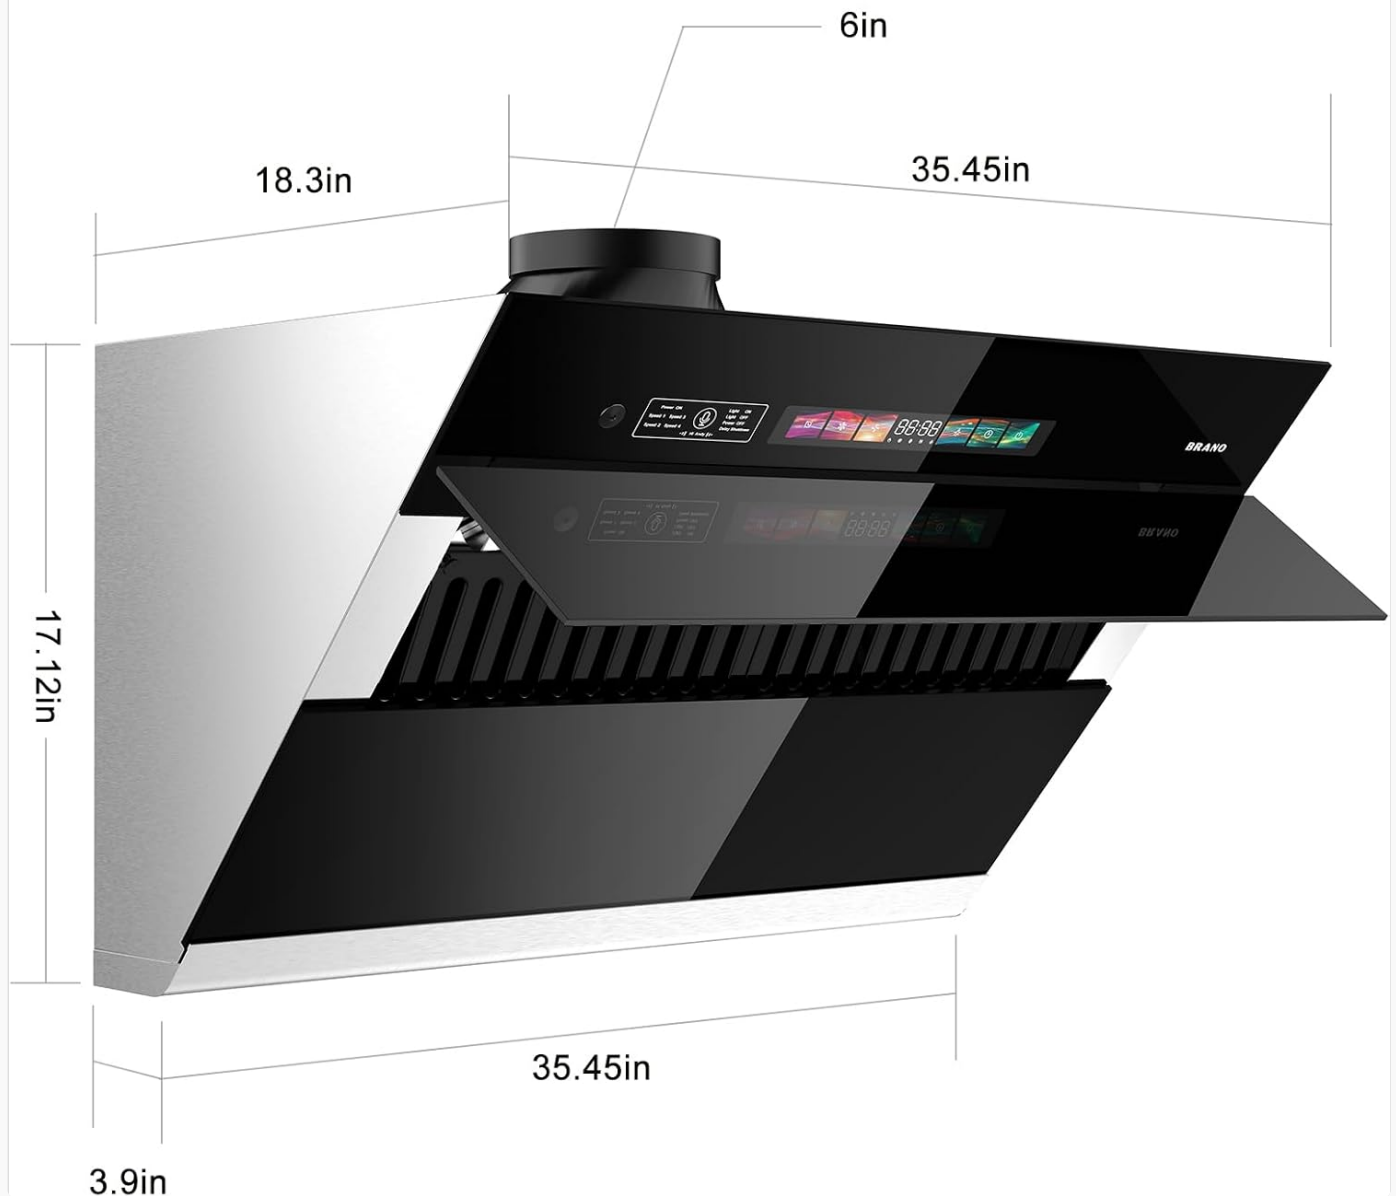


Image 9: Dishwasher-safe baffle filters for easy cleaning.

6.2 General Cleaning

Wipe the exterior surfaces of the range hood with a soft cloth and mild detergent. Avoid abrasive cleaners or scouring pads that could damage the tempered glass or stainless steel finish.

7. TROUBLESHOOTING

If you encounter issues with your BRANO range hood, refer to the following common troubleshooting tips:

- **No Power:** Check if the power cord is securely plugged into a working outlet. Verify the circuit breaker has not tripped.
- **Fan Not Working:** Ensure the fan is turned on via touch, gesture, or voice control. Check for any obstructions in the fan blades.
- **Poor Suction:** Clean the baffle filters. Ensure the ductwork is not obstructed or kinked (for ducted models). For ductless models, check if the charcoal filter needs replacement.
- **Lights Not Working:** Check if the lights are turned on. If individual lights are out, they may need replacement.

(consult customer support).

- **Voice/Gesture Control Unresponsive:** Ensure the sensors are clean and unobstructed. Try resetting the unit by turning off and on the power.

For persistent issues, please contact BRANO customer support.

8. SPECIFICATIONS

Feature	Specification
Model Info	ZM-ZMRH-T05
Product Dimensions	17"D x 29.5"W x 18.2"H
Item Weight	52.2 pounds
Air Flow Capacity	900 Cubic Feet Per Minute (CFM)
Noise Level	65 Decibels (Max)
Number of Speeds	4
Controls Type	Voice, Gesture, Touch
Mounting Type	Under Cabinet Mount
Ventilation Type	Ducted/Ductless Convertible
Filter Type	Stainless Steel Baffle Filters
Light Source Type	LED
Wattage	230 watts
Voltage	110 Volts (AC)
Material	Tempered Glass
Special Features	3 mins shutdown delay, voice/gesture/touch control

9. WARRANTY AND SUPPORT

Your BRANO range hood is backed by a 5-year service warranty. For any assistance, questions, or to report issues, please contact BRANO customer support. Our dedicated team is committed to ensuring your satisfaction and years of trouble-free performance.

Contact information for support can typically be found on the BRANO official website or within the product packaging.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question

and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0CZRDSYXH>

More documents and user manuals: **<https://manuals.plus/>**