Findepot B0CZRZ8LTN

Findepot Frameless Sliding Shower Door

Model: B0CZRZ8LTN - Brushed Nickel, 56-60 in W x 75 in H

Introduction

This manual provides detailed instructions for the installation, operation, maintenance, and troubleshooting of your new Findepot Frameless Sliding Shower Door. Please read this manual thoroughly before beginning installation to ensure proper setup and safe use. Retain this manual for future reference.

Safety Information

WARNING: Improper installation or use can lead to serious injury or product damage. Always follow all instructions and local building codes.

- Always wear safety glasses during installation.
- Handle glass panels with extreme care. Tempered glass, while strong, can shatter if struck at the edges or corners.
- Ensure the installation surface (walls, floor) is structurally sound and capable of supporting the weight of the shower door.
- Use appropriate tools and hardware for your specific wall type.
- Do not overtighten screws, as this can crack glass or strip threads.
- Keep children and pets away from the installation area.
- If you are unsure about any part of the installation, consult a qualified professional.

Product Overview

The Findepot Frameless Sliding Shower Door is designed for modern bathrooms, offering both functionality and aesthetic appeal. Key features include:

- **Adjustable Width:** Designed to fit openings from 56 to 60 inches wide.
- **Tempered Glass:** 5/16" (8mm) clear ANSI-certified tempered glass for enhanced safety and durability.
- **Soft-Close Design:** Ensures quiet and smooth operation, preventing slamming.

- **Reversible Installation:** Can be configured for left or right-side opening.
- **Durable Hardware:** Constructed with stainless steel components in a brushed nickel finish.
- **Waterproof Design:** Features bottom and side seal strips to prevent leaks.



Figure 1: Frameless Design with Super Sturdy Top Rail and Adjustable Width.

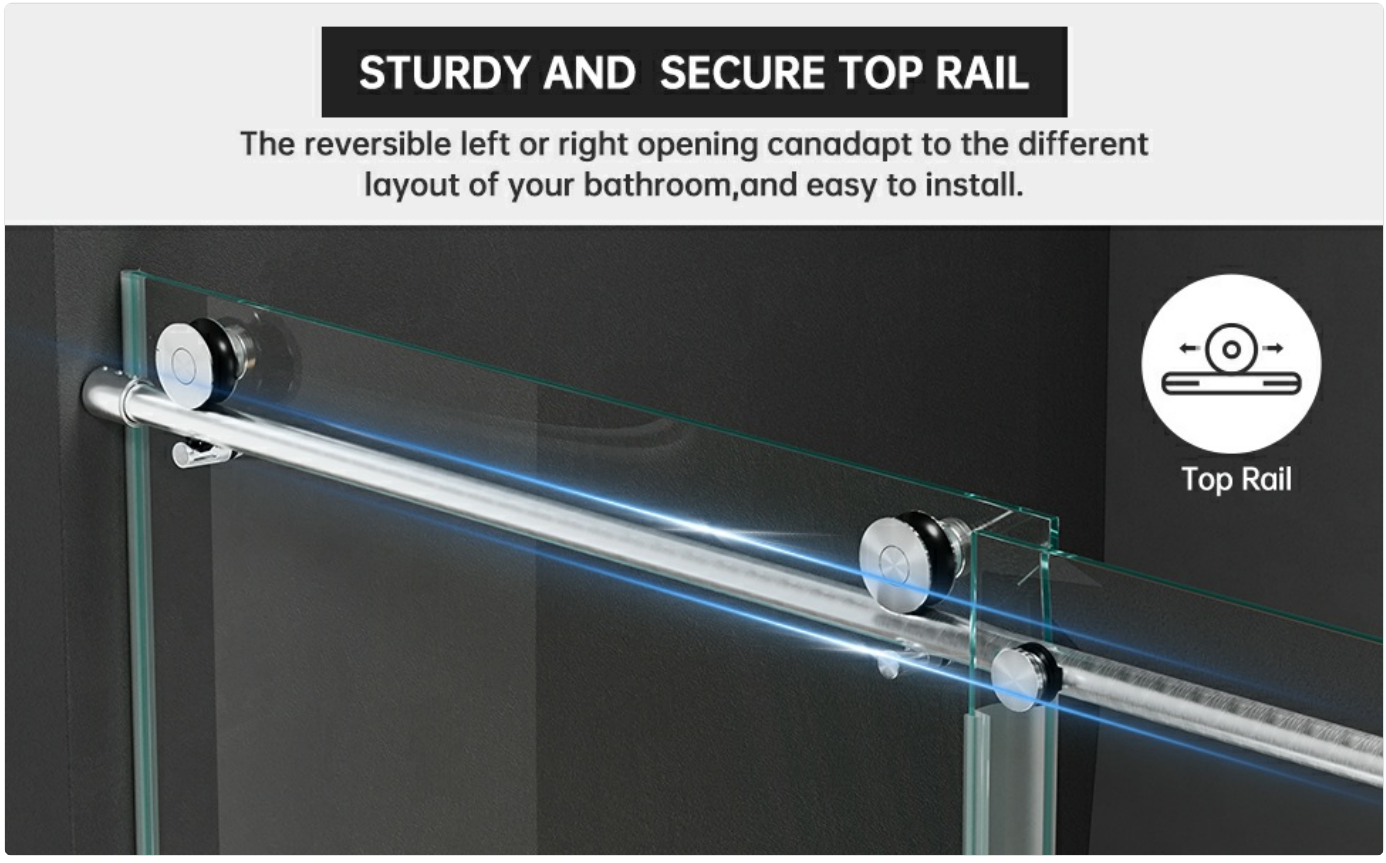


Figure 2: Soft-Close Design for noiseless operation.

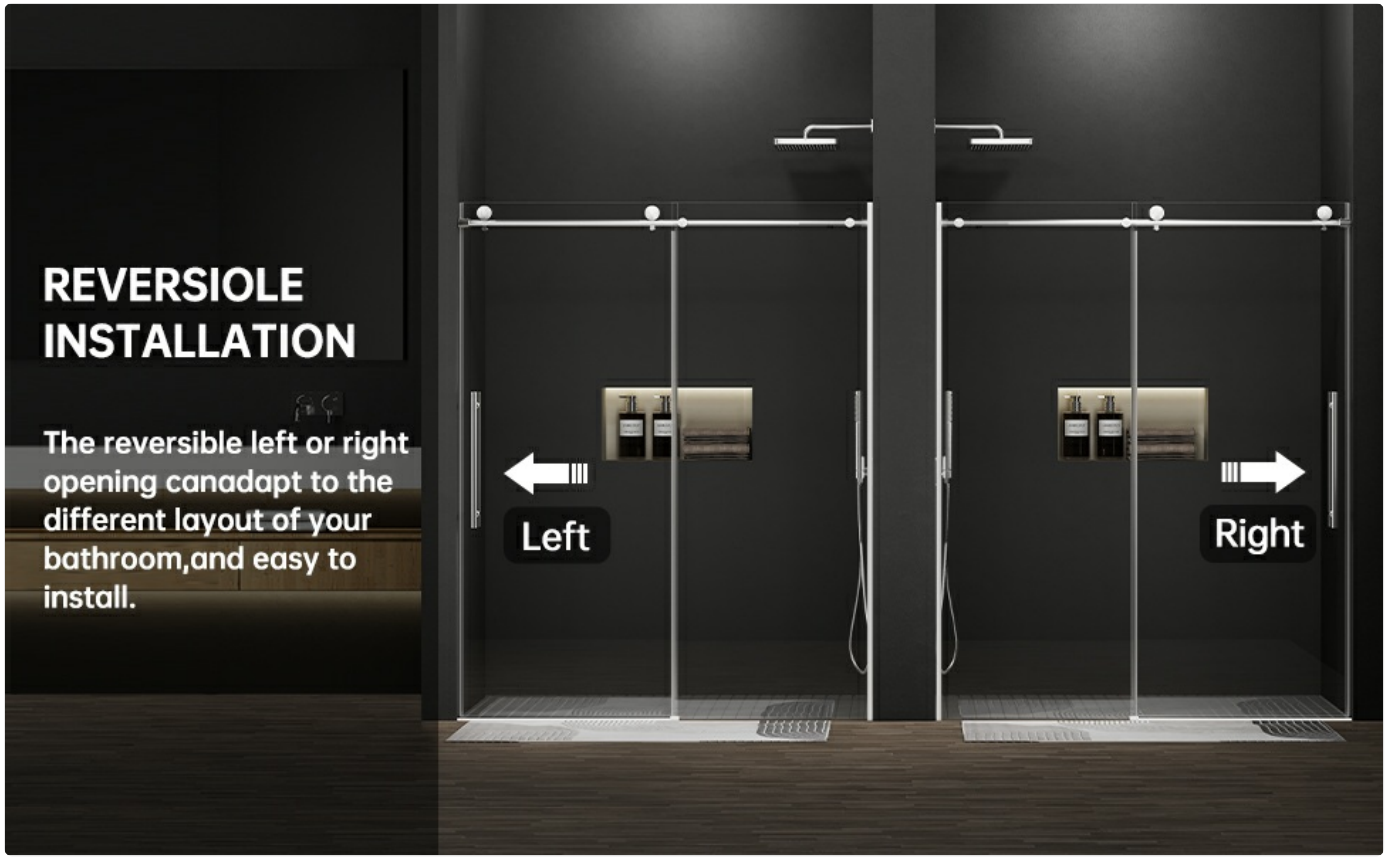


Figure 3: Waterproof Design with subtle groove to prevent dripping.



Figure 4: ANSI Certified Tempered Glass with explosion-proof film for safety.



Figure 5: Minimum Threshold Width Requirement (2.76 inches / 7cm).



Figure 6: Easy Glide Rollers and Reversible Installation Diagram.

Components List

Please verify that all components are present and undamaged before beginning installation. If any parts are missing or damaged, contact customer support.

Component	Quantity	Description
Upper Guide Rail	1	Main support rail for sliding panels.
Wall Jamb	1	Vertical profile for fixed glass panel.
Sliding Glass Panel	1	Movable glass panel.
Fixed Glass Panel	1	Stationary glass panel.
Rollers	2 sets	For smooth sliding of the door.
Guide Rail Brackets	2	Secures the upper guide rail to the wall.
Glass Brackets	Various	Secures glass panels to the rail.
Guide Block	1	Bottom guide for the sliding door.

Component	Quantity	Description
Anti-Splash Guard	1	Prevents water from escaping at the bottom.
Anti-Water Strips	Various	Seals for glass panel edges.
Bumper Strip	1	Protects glass from impact.
Anti-Fluctuator	1	Stabilizes the sliding panel.
Handles	2	Door handles (doubles as towel rack).
Wall Anchors & Screws	Various	For securing components to the wall.

Setup and Installation

Before you begin, ensure you have all necessary tools (tape measure, level, drill, screwdriver, sealant gun, safety glasses) and that your shower area meets the minimum threshold width requirement (2.76 inches / 7cm).

Your browser does not support the video tag.

Video: Official Findepot Shower Door Installation Steps. This video provides a visual guide to the installation process.

Step-by-Step Installation:

1. **Measure and Prepare:**
    - Measure the width of your shower opening to determine the required length of the Upper Guide Rail.
    - If necessary, cut the Upper Guide Rail to the appropriate length. Smooth any cut edges.
2. **Install Wall Jamb:**
    - Position the Wall Jamb on the interior wall of the bathroom.
    - Mark the hole locations through the Wall Jamb onto the wall.
    - Drill holes at the marked locations. Insert wall anchors into the drilled holes.
    - Secure the Wall Jamb to the wall using the provided screws.
3. **Prepare Glass Panels:**
    - Fix the Rollers to the sliding glass panel, aligning them with the pre-punched holes.
    - Carefully place the fixed glass panel into the Wall Jamb.
    - Fit the Upper Guide Rail onto the fixed glass panel for initial support and positioning.
4. **Install Guide Rail Brackets:**
    - Mark the location for the Guide Rail Brackets on the bathroom wall, ensuring proper alignment with the Upper Guide Rail.
    - Drill holes and insert wall anchors.
    - Secure the Guide Rail Brackets to the wall with screws.
    - Insert the Upper Guide Rail into the secured brackets and tighten the screws.
5. **Secure Glass Panels:**
    - Attach the remaining Glass Brackets to the Upper Guide Rail and secure the fixed glass panel.

- Fit the front half of the Guide Block underneath the fixed glass plate and tighten the screws.
- Insert the other part of the Guide Block and tighten the screws to secure it.
- Attach the sliding glass panel to the Upper Guide Rail using the rollers.
- Adjust the Glass Brackets on the sliding panel to achieve a horizontal position.

6. **Detailed Adjustments:**
   - Adjust the Anti-Fluctuator position to align the holes and secure the Roller Guards to the glass plate.
   - Test the sliding action of the door. Overlaps between panels can be adjusted up to 4 inches.
7. **Final Accessories and Sealing:**
   - Install the bathroom door handles on the sliding glass panel.
   - Use glue to stick the Anti-Splash Guard under the glass panel to the bathroom floor.
   - Glue the Anti-Water Strips onto the glass plates in their designated positions.
   - Apply silicone sealant around all edges of the shower door where it meets the wall and floor to ensure a watertight seal. Allow adequate drying time before use.

Operating Instructions

Your Findepot Frameless Sliding Shower Door is designed for ease of use and durability. To operate:

- Grasp the handle firmly.
- Gently slide the door open or closed. The soft-close mechanism will engage to ensure a quiet and smooth motion.
- Avoid forcing the door or attempting to open it beyond its designed travel limits.

Maintenance

Regular cleaning and maintenance will ensure the longevity and appearance of your shower door.

- **Glass Cleaning:** Clean glass panels regularly with a soft cloth and a non-abrasive glass cleaner. For best results, wipe down the glass after each use to prevent water spots and soap scum buildup. The glass features a protective coating for easier cleaning.
- **Hardware Cleaning:** Wipe down metal hardware with a soft, damp cloth. Avoid abrasive cleaners, scouring pads, or harsh chemicals, as these can damage the brushed nickel finish.
- **Seals:** Periodically inspect the anti-water strips and seals for wear or damage. Replace if necessary to maintain a watertight enclosure.
- **Rollers and Tracks:** Keep the rollers and top guide rail clean and free of debris to ensure smooth operation. A small amount of silicone lubricant can be applied to the rollers if they become stiff.

Troubleshooting

If you encounter any issues with your shower door, refer to the following common problems and solutions:

Problem	Possible Cause	Solution

Problem	Possible Cause	Solution
Door does not slide smoothly.	Debris in track, worn rollers, misaligned track.	Clean the top rail and rollers. Check rollers for damage and replace if needed. Verify the top rail is level and properly secured.
Water leaks from the enclosure.	Damaged or improperly installed seals/strips, insufficient sealant.	Inspect all seals and anti-water strips for proper placement and condition. Reapply silicone sealant where necessary. Ensure the Anti-Splash Guard is correctly installed.
Door is difficult to open/close.	Misaligned rollers or track, obstruction.	Check for any obstructions in the track. Ensure rollers are properly seated and aligned. Verify the door is not binding against the wall jamb or other glass panel.
Glass appears scratched or damaged.	Improper cleaning, impact.	Use only soft cloths and non-abrasive cleaners. Avoid sharp objects near the glass. If glass is cracked or severely damaged, it must be replaced for safety.

If the problem persists after attempting these solutions, please contact Findepot customer support.

Specifications

Feature	Detail
Brand	Findepot
Model Number	B0CZRZ8LTN
Color	Brushed Nickel
Material	Tempered Glass, Stainless Steel
Glass Thickness	5/16" (8mm)
Door Type	Frameless Sliding
Adjustable Width	56-60 inches
Height	75 inches
Assembly Required	Yes
Special Features	Soft-Close Design, Explosion-Proof Film, Easy-to-Clean Glass, Reversible Installation

Warranty and Support

Findepot products are manufactured to high-quality standards. For warranty information or technical support, please refer to the contact details below:

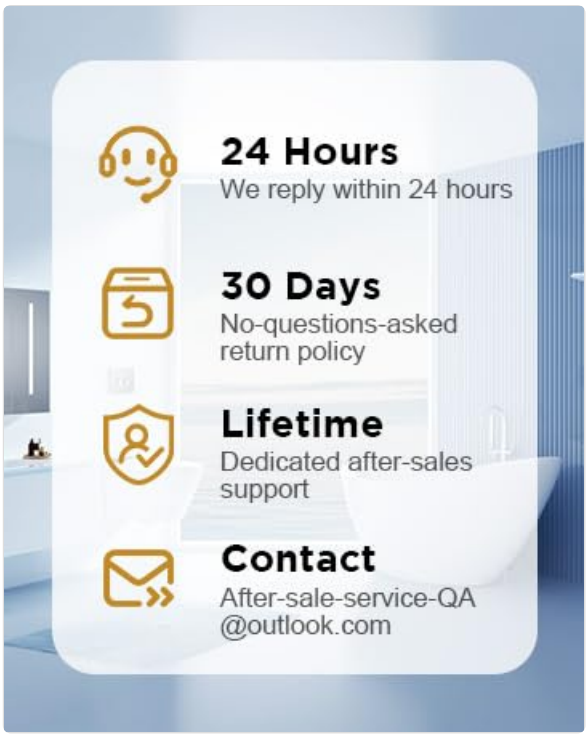


Figure 7: Findepot Customer Support Information.

- **Customer Service Email:** After-sale-service-QA@outlook.com
- **Response Time:** We aim to reply within 24 hours.
- **Return Policy:** 30-day easy returns, no-questions-asked.
- **After-Sales Support:** Dedicated lifetime support.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question