

- Manuals.plus /
- > [Kircuit](#) /
 - > Kircuit 36V AC/DC Adapter User Manual for ONN 100010682 ONA19AV902 Projector

Kircuit 79d0c450-0e25-4fa2-9c3c-a2f6b34805b1

Kircuit 36V AC/DC Adapter User Manual

Model: 79d0c450-0e25-4fa2-9c3c-a2f6b34805b1 | Brand: Kircuit

INTRODUCTION

This manual provides essential instructions for the safe and effective use of your Kircuit 36V AC/DC Adapter. This adapter is designed to convert AC power into the DC power required by compatible devices, specifically the ONN 100010682 ONA19AV902 HD Projector. Please read this manual thoroughly before use and retain it for future reference.



Image: The Kircuit 36V AC/DC adapter unit shown with both the AC input cord and the DC output cord.

SAFETY INFORMATION

To ensure safe operation and prevent damage, observe the following precautions:

- Do not expose the adapter to water, moisture, or extreme temperatures.
- Do not disassemble or modify the adapter.
- Ensure the adapter is used with devices that match its voltage and current specifications.
- Avoid placing heavy objects on the power cords.
- Unplug the adapter from the power outlet when not in use for extended periods.
- Keep out of reach of children.

PACKAGE CONTENTS

Verify that all items are present in your package:

- 1 x Kircuit 36V AC/DC Adapter Unit
- 2 x Power Cords (one AC input cord, one DC output cord)



Image: The adapter unit and its two detachable power cords, ready for assembly.

SETUP INSTRUCTIONS

1. **Connect the AC Input Cord:** Take the power cord with the two-prong plug (AC input cord) and connect its C7 connector end into the corresponding port on the Kircuit 36V AC/DC Adapter unit.
2. **Connect the DC Output Cord:** Take the power cord with the barrel plug (DC output cord) and connect its C7 connector end into the other corresponding port on the Kircuit 36V AC/DC Adapter unit. The barrel plug end will connect to your device.
3. **Connect to Device:** Insert the barrel plug of the DC output cord into the power input port of your ONN 100010682 ONA19AV902 HD Projector.
4. **Connect to Power Outlet:** Plug the two-prong AC input cord into a standard 100-240V AC electrical wall outlet.

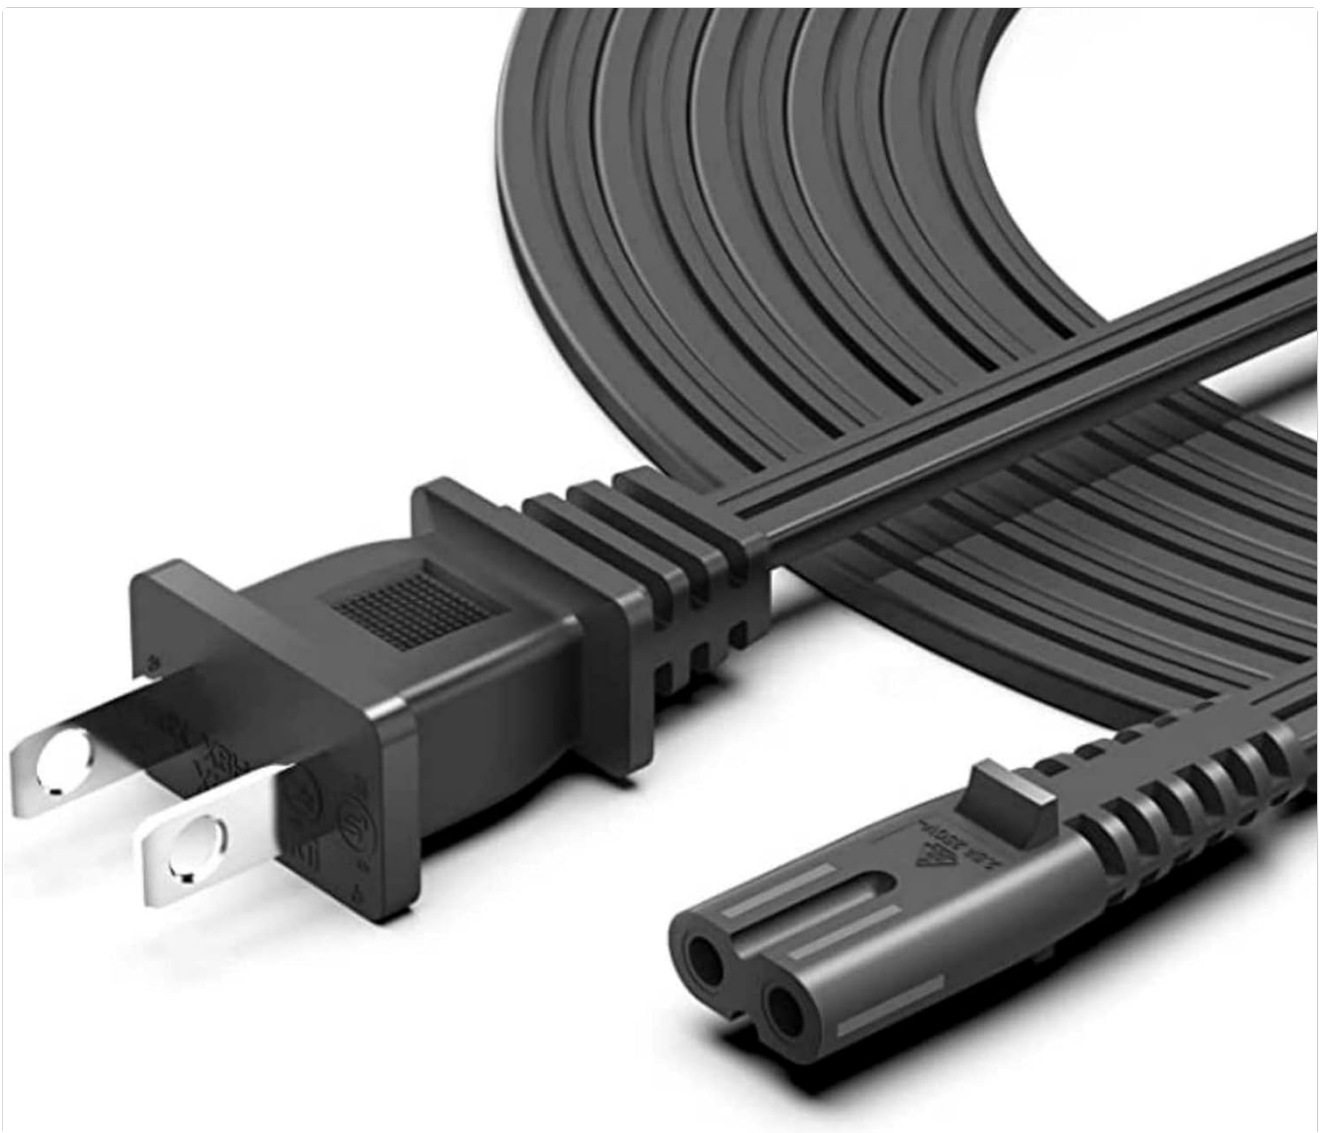


Image: A detailed view of the AC input power cord, showing the wall plug and the C7 connector that attaches to the adapter unit.



Image: The Kircuit adapter unit connected to a wall outlet, demonstrating a typical setup for powering a device.

OPERATING INSTRUCTIONS

Once properly connected, the adapter will supply power to your compatible device. The adapter is designed for continuous operation within its specified voltage and current limits.

- Ensure the adapter is placed in a well-ventilated area to prevent overheating.
- The adapter features OVP (Over Voltage Protection), OCP (Over Current Protection), and SCP (Short Circuit Protection) for safe operation.
- A small indicator light on the adapter unit may illuminate when power is supplied.

MAINTENANCE

Proper maintenance ensures the longevity and reliable performance of your adapter:

- **Cleaning:** Disconnect the adapter from the power outlet and your device before cleaning. Use a soft, dry cloth to wipe the surface. Do not use liquid cleaners or solvents.

- **Storage:** When not in use, store the adapter in a cool, dry place, away from direct sunlight and moisture. Avoid tightly coiling the cords to prevent damage.
- **Inspection:** Periodically inspect the power cords and adapter unit for any signs of damage, such as cuts, fraying, or bent pins. If damage is found, discontinue use and replace the adapter.

TROUBLESHOOTING

If you encounter issues with your adapter, refer to the following common problems and solutions:

- **No Power to Device:**
 - Ensure all connections (AC cord to adapter, DC cord to adapter, DC cord to device, AC cord to wall outlet) are secure.
 - Verify the wall outlet is functional by plugging in another device.
 - Check if the adapter or device has an indicator light that is not illuminated.
- **Adapter Overheating:**
 - Ensure the adapter is in a well-ventilated area and not covered.
 - Confirm that the connected device is compatible and not drawing excessive power.
- **Loose Connection:**
 - Inspect the barrel plug and the device's power port for any debris or damage.

If problems persist, discontinue use and contact customer support.

SPECIFICATIONS

Feature	Detail
Brand	Kircuit
Model Number	79d0c450-0e25-4fa2-9c3c-a2f6b34805b1
Input Voltage	100-240V AC, 50/60Hz
Output Voltage	36V DC
Connector Type	Barrel Plug
Compatible Devices	ONN 100010682, ONA19AV902 HD Projector
Protection Features	OVP, OCP, SCP (Over Voltage, Over Current, Short Circuit Protection)
Material	Plastic
Color	Black

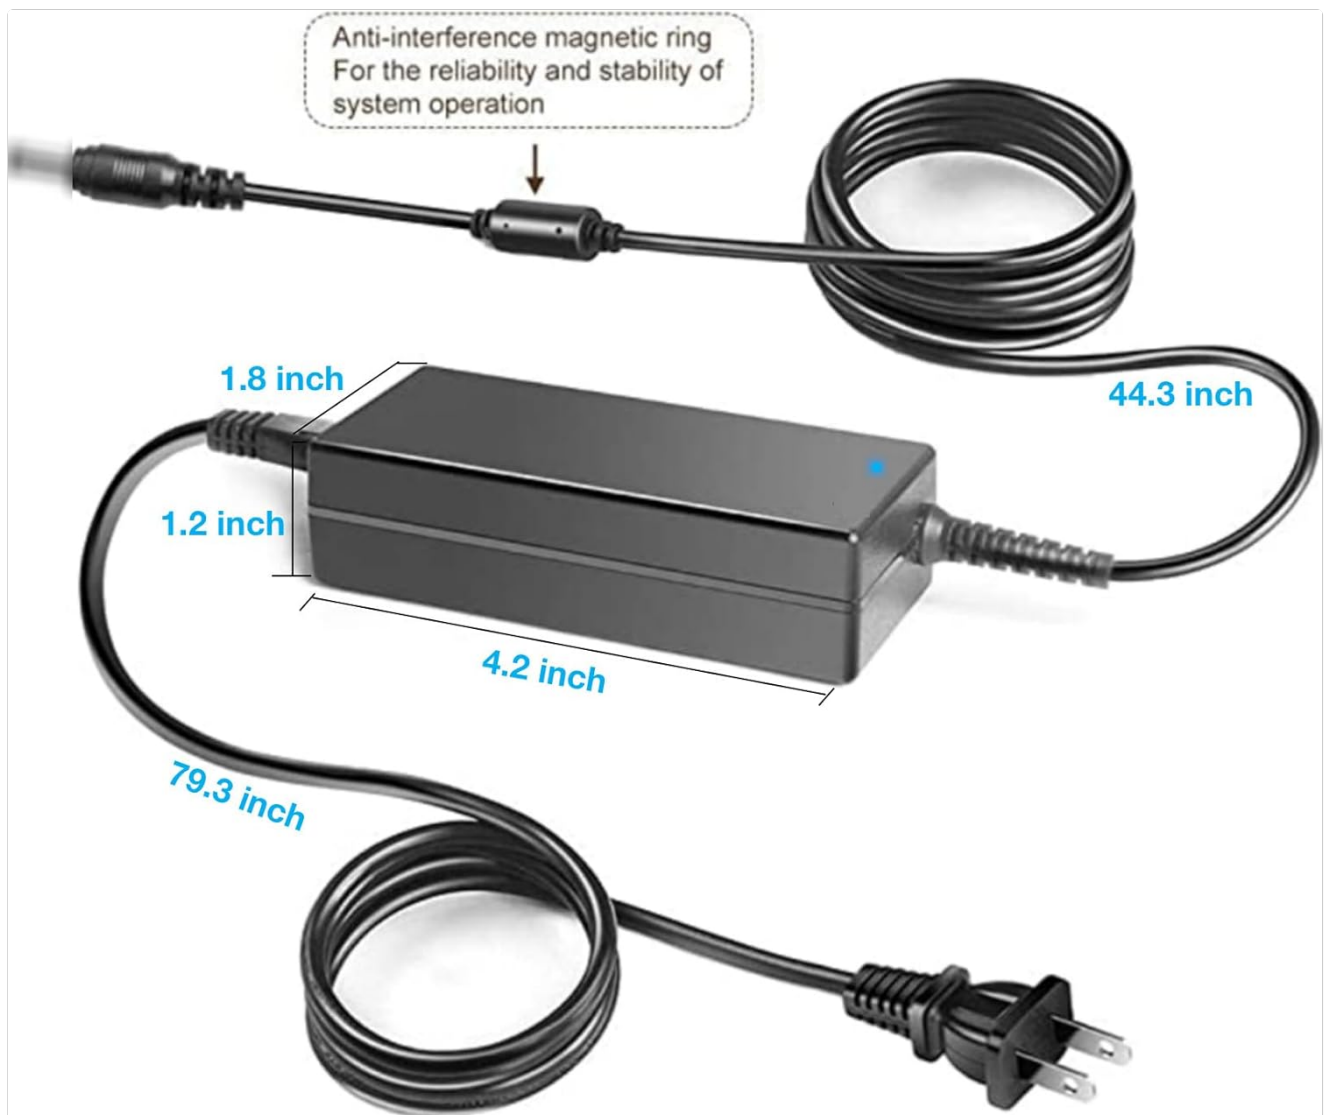


Image: The adapter unit displaying its dimensions (e.g., 4.2 inches length, 1.8 inches width, 1.2 inches height) and highlighting the anti-interference magnetic ring on the DC output cable.

WARRANTY INFORMATION

Please refer to the product packaging or the manufacturer's official website for detailed warranty information. Typically, Kircuit products come with a limited warranty covering manufacturing defects.

CUSTOMER SUPPORT

For technical assistance, troubleshooting beyond this manual, or warranty claims, please contact Kircuit customer support through their official channels. Contact information can usually be found on the product packaging or their website.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0D25VVBK5>

More documents and user manuals: **<https://manuals.plus/>**