

[manuals.plus](#) /

› [VEVOR](#) /

› [VEVOR Interlocking Garage Floor Tiles JQ-3050BU Instruction Manual](#)

## VEVOR JQ-3050BU

# VEVOR Interlocking Garage Floor Tiles JQ-3050BU Instruction Manual

Brand: VEVOR | Model: JQ-3050BU

## 1. INTRODUCTION

The VEVOR Interlocking Garage Floor Covering Tiles are designed to provide durable and versatile floor protection for various environments. These 12x12x0.53 inch tiles feature a non-slip, double-sided texture, making them suitable for garages, basements, repair shops, and car exhibitions. They offer robust load-bearing capabilities and are engineered for easy installation and maintenance.



Image 1.1: VEVOR Interlocking Garage Floor Tiles providing all-around floor protection in a garage.

### Key Features:

- Multi-scene Versatility:** Suitable for professional garages, personal warehouses, repair shops, and car exhibitions.
- High Load Capacity:** Capable of supporting up to 5500 lbs without damage, ideal for heavy vehicles.
- Upgraded Interlocking System:** Features 6 interlocking loops for smooth, seamless installation without special tools or glue.
- Easy to Clean:** 3D diamond-textured surface and rhombic grid bottom layer facilitate simple cleaning with regular mopping and vacuuming.
- Superior Protection:** Provides comprehensive floor protection and excellent non-slip properties.

*Note: Products purchased before 2024 are not compatible with the upgraded interlocking system of the*

2024 model.

## 2. SETUP AND INSTALLATION

Installing your VEVOR Interlocking Garage Floor Tiles is a straightforward process designed for efficiency. Follow these steps for optimal results:

- 1. Prepare the Surface:** Ensure the floor surface is clean and free of debris before installation.
- 2. Lay the First Row:** Begin by laying the first row of tiles along a straight edge of your desired area.
- 3. Interlock Tiles:** Connect subsequent tiles by aligning the interlocking loops and pressing them firmly together. The upgraded 6-loop system ensures a secure and seamless fit. No special tools or glue are required.
- 4. Allow for Expansion:** Leave a small gap (approximately 1/4 inch) around the perimeter of the installation area to accommodate for potential expansion due to temperature changes.
- 5. Cutting Tiles:** If necessary, tiles can be cut to fit around obstacles or irregular shapes using a handsaw or circular saw.

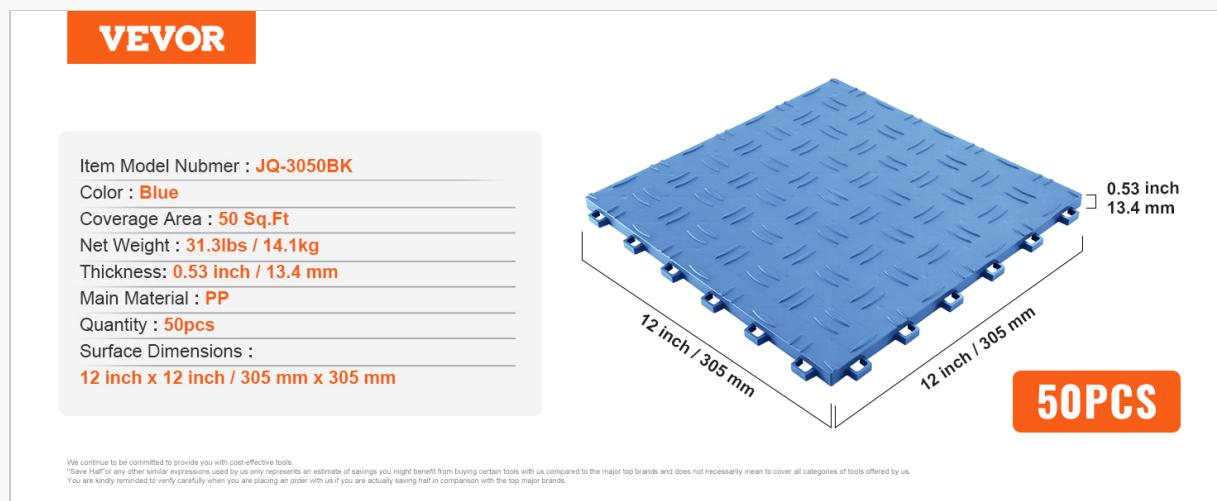


Image 2.1: Visual guide for the simple two-step installation process: cleaning the surface and tightening interlocking loops.

The tiles are designed to lay flat without creases, providing an outstanding grip and preventing movement once installed.



Image 2.2: Detail of the upgraded 6 interlocking loops for secure and easy assembly.

### 3. OPERATING INSTRUCTIONS

Once installed, your VEVOR Interlocking Garage Floor Tiles are ready for immediate use. These tiles are engineered for high performance in demanding environments:

- **Vehicle Traffic:** The tiles can withstand heavy vehicle traffic, including large trucks, due to their 5500 lbs load capacity.
- **Work Area:** Provides a stable and protective surface for working on vehicles or other projects. The non-slip texture enhances safety.
- **Versatile Use:** Ideal for protecting floors from spills, stains, and wear in various settings.



Image 3.1: VEVOR tiles providing a durable surface for automotive work.

# ONE MAT FOR VARIOUS SPACES

Provide multi-purpose protection



Image 3.2: Tiles demonstrating multi-purpose protection in a warehouse setting with heavy machinery.

## 4. MAINTENANCE


Maintaining your VEVOR Interlocking Garage Floor Tiles is simple, ensuring their longevity and appearance:

- **Regular Cleaning:** The 3D diamond-textured surface and rhombic grid bottom layer are designed for easy cleaning. Regular mopping and vacuuming are sufficient to maintain cleanliness.
- **Spill Cleanup:** Promptly clean up any spills to prevent staining, although the polypropylene material is resistant to many common garage fluids.
- **Hosing Off:** For a deeper clean, the tiles can be hosed off. Ensure proper drainage if cleaning with water.

## SIMPLE TWO-STEP, EASILY COMPLETE THE INSTALLATION



**STEP1 : Clean the Surface Before Installation**

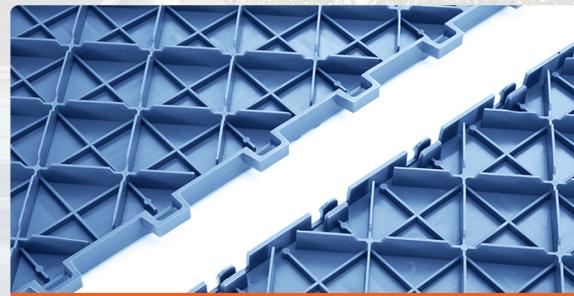


**STEP2 : Tighten the side interlocking loops to secure**

Image 4.1: Demonstrating the ease of cleaning the tiles by simply hosing them off or wiping them down.

The tiles provide comprehensive protection, keeping your underlying floor clean and new-looking, free from usage marks, gasoline stains, tire marks, or dirty water.

## COMPREHENSIVE FLOOR PROTECTION

Keep floors clean and new-looking

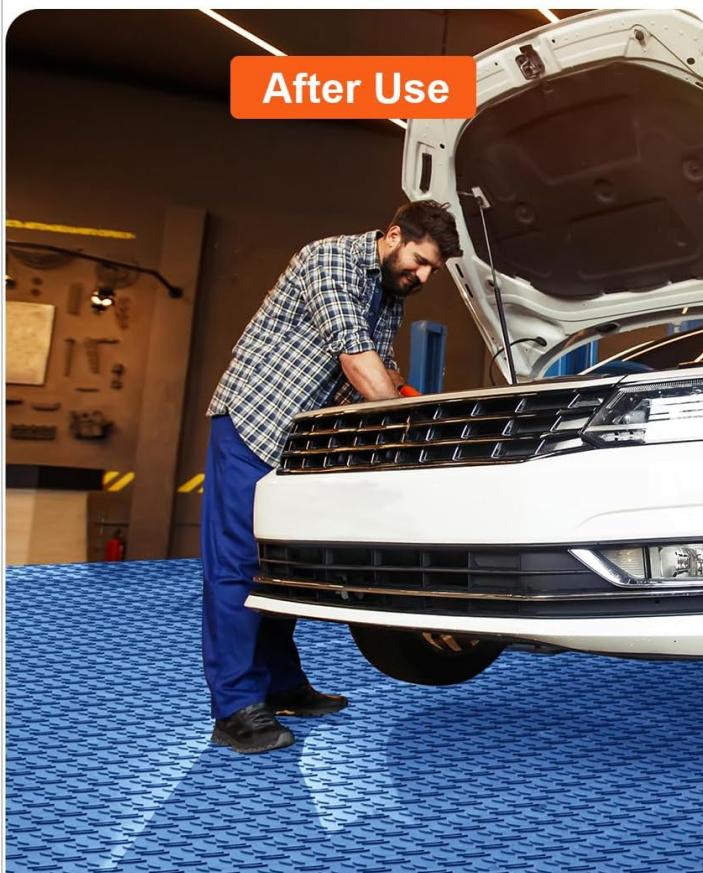

**No Usage Marks  
Floor Remains Clean and New**



**Gasoline Stains  
Tire Marks  
Dirty Water**

Image 4.2: Visual comparison showing a clean floor after tile installation versus a dirty floor before use.

## 5. TROUBLESHOOTING


While VEVOR Interlocking Garage Floor Tiles are designed for durability and ease of use, some situations may require attention:

- **Tile Buckling:** In warm sunlight or with significant temperature changes, tiles may expand and buckle slightly. This is often temporary and they typically flatten by themselves. Ensure adequate expansion gaps were left during installation.
- **Hollow Sound When Walking:** A slight hollow tapping sound may occur when walking on the tiles, especially if the underlying floor is not perfectly flat. This is generally not an issue affecting performance or durability.
- **Damaged Tiles:** While durable, extreme impacts (e.g., dropping heavy, sharp objects) can potentially damage a tile. Individual tiles can be replaced if necessary.
- **No Edge Transition Pieces:** Currently, specific edge transition pieces for this model may not be readily available. Consider alternative solutions for finishing edges if a smooth transition is desired.

## 6. SPECIFICATIONS

Detailed specifications for the VEVOR Interlocking Garage Floor Covering Tiles (Model JQ-3050BU):

Feature	Specification
Item Model Number	JQ-3050BU
Dimensions (per tile)	12 x 12 x 0.53 inches (305 x 305 x 13.4 mm)
Item Thickness	0.53 Inches (13.4 mm)
Material	Polypropylene (PP)
Load Capacity	Up to 5500 lbs
Color	Blue
Item Form	Tiles
Shape	Square
Item Weight (50 Pack)	32.3 Pounds (14.1 kg)
UPC	197988432302

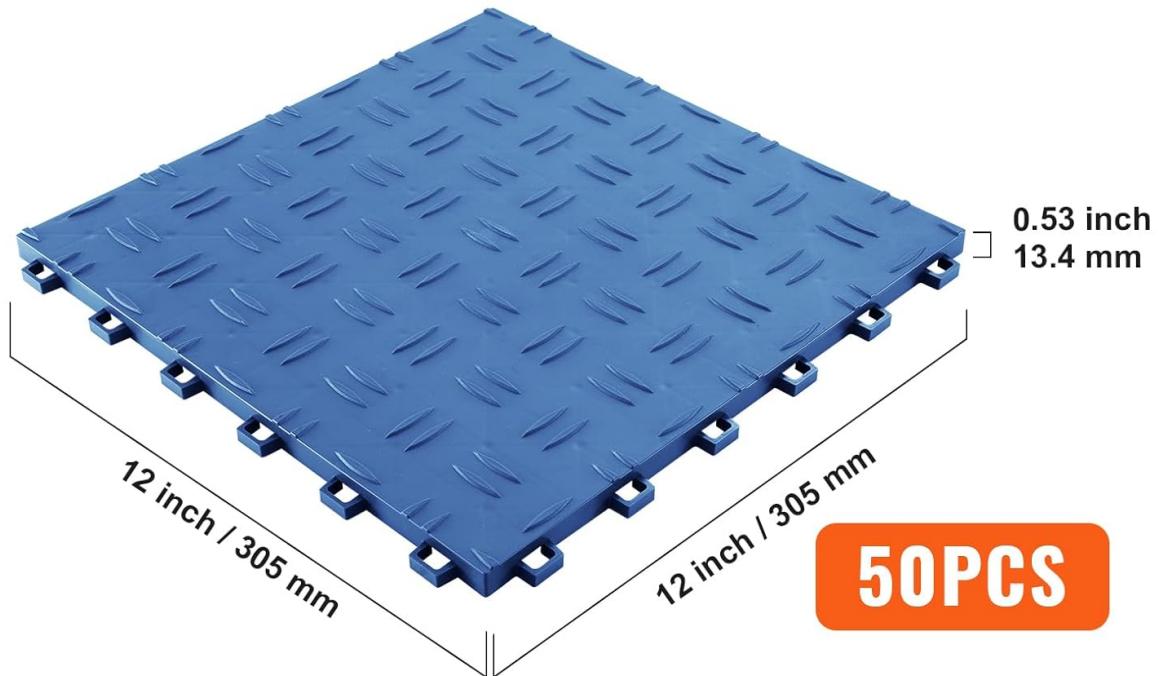

Item Model Number : **JQ-3050BK**

Color : **Blue**

Coverage Area : **50 Sq.Ft**

Net Weight : **31.3lbs / 14.1kg**

Thickness: **0.53 inch / 13.4 mm**

Main Material : **PP**

Quantity : **50pcs**

Surface Dimensions : **12 inch x 12 inch x 0.53 inch / 305 mm x 305 mm x 13.4 mm**

Image 6.1: Visual representation of tile dimensions and key specifications.

## 7. WARRANTY AND SUPPORT

For warranty information and customer support, please refer to the official VEVOR website or contact their customer service directly. Details regarding product returns and replacements are typically available through your purchase platform or VEVOR's support channels.

For additional resources and product information, visit the [VEVOR Store on Amazon](#).