Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

onerbl 19V AC-DC Power Adapter

onerbl 19V AC-DC Adapter for Jlink F32FR1K 32-Inch Gaming Monitor: Instruction Manual

1. Introduction

This instruction manual provides essential information for the safe and effective use of your onerbl 19V AC-DC Power Adapter. This adapter is specifically designed as a replacement power supply for the Jlink J-Link F32FR1K 32-Inch 1080P FHD 240Hz Curved Gaming Monitor. It converts standard AC wall power into the required 19V DC power for your device.

The adapter is manufactured with quality materials and tested to ensure compatibility and reliable performance. Please read this manual thoroughly before use and retain it for future reference.

2. Safety Information

To prevent electric shock, fire, or damage to the product, please observe the following safety precautions:

- Use the adapter only with compatible devices as specified (Jlink J-Link F32FR1K 32-Inch Gaming Monitor).
- Do not expose the adapter to water, moisture, or extreme temperatures.
- Avoid dropping or subjecting the adapter to severe impact.
- Do not attempt to open, modify, or repair the adapter. Refer servicing to qualified personnel.
- Ensure the power outlet is easily accessible and unplug the adapter during lightning storms or when unused for extended periods.
- Keep the adapter away from heat sources and ensure adequate ventilation to prevent overheating.
- Inspect the adapter and cables for any signs of damage before each use. Do not use if damaged.

3. Package Contents

Verify that all items are present in the package:

- 1 x onerbl 19V AC-DC Power Adapter
- 1 x AC Power Cord (for connecting to wall outlet)



Image 1: The onerbl 19V AC-DC Power Adapter shown with its detachable AC power cord. The adapter unit is black with a blue indicator light, and the cords are also black.

4. Setup Instructions

Follow these steps to connect your power adapter:

1. **Connect the AC Power Cord:** Insert the two-prong end of the AC power cord into the corresponding port on the onerbl 19V AC-DC Power Adapter.
2. **Connect to Monitor:** Plug the DC output connector (the round barrel connector) from the adapter into the power input port on your Jlink J-Link F32FR1K 32-Inch Gaming Monitor. Ensure a secure connection.
3. **Connect to Wall Outlet:** Insert the standard two-prong plug of the AC power cord into a functional wall power outlet.
4. **Verify Power:** The blue indicator light on the adapter should illuminate, indicating that power is being supplied. Your monitor should now receive power.



Image 2: The onerbl AC-DC Power Adapter shown in a typical setup, with the AC cord plugged into a wall outlet and the DC output connected to a device (monitor not fully visible). The blue indicator light on the adapter is illuminated.

5. Operating Instructions

The onerbl 19V AC-DC Power Adapter operates automatically once connected. It provides a stable 19V DC output to power your compatible Jlink monitor. There are no user-adjustable settings on the adapter itself.

- The adapter is designed for continuous operation.
- It features over-voltage and over-heat protection for safe operation.
- A blue LED indicator confirms the adapter is receiving power and functioning.

6. Maintenance

Proper maintenance ensures the longevity and reliable performance of your power adapter:

- **Cleaning:** Disconnect the adapter from the power outlet and the monitor before cleaning. Use a soft, dry cloth to wipe the surface. Do not use liquid cleaners or abrasive materials.
- **Storage:** When not in use, store the adapter in a cool, dry place, away from direct sunlight and extreme

temperatures. Avoid tightly coiling the cables to prevent damage.

- **Cable Care:** Do not bend, twist, or pinch the power cords excessively. Regularly check cables for cuts, fraying, or exposed wires.

7. Troubleshooting

If you encounter issues with your power adapter, try the following steps:

- **No Power to Monitor:**
  - Ensure the AC power cord is securely plugged into both the adapter and the wall outlet.
  - Verify the DC output connector is firmly inserted into the monitor's power port.
  - Check if the blue LED indicator on the adapter is lit. If not, try a different wall outlet.
  - Confirm the monitor itself is powered on and functioning correctly.
- **Adapter Overheating:**
  - Ensure the adapter is in a well-ventilated area and not covered.
  - Disconnect the adapter and allow it to cool down. Reconnect only after it has cooled.
  - If overheating persists, discontinue use and contact support.
- **Loose Connection:** If the power connection feels loose, ensure the correct adapter is being used for your monitor and that all plugs are fully seated.

If these steps do not resolve the issue, please contact customer support.

8. Specifications

Input Voltage	AC 100-240V, 50/60Hz
Output Voltage	DC 19V
Compatibility	Jlink J-Link F32FR1K 32-Inch 1080P FHD 240Hz Curved Gaming Monitor
Protection Features	Over Voltage Protection, Over Heat Protection
Cable Length (Total)	Approximately 127.8 inches (324.6 cm)

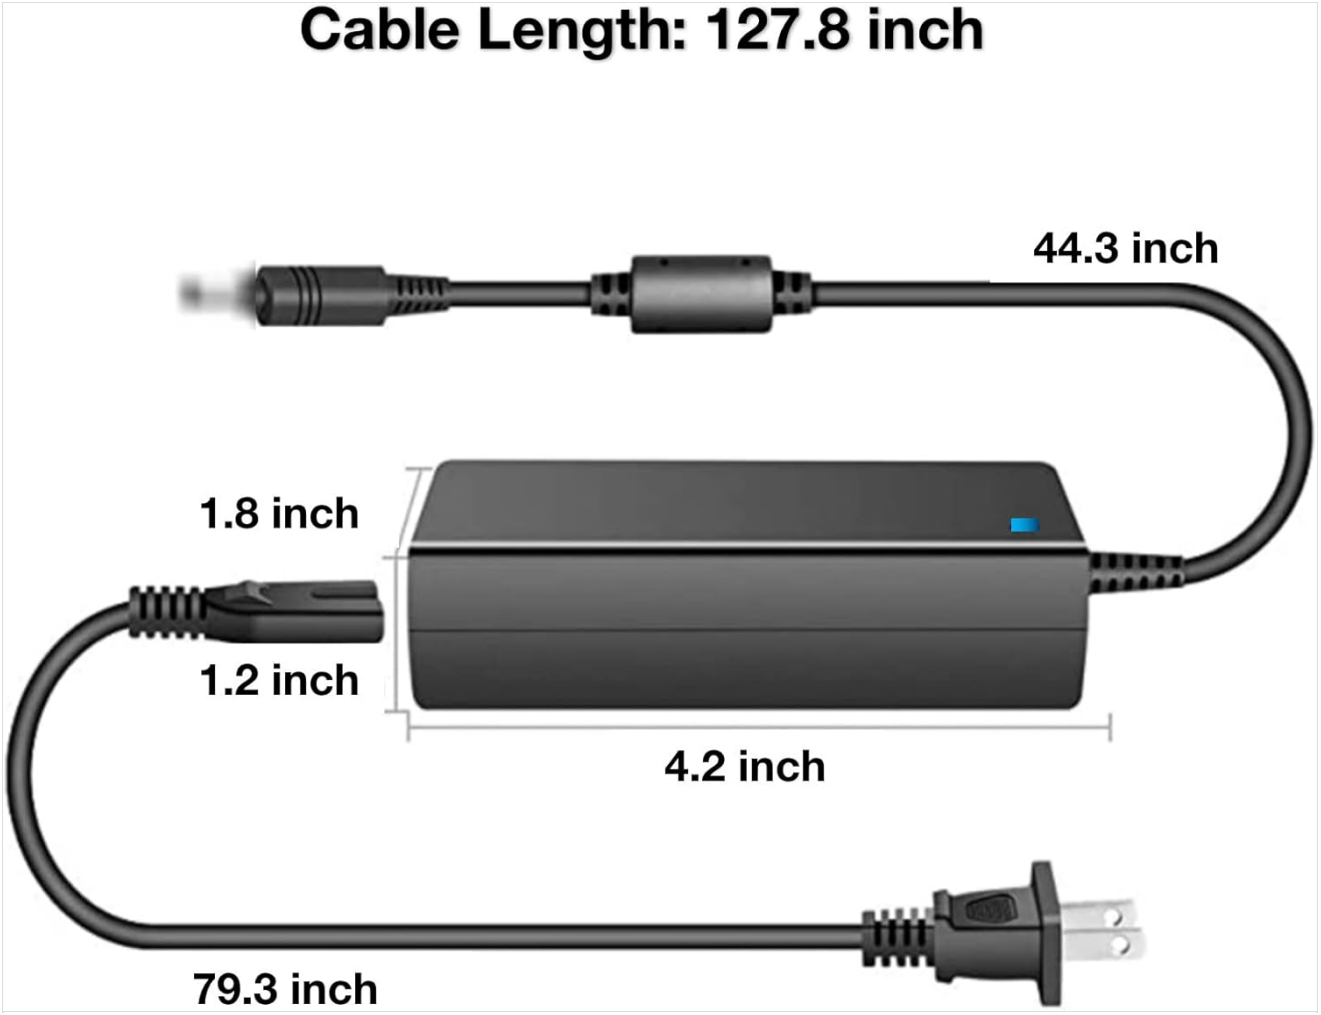


Image 3: A diagram illustrating the dimensions of the onerbl AC-DC Power Adapter and its associated cables. The total cable length is approximately 127.8 inches, with the adapter unit measuring 4.2 inches in length.

9. Warranty and Support

This product is covered by a standard return policy, typically allowing returns or replacements within 30 days of purchase. For specific warranty details, technical assistance, or to report any issues, please contact the seller directly through your purchase platform.

Please provide your order number and a detailed description of the issue when contacting support to facilitate a quicker resolution.

© 2024 onerbl. All rights reserved. Information subject to change without notice.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0D2HM22FY

More documents and user manuals: **https://manuals.plus/**