Puroma LB002

Puroma LB002 Resettable Combination Key Lock Box User Manual

Model: LB002

Introduction

This manual provides comprehensive instructions for the setup, operation, and maintenance of your Puroma LB002 Resettable Combination Key Lock Box. Please read these instructions carefully before use to ensure proper functionality and security.



Image: The Puroma LB002 Key Lock Box, shown with its combination dial set to 1111 and the compartment open, revealing space for keys.

The Puroma LB002 is designed to provide a secure and convenient solution for storing keys, offering both wall-mounted and portable hanging options. Its robust construction and resettable combination mechanism

ensure reliable protection for your valuables.

What's in the Box

Verify that all components are present upon unboxing:

- Aluminum Zinc Alloy Lock Body
- Steel Lock Shackle
- Screws (for wall mounting)

Features

- **Dual Installation Options:** Can be wall-mounted or hung on a doorknob using the removable shackle.
- **Large Capacity:** Ample internal space to store multiple house keys, key fobs, or bank cards.
- **Resettable 4-Digit Combination:** Offers 10,000 possible codes for enhanced security.
- **Durable Construction:** Made from premium aluminum alloy and reinforced steel to resist hammering, sawing, crushing, and prying.
- **Weather Protection:** Features a protective shutter and rubber plugs to prevent dust and rainwater from entering the lock box.
- **U-shaped Spring:** Ensures the box cover pops open automatically for easy access.

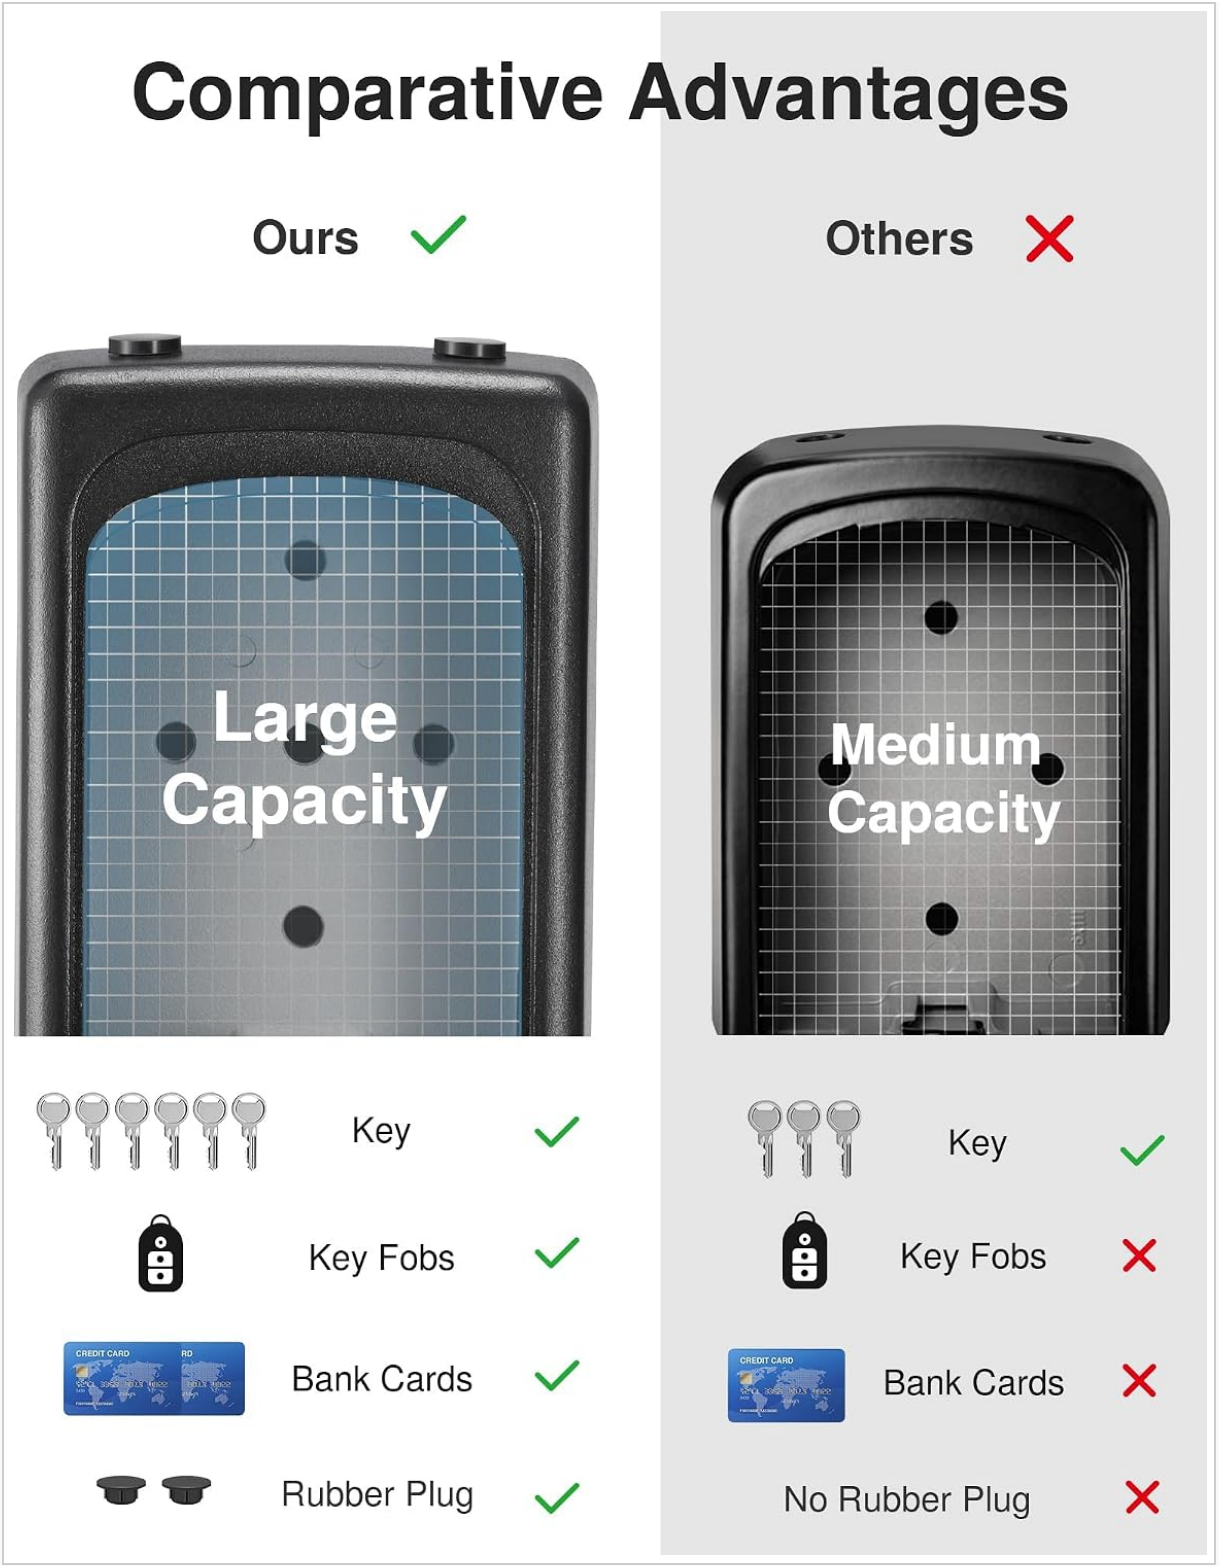


Image: A visual comparison highlighting the large internal capacity of the Puroma lock box, capable of holding multiple keys, key fobs, and bank cards, compared to a smaller capacity alternative.

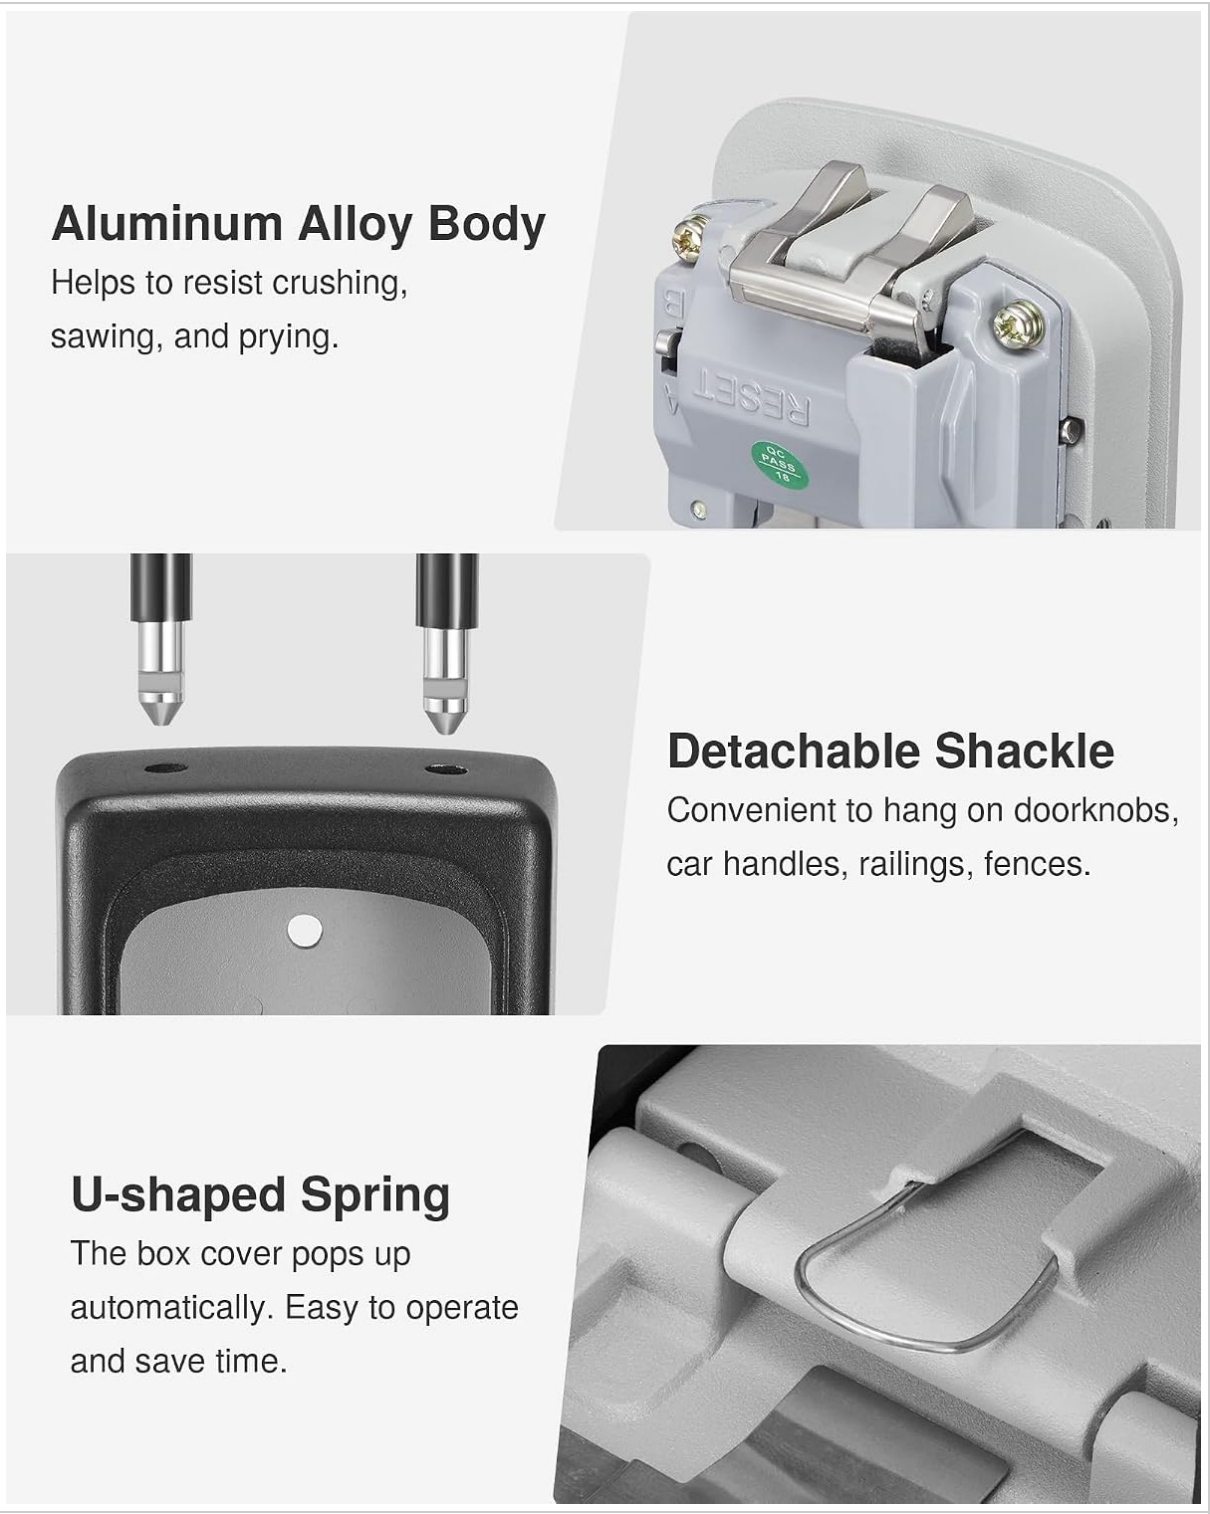


Image: Close-up views illustrating key features: the robust aluminum alloy body, the detachable shackle for versatile mounting, and the U-shaped spring mechanism for automatic cover opening.

Setup

Setting Your New Combination

The default combination is 0-0-0-0. Follow these steps to set your personalized code:

1. Open the key box using the default combination (0-0-0-0).
2. Locate the RESET button inside the lock box. Push the RESET button from position A to position B.
3. Set your desired new 4-digit combination by rotating the dials.
4. Push the RESET button back from position B to position A to confirm the new combination.

5. Close the lock box and scramble the dials to secure it. Test your new combination before closing the box completely.



Image: A series of four images demonstrating the process of setting a new combination: opening with default code, moving the reset lever, setting new numbers, and returning the lever.

Mounting Options

The Puroma LB002 offers two primary mounting methods:

Option 1: Hanging on a Doorknob

1. Open the lock box using the correct combination.
2. Push the inner button from right to left to release the shackle.
3. Pull up the shackle to detach it from the lock box.
4. Position the shackle around the doorknob or handle.
5. Reinsert the shackle into the lock box until it clicks securely into place.



Image: A three-step visual guide showing how to detach the shackle, position it on a doorknob, and reattach the lock box for hanging installation.

Option 2: Wall Mounting

1. Open the lock box and use it as a template to mark the position of the four mounting holes on the wall with a pencil.
2. Drill holes at the marked positions using an appropriate drill bit for your wall material.

3. Insert the provided expansion plugs into the drilled holes.
4. Align the lock box with the holes and secure it to the wall using the provided screws and a Phillips screwdriver.



Image: A four-step visual guide demonstrating wall-mounting: marking holes, drilling, inserting plugs, and screwing the lock box into place.



Image: An illustration of the two available mounting types: securely mounted on a wall and conveniently hung on a doorknob.

Operation

Opening the Lock Box

1. Slide down the protective shutter to reveal the combination dials.
2. Rotate the dials to your set 4-digit combination.
3. Pull the cover of the lock box outwards to open it. The U-shaped spring will assist in opening.

Closing and Securing the Lock Box

1. Place your keys or other items inside the compartment.
2. Close the cover firmly until it latches.

3. Scramble the combination dials to lock the box and prevent unauthorized access.
4. Slide up the protective shutter to cover the dials and protect them from elements.

Maintenance

- **Regular Cleaning:** Wipe the exterior with a soft, damp cloth to remove dust and grime. Avoid abrasive cleaners.
- **Combination Dials:** Periodically check that the dials rotate smoothly. If they become stiff, a small amount of graphite lubricant can be applied.
- **Weather Protection:** Ensure the protective shutter is always closed when not in use to shield the dials from weather conditions. The included rubber plugs for the wall-mount holes help prevent water seepage.
- **Inspection:** Regularly inspect the lock box and shackle for any signs of wear or damage.



Image: A diagram showing the protective shutter covering the combination dials and the placement of rubber plugs to prevent rainwater from entering the lock box.

TROUBLESHOOTING

- **Cannot Open Lock Box:**
  - Ensure the correct combination is entered. Double-check each digit.
  - Verify that the dials are aligned precisely with the indicator marks.
  - If the dials are stiff, try gently wiggling them while entering the code.
- **Cannot Reset Combination:**
  - Make sure the lock box is open with the current correct combination entered.

- Ensure the RESET button is fully pushed from A to B before setting new numbers, and fully returned from B to A after setting.

- **Shackle is Stuck:**
  - Ensure the lock box is open and the internal release button is fully pressed.
  - Check for any debris obstructing the shackle mechanism.

Specifications



Image: A technical drawing illustrating the key dimensions of the Puroma LB002 lock box, including height, width, and depth.

Feature	Detail

Feature	Detail
Brand	Puroma
Model Number	LB002
Product Dimensions	1.57"D x 3.5"W x 7.36"H
Lock Type	Mechanical Code Lock (4-digit resettable combination)
Material	Aluminum Zinc Alloy, Steel
Mounting Type	Wall Mount, Hanging
Item Weight	1.2 Pounds
Water Resistance Level	Water Resistant (with protective shutter and plugs)

Warranty and Support

For warranty information or technical support, please refer to the official Puroma website or contact their customer service directly. Specific warranty terms may vary by region and purchase date.

© 2025 Puroma. All rights reserved.