

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [HOMVILLA](#) /

› [HOMVILLA Digital Alarm Clock User Manual](#)

HOMVILLA jhjswe-5958

HOMVILLA Digital Alarm Clock

USER MANUAL

Product Overview

The HOMVILLA Digital Alarm Clock is a versatile and modern device designed to enhance your daily routine. It features a large LED mirror display, dual alarm settings, temperature display, and multiple adjustable functions for personalized use. This manual provides detailed instructions for setup, operation, maintenance, and troubleshooting.



Front view of the HOMVILLA Digital Alarm Clock, displaying time and temperature.

Key Features

- **Large LED Mirror Display:** A 5.7 x 2.6 inch screen for easy readability, including time and temperature.

- **Dual Power Modes:** Operates via USB cable for continuous display or built-in lithium battery for voice-activated display.
- **Two Independent Alarms:** Set two distinct alarms with 10 selectable melodies.
- **Voice Activation:** In battery mode, activate the display with sound (e.g., a clap).
- **Snooze Function:** Easily delay the alarm by 5 minutes.
- **Adjustable Brightness & Volume:** Four brightness levels and three volume levels to suit your preferences.
- **Memory Function:** Retains settings even after power loss.



2 Sets Alarm Setting

Two sets of alarms can be set in one day meet different time needs, reasonable planning time



The clock offers multiple functions including time, music, 12/24 hour format, voice command, snooze, temperature, memory, and alarm.

Setup

1. **Unpacking:** Carefully remove the alarm clock from its packaging.
2. **Initial Power-Up:** Connect the included USB cable to the clock and a 5V/1A or 5V/2A USB adapter (not included) or a USB port. The LED display will light up.
3. **Battery Charging:** If using battery power, ensure the clock is fully charged before first use. The LED light will remain on continuously when connected via USB. When running on battery, the LED light will

automatically turn off after 6 seconds of activation to conserve power.

4. **Temperature Calibration:** For accurate temperature display, leave the alarm clock stationary for more than 30 minutes after unpacking.

4 Levels of Brightness Adjusted

Power saving
Soft lighting helps you fall asleep easily



①



②



③



④



Rear view of the clock, illustrating button layout for settings and the USB power input.

Operating Instructions

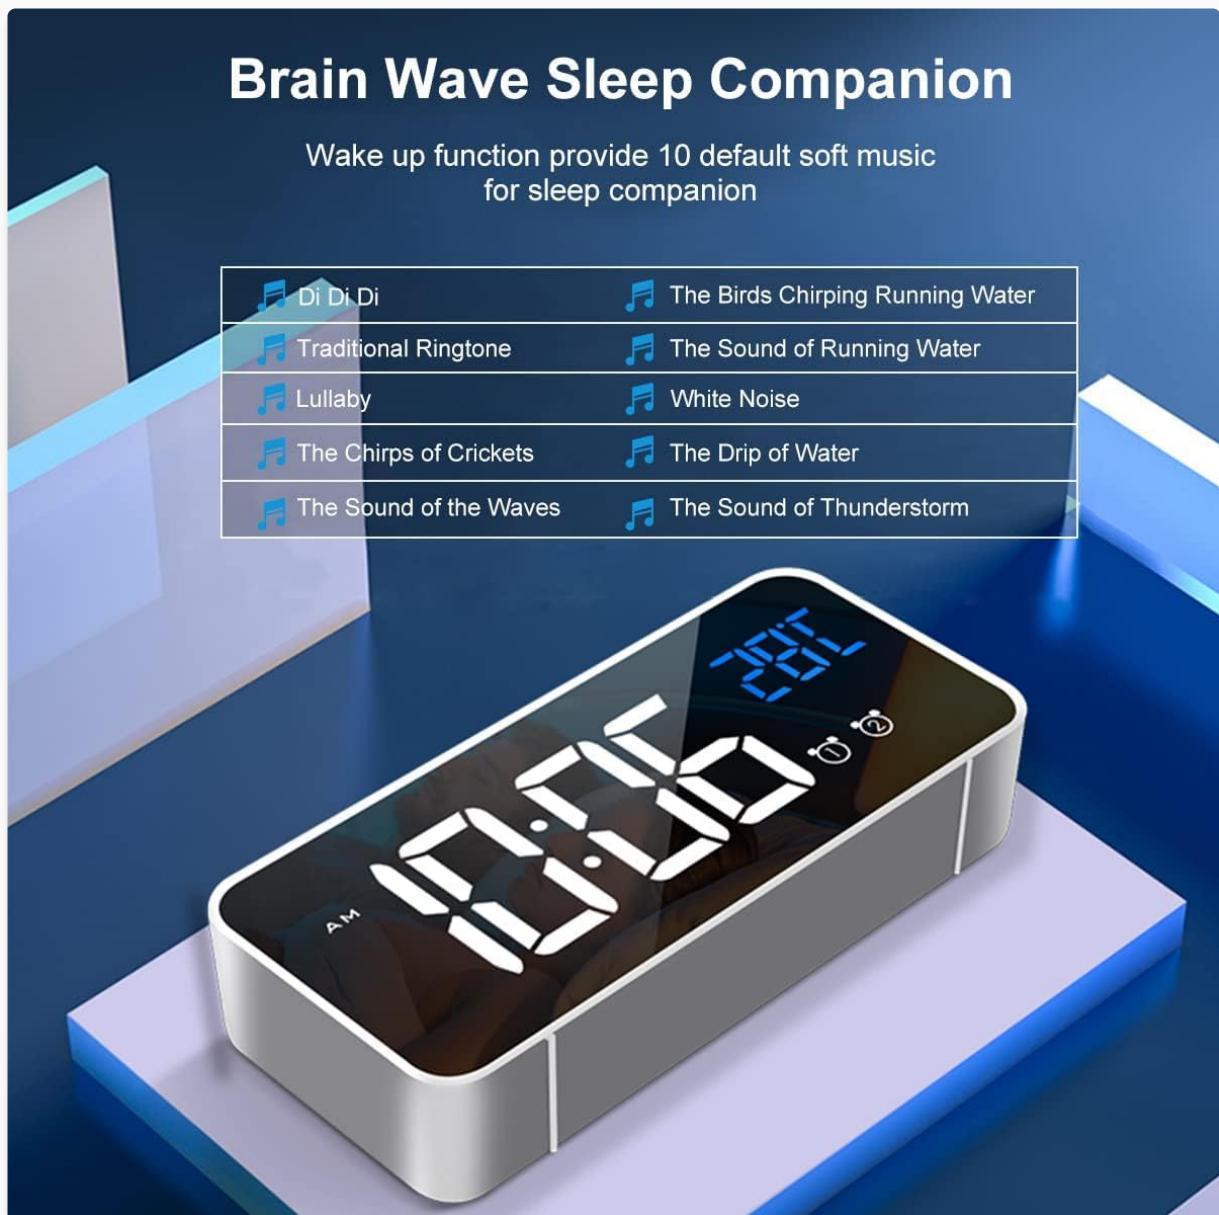
Setting Time (12/24 Hour Format)

- Press the 'TIME SET' button to enter time setting mode.
- Use the 'UP' and 'DOWN' buttons to adjust hours and minutes.
- Press 'TIME SET' again to confirm and move to the next setting.
- To switch between 12-hour and 24-hour format, press the '12/24 HRS' button on the back.

Setting Alarms (Alarm 1 & Alarm 2)

- Press the 'ALARM SET' button to enter alarm setting mode.
- Use 'UP' and 'DOWN' to set the desired alarm time for Alarm 1.
- Press 'ALARM SET' to confirm and proceed to melody selection.
- Use 'UP' and 'DOWN' to cycle through the 10 available alarm melodies.

- Repeat the process for Alarm 2.
- To activate/deactivate an alarm, use the 'ALARM 1 ON/OFF' or 'ALARM 2 ON/OFF' switches on the side of the clock.



The clock offers 10 distinct melodies for a personalized wake-up experience.

Adjusting Volume

- Press the 'VOLUME ADJUSTMENT' button on the back to cycle through the three volume levels.

Using Snooze Function

- When the alarm rings, gently press the 'SNOOZE/LIGHT' button on the top to activate the 5-minute snooze. The alarm icon will flicker.
- To turn off the alarm completely, press any other button on the clock's back panel.

Intelligent Voice Control Function

If the ambient noise reach 90 decibel or slightly knock the desktop which the alarm clock is placed on can awaken the clock display and will be off after 6 seconds.



Visual representation of the snooze function and brightness levels.

Voice Activation (Battery Mode Only)

- When the clock is running on battery power, make a sound (e.g., clap, tap the table) to illuminate the display. The display will turn off automatically after 6 seconds.
- Note: This function is disabled when the clock is connected via USB power.



The clock's display can be activated by sound when running on battery.

Adjusting Brightness

- If powered by USB, the clock automatically adjusts display brightness at different times of the day.
- You can manually adjust the brightness by pressing the 'SNOOZE/LIGHT' button on the top to cycle through the four brightness levels.

Maintenance

- **Cleaning:** Use a soft, dry cloth to clean the display and casing. Avoid abrasive cleaners or solvents.
- **Battery Care:** To prolong battery life, ensure the clock is fully charged when primarily using battery mode. If storing for an extended period, charge the battery periodically.
- **Placement:** Place the clock on a stable, flat surface away from direct sunlight, extreme temperatures, and high humidity.

Troubleshooting

| Problem | Possible Cause | Solution |
|---------|----------------|----------|
| | | |

| Problem | Possible Cause | Solution |
|--|--|---|
| Display is off or dim in battery mode. | Battery saving mode activated; low battery. | Make a sound to activate display. Recharge the clock using the USB cable. |
| Temperature reading seems inaccurate. | Clock recently moved or unpacked. | Leave the clock stationary for at least 30 minutes for accurate readings. |
| Alarm not sounding. | Alarm not activated; volume too low. | Ensure the alarm ON/OFF switch is in the 'ON' position. Adjust alarm volume. |
| Clock not charging. | Incorrect adapter; faulty cable. | Use a 5V/1A or 5V/2A USB adapter. Try a different USB cable. |
| Voice control not working. | Clock is connected via USB; ambient noise too low. | Voice control only works in battery mode. Ensure ambient noise reaches 90dB or tap the surface the clock is on. |




Specifications

- Brand:** HOMVILLA
- Model Number:** jhjswe-5958
- Color:** Silver
- Product Dimensions (L x W x H):** 14.5 x 3.81 x 3 cm (5.7 x 1.5 x 1.2 inches)
- Item Weight:** 158 grams
- Material:** Plastic
- Display Type:** Digital LED
- Power Source:** Corded Electric (USB) / Battery (1 Lithium Polymer battery included)
- Special Features:** Alarm, Temperature Display, Voice Activation, Snooze, Adjustable Brightness, Adjustable Volume

Warranty and Support

For warranty information and customer support, please refer to the documentation provided with your purchase or contact the seller directly. Keep your purchase receipt for any warranty claims.

For further assistance or inquiries, please visit the HOMVILLA official website or contact their customer service department.

| | |
|---|--|
|  <p>HOMVILLA LED Alarm Clock User Guide Please Read & Completely Before Use Service Email: support@homvilla.com</p> | <p>HOMVILLA LED Alarm Clock User Guide - Setup and Features</p> <p>Comprehensive user guide for the HOMVILLA LED Alarm Clock (Model 8808). Learn how to set time, alarms, adjust brightness, use snooze, and understand power modes. Includes troubleshooting and maintenance tips.</p> |
|  <p>Rechargeable LED Digital Alarm Clock User Guide</p> | <p>Rechargeable LED Digital Alarm Clock User Guide</p> <p>User guide for the Rechargeable LED Digital Alarm Clock, detailing setup, alarm functions, and maintenance.</p> |
|  <p>PRODUCT DATA Piezoelectric Accelerometer DeltaTron® Accelerometer – Type 5958-A</p> | <p>Brüel & Kjær DeltaTron 5958-A Piezoelectric Accelerometer Product Data</p> <p>Detailed product data for the Brüel & Kjær DeltaTron 5958-A piezoelectric accelerometer, designed for rugged vibration measurements in demanding wet, submerged, and harsh environments.</p> |
|  <p>QUICKSTART EXTEND WATER TANK PLACE TANK AND FILL INSERT VAPOR PAD SET</p> | <p>Halls Collapsible Humidifier EE-5958CWH User Manual & Instructions</p> <p>Official user manual and quick start guide for the Halls Collapsible Cool Mist Humidifier, Model EE-5958CWH. Includes setup, operation, maintenance, troubleshooting, and warranty information from Crane USA.</p> |