

VONLUCE HCF-15M6-GD

VONLUCE 8.3-inch Industrial Semi Flush Mount Ceiling Light (Model HCF-15M6-GD) User Manual

Model: HCF-15M6-GD

1. INTRODUCTION

This manual provides detailed instructions for the safe installation, operation, and maintenance of your VONLUCE 8.3-inch Industrial Semi Flush Mount Ceiling Light. Please read this manual thoroughly before installation and retain it for future reference.



Image 1: VONLUCE 8.3-inch Industrial Semi Flush Mount Ceiling Light with clear glass shade and gold finish.

2. SAFETY INFORMATION

WARNING: To avoid electric shock, always turn off the power at the main circuit breaker or fuse box before beginning installation or performing any maintenance. Do not attempt installation if you are not familiar with electrical wiring. Consult a qualified electrician.

- Ensure all electrical connections comply with local codes and ordinances.
- Use only the specified bulb type and wattage to prevent overheating.
- Do not install the fixture on a wet surface or near water.
- Handle glass components with care to prevent breakage.

3. PACKAGE CONTENTS

Verify that all components are present and undamaged before installation. If any parts are missing or broken, contact customer support.

- Mounting Canopy with Socket
- Clear Glass Shade
- Mounting Hardware (screws, wire nuts)



Image 2: Exploded view showing the mounting canopy, socket, and clear glass shade.

4. SPECIFICATIONS

| Feature | Specification |
|--------------------|-----------------------|
| Brand | VONLUCE |
| Model Number | HCF-15M6-GD |
| Color | Gold |
| Material | Glass, Metal |
| Product Dimensions | 8.3"L x 8.3"W x 6.7"H |
| Installation Type | Semi Flush Mount |
| Bulb Base | E26 |

| | |
|----------------------|--|
| Max Wattage | 60 watts |
| Light Source Type | LED, Incandescent, CFL (Bulb not included) |
| Dimmer Compatible | Yes (with compatible bulb and dimmer switch, not included) |
| Indoor/Outdoor Usage | Indoor |



Image 3: Product dimensions showing 8.3 inches width and 6.7 inches height.

5. INSTALLATION INSTRUCTIONS

Follow these steps carefully for proper installation. It is recommended to watch the installation video for visual guidance.

Installation Video Guide:

Your browser does not support the video tag.

Video 1: Step-by-step guide on how to install the VONLUCE Semi Flush Mount Ceiling Light.

Step-by-Step Guide:

- 1. Preparation:** Turn off power at the circuit breaker. Ensure the mounting surface is clean and dry.

2. **Disassemble Fixture:** Carefully remove the decorative nuts and separate the mounting canopy from the fixture body. Remove the glass shade.
3. **Install Mounting Bracket:** Secure the mounting bracket to the junction box in your ceiling using the provided screws. Ensure it is firmly attached.
4. **Wiring:** Connect the fixture's wires to your household electrical wires. Connect the live (black) wire to the live wire, the neutral (white) wire to the neutral wire, and the ground wire to the ground wire. Secure connections with wire nuts.
5. **Attach Fixture Body:** Carefully push the wired fixture body up to the mounting bracket, aligning the screw holes. Secure the fixture body to the mounting bracket using the previously removed decorative nuts.
6. **Install Glass Shade:** Place the clear glass shade over the socket and secure it with the retaining ring or screws, depending on the design.
7. **Install Bulb:** Screw an E26 base bulb (not included) into the socket. Do not exceed the maximum wattage of 60W.
8. **Restore Power:** Turn the power back on at the circuit breaker and test the light fixture.

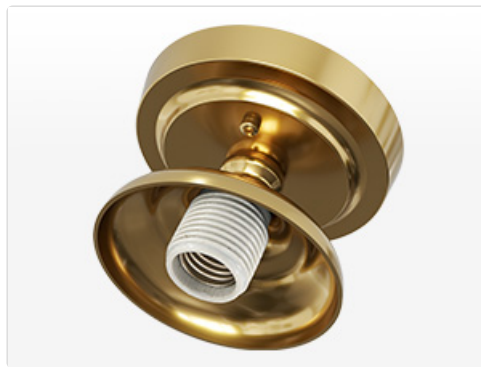


Image 4: Close-up view of the ceramic E26 bulb socket.

6. OPERATING INSTRUCTIONS

Once installed, operate the light fixture using your standard wall switch. This fixture is compatible with E26 base bulbs up to 60W. For dimming functionality, use a dimmable E26 bulb and a compatible dimmer switch (both sold separately).



Image 5: Various E26 base bulb types compatible with the fixture.

7. MAINTENANCE

- **Cleaning:** To clean the fixture, ensure the power is off. Wipe the metal parts with a soft, dry cloth. The glass shade can be removed and washed with mild soap and water, then dried thoroughly before reinstallation. Do not use abrasive cleaners or solvents.
- **Bulb Replacement:** Turn off the power before replacing the bulb. Allow the old bulb to cool completely. Unscrew the old bulb and screw in a new E26 base bulb, ensuring it does not exceed 60W.

8. TROUBLESHOOTING

| Problem | Possible Cause | Solution |
|------------------------|--|--|
| Light does not turn on | 1. Power is off 2. Loose wiring 3. Faulty bulb | 1. Check circuit breaker/wall switch 2. Turn off power, check wiring connections 3. Replace bulb |

| | | |
|----------------------|---|---|
| Light flickers | 1. Loose bulb 2. Incorrect bulb type for dimmer 3. Loose wiring | 1. Tighten bulb 2. Ensure dimmable bulb is used with dimmer 3. Turn off power, check wiring connections |
| Glass shade is loose | Retaining ring/screws not tightened | Carefully tighten the retaining ring or screws securing the shade. |

9. WARRANTY AND SUPPORT

For warranty information or technical support, please contact VONLUCE customer service. Keep your purchase receipt for proof of purchase.

Contact Information: Refer to your product packaging or the official VONLUCE website for the most current customer support details.