

[Manuals+](#)

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [mooas](#) /

› [mooas Qi Wireless Charging Slim Mirror Desk Clock User Manual](#)

**mooas Qi Wireless Charging Slim Mirror Desk Clock**

# **mooas Qi Wireless Charging Slim Mirror Desk Clock User Manual**

Model: Qi Wireless Charging Slim Mirror Desk Clock

## **INTRODUCTION**

---



Figure 1: The mooas Qi Wireless Charging Slim Mirror Desk Clock.

Thank you for purchasing the mooas Qi Wireless Charging Slim Mirror Desk Clock. This compact digital alarm clock combines time display, dual alarm functions, and both wireless and wired charging capabilities in a sleek, mirror-finished design. Please read this manual carefully to ensure proper use and optimal performance of your device.

## PRODUCT FEATURES

- Qi Wireless Charging:** Simply place your compatible smartphone on top of the clock for automatic wireless charging.
- Wired & Simultaneous Charging:** Features a USB port for wired charging, allowing simultaneous wireless and wired charging with a 5V 2A adapter.
- Dual Alarm with Snooze:** Set up to two independent alarms. Press the SNOOZE button for a five-minute delay.
- Time Memorizing Function:** Equipped with a coin battery to retain time settings even if the power adapter is disconnected.
- Mirror Display:** The front surface acts as a reflective mirror, blending seamlessly with your decor.

## Mirror Clock



Figure 2: The clock's mirror display function.



Figure 3: The mooas clock available in Charcoal Gray and White.

## PACKAGE CONTENTS

Please check that all items are present:

- mooas Qi Wireless Charging Slim Mirror Desk Clock
- USB Power Cable (Type-C input)
- User Manual

*Note: A 5V 2A power adapter is required for optimal charging performance and is not included.*

## SETUP

1. **Power Connection:** Connect the provided USB cable to the Type-C input port on the back of the clock. Plug the other end into a 5V 2A USB power adapter (not included) and then into a wall outlet. The clock display will light up.

2. **Initial Time Setting:** Upon first power-up, the time may need to be set. Refer to the "Operating Instructions" section for detailed steps on setting the time and 12/24H mode.

## Buttons

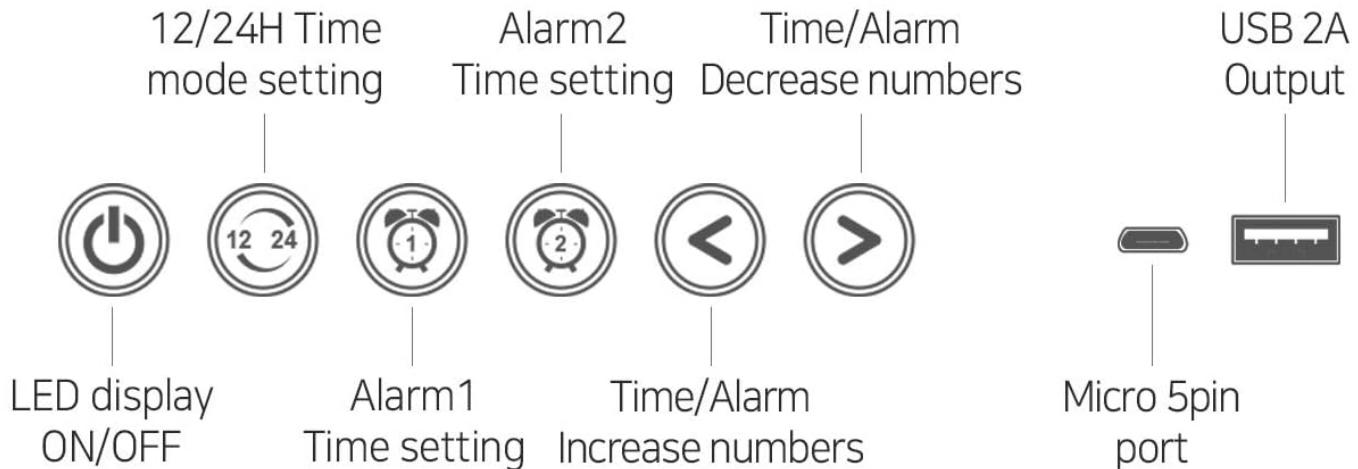


Figure 4: Rear view of the clock with labeled buttons and ports. From left to right: LED display ON/OFF, 12/24H Time mode setting, Alarm 1 setting, Alarm 2 setting, Time/Alarm Increase numbers, Time/Alarm Decrease numbers, Micro 5pin port (Type-C input), USB 2A Output.

## OPERATING INSTRUCTIONS

### Time Setting (12/24H Mode)

1. Press the "12/24H Time mode setting" button (second from left) to toggle between 12-hour and 24-hour time formats.
2. To set the time, press and hold the "12/24H Time mode setting" button until the hour digits flash.
3. Use the "Time/Alarm Increase numbers" (right arrow) and "Time/Alarm Decrease numbers" (left arrow) buttons to adjust the hour.
4. Press the "12/24H Time mode setting" button again to move to minute adjustment. Adjust minutes using the arrow

buttons.

5. Press the "12/24H Time mode setting" button one more time to confirm and exit time setting mode.

## Alarm Setting (Dual Alarms & Snooze)

The clock supports two independent alarms (Alarm 1 and Alarm 2).

1. **To Set Alarm 1:** Press and hold the "Alarm 1 Time setting" button (third from left) until the hour digits flash. Adjust the hour using the arrow buttons. Press the "Alarm 1 Time setting" button again to adjust minutes. Press again to confirm.
2. **To Set Alarm 2:** Follow the same procedure using the "Alarm 2 Time setting" button (fourth from left).
3. **To Activate/Deactivate Alarm:** Briefly press the respective Alarm 1 or Alarm 2 button to turn the alarm ON or OFF. An alarm icon will appear on the display when active.
4. **Snooze Function:** When an alarm sounds, press the "SNOOZE" button (located on top of the clock) to temporarily silence the alarm for five minutes.
5. **Stop Alarm:** To stop an alarm completely, press any button on the back of the clock other than the "SNOOZE" button.

## Dual Alarm/Snooze



Figure 5: The clock display showing active dual alarms and the location of the Snooze button.

## LED Display ON/OFF

To turn the LED display ON or OFF, briefly press the "LED display ON/OFF" button (far left on the back of the clock).

## Wireless Charging

Place your Qi-compatible device (e.g., smartphone, AirPods) on the designated wireless charging area on top of the clock. Charging will begin automatically. Ensure the device is centered on the charging pad for optimal performance.



Figure 6: A smartphone being wirelessly charged on the clock.



Figure 7: AirPods and their case placed on the wireless charging area.

### **Wired Charging (USB Port)**

The clock features a 2A USB output port on the back. Connect your device's charging cable to this port to charge it. Both wireless and wired charging can occur simultaneously.

## Wired/Simultaneous Charging



Figure 8: Simultaneous wireless and wired charging of two smartphones.

You can also connect small appliances powered by USB.



Figure 9: The USB output port can also power small USB-powered appliances.

## MAINTENANCE

- Clean the clock's surface with a soft, dry cloth. Avoid using abrasive cleaners or solvents.
- Keep the device away from water and high humidity.
- Do not expose the clock to direct sunlight or extreme temperatures.

## TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Device not wirelessly charging.	Device not Qi-compatible. Device not properly aligned on the charging pad. Phone case is metal or too thick. Foreign objects between device and charger.	Verify device supports Qi wireless charging. Adjust device position to be centered on the charging pad. Remove phone case before charging. Ensure no objects are obstructing the charging area.
Clock display is off.	LED display turned off. Power adapter disconnected.	Press the "LED display ON/OFF" button. Check power cable connection and adapter.
Alarm not sounding.	Alarm not activated. Alarm volume too low (if adjustable, not specified in data).	Ensure the alarm icon is visible on the display. Refer to the "Alarm Setting" section to activate.

## SPECIFICATIONS

Feature	Detail
Brand	mooas
Model	Qi Wireless Charging Slim Mirror Desk Clock
Color	Charcoal Gray (This manual refers to the Charcoal Gray model, other colors may be available)
Display Type	Digital
Product Dimensions	6.61"W x 1.81"H
Power Source	Battery Powered (for memory), Corded Electric (for operation and charging)
Material	Acrylonitrile Butadiene Styrene, Metal
Item Weight	6.4 ounces
Connectivity Technology	USB
Batteries	1 LR44 battery required (for time memorizing, not included)

## OFFICIAL PRODUCT VIDEO

Your browser does not support the video tag.

Video 1: An overview of the mooas Qi Wireless Charging Slim Mirror Desk Clock, demonstrating its features including wireless charging, dual alarms, and design in both Charcoal Gray and White colors.

## WARRANTY AND SUPPORT

For warranty information or technical support, please refer to the product packaging or contact mooas customer service directly. Contact details are typically provided on the manufacturer's official website or within the product's retail packaging.



