
GODOX SL60W

GODOX SL60W LED Video Light Kit Instruction Manual

1. Product Overview

The GODOX SL60W LED Video Light Kit provides powerful and stable continuous lighting for various photography and videography needs. This kit includes two 60W LED lights, softboxes, light stands, and a remote control, offering versatile lighting solutions for professional video recording, studio photography, live streaming, weddings, and outdoor shoots.

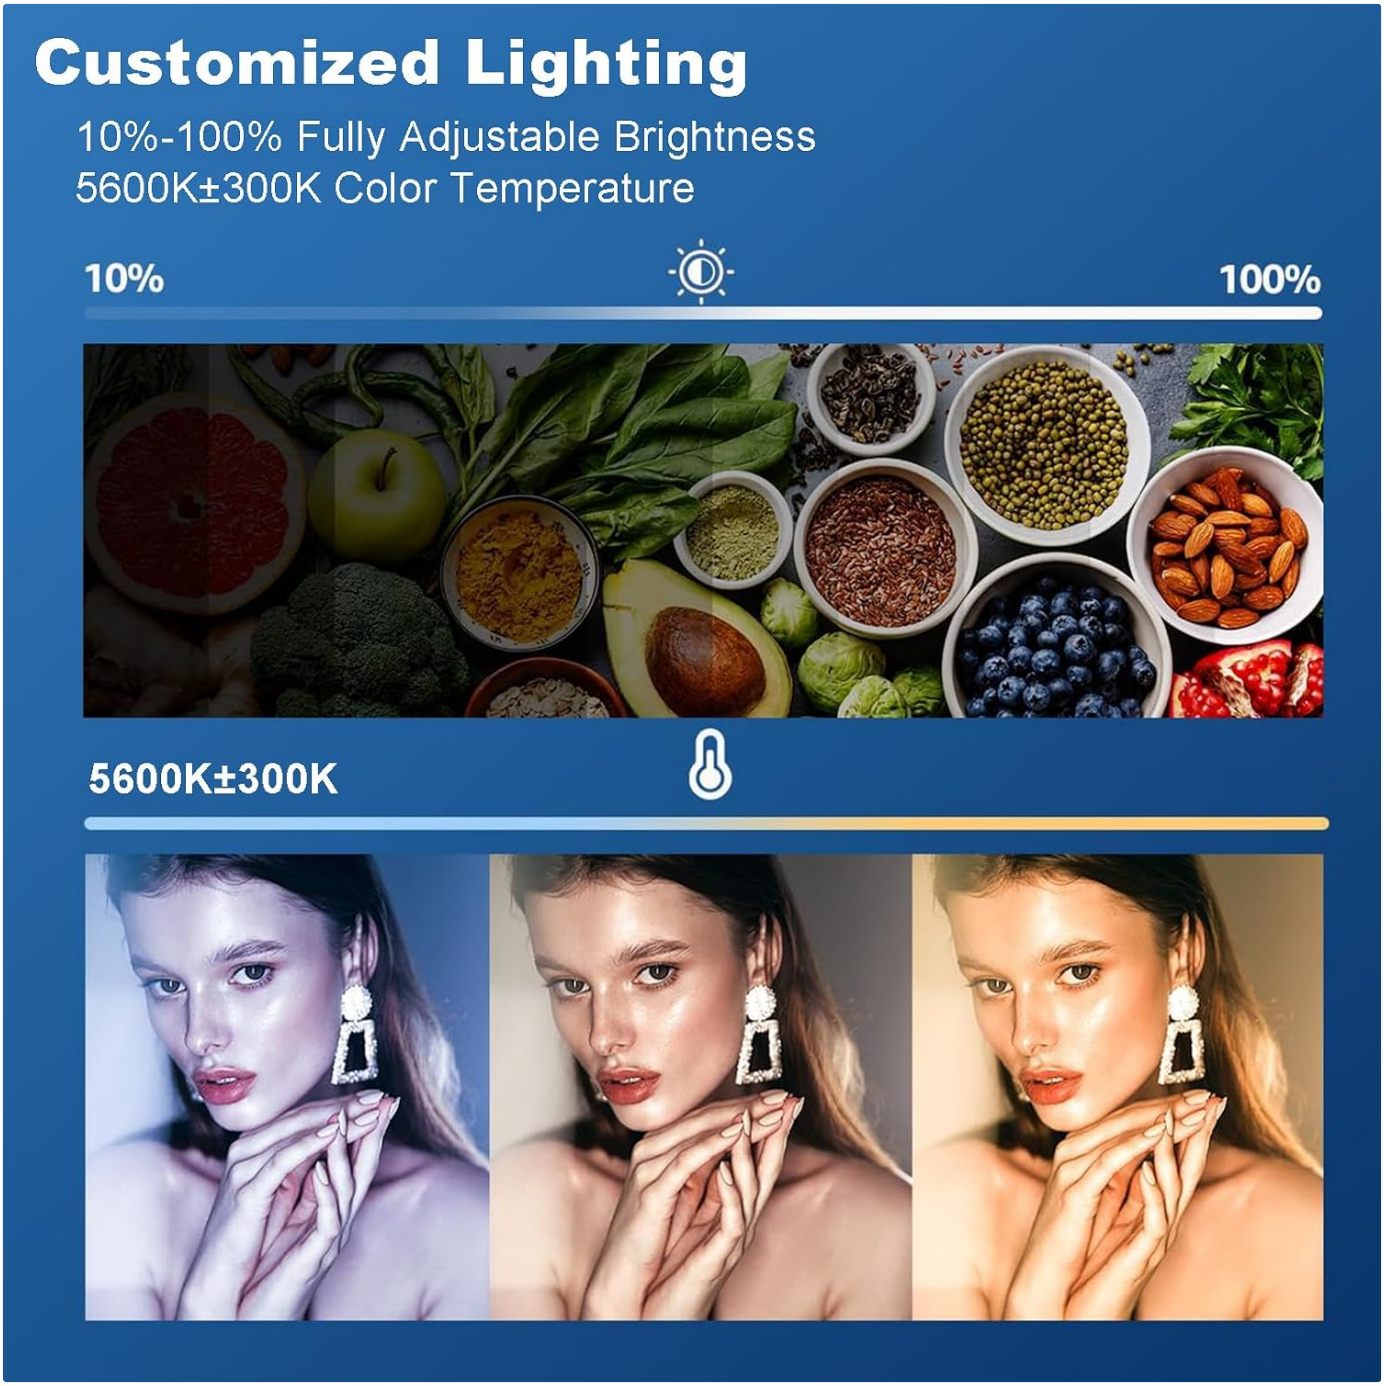

The SL60W features a 60W high-power LED bead, adjustable brightness from 10% to 100%, and a stable 5600K±300K color temperature. With a Color Rendering Index (CRI) of over 95 and TLCI over 90, it ensures accurate color reproduction. The Bowens mount design allows compatibility with a wide range of accessories, expanding creative lighting possibilities.



The light is designed for quiet operation with an excellent heat dissipation fan, ensuring stability during long shooting sessions. Its portable and easy-to-set-up design makes it suitable for both studio and on-location use.

2. Package Contents

Verify that all items are included in your GODOX SL60W LED Video Light Kit:

- 2x GODOX SL60W LED Video Light
- 2x 60x90cm Bowens Mount Softbox
- 2x Light Stand
- 1x RC-A5 Remote Control
- 2x Standard Reflector
- 2x Clean Cloth
- 2x Power Supply Cord
- 2x Lamp Cover



The image above illustrates the approximate dimensions of the main components for reference.

3. Setup Instructions

3.1 Assembling the Light Stand and Softbox

1. Extend the light stand to the desired height and secure all locking mechanisms.
2. Mount the GODOX SL60W LED video light onto the top of the light stand, ensuring it is securely fastened.
3. Attach the Bowens mount softbox to the front of the SL60W light. Align the softbox rods with the light's mounting points and rotate to lock it in place.
4. If using the standard reflector, attach it to the Bowens mount by aligning and twisting until secure.



The Bowens mount allows for quick attachment and detachment of various light modifiers, as shown in the image above.

3.2 Connecting Power

Connect the power supply cord to the AC power socket on the back of the GODOX SL60W LED light and then plug it into a suitable power outlet.

Your browser does not support the video tag. This video demonstrates the physical features of the GODOX SL60W LED video light, including its high brightness LED beads, efficient heat dissipation system with a built-in fan, and the Bowens-style mount for attaching accessories like reflectors. It also shows the light being powered on and emitting light.

This video provides a visual guide to the physical components and initial setup of the GODOX SL60W, including attaching a reflector and powering on the unit.

4. Operating Instructions

4.1 Power On/Off

Locate the ON/OFF switch on the back panel of the light. Flip the switch to 'ON' to power on the device. Flip to 'OFF' to power it down.



The image above highlights the main controls on the rear panel of the light.

4.2 Adjusting Brightness

The brightness can be adjusted from 10% to 100% using two methods:

- **On the Light Unit:** Rotate the 'SET' knob on the back panel to increase or decrease the brightness.
- **Using the RC-A5 Remote Control:** Use the '+' and '-' buttons on the remote to adjust the LED output brightness.

Long-press the buttons for faster adjustment.



This image demonstrates the range of brightness adjustment available.

4.3 Adjusting Channel and Group

The GODOX SL60W supports a 433MHz wireless grouping system with 6 groups and 16 channels. This allows for controlling multiple lights simultaneously or individually.

- **On the Light Unit:** Press the 'CH/GRP' button on the back panel to switch between channel and group settings. Rotate the 'SET' knob to select the desired channel (1-16) or group (A-F). Press the 'SET' button to confirm your selection.
- **Using the RC-A5 Remote Control:** Press the 'CH/GRP' button on the remote. Use the '+' and '-' buttons to adjust the channel or group. Press the 'SET' button to confirm.

4.4 Using the Remote Control

The included RC-A5 remote control allows for wireless adjustment of light brightness, channel, and group settings within a 20-meter range. Ensure the remote's channel and group settings match those of the light unit you wish to control.



The remote control provides convenient wireless operation, as depicted in the image above.


Your browser does not support the video tag. This video demonstrates the operational controls of the GODOX SL60W LED video light, including turning on the power switch, rotating the knob to adjust brightness from 10% to 100%, and adjusting channels and groups using both the light's controls and the remote control.

This video provides a detailed demonstration of how to operate the GODOX SL60W, including power, brightness, and channel/group adjustments using both the light's panel and the remote control.

5. Features and Compatibility

5.1 Color Temperature and CRI

The SL60W provides a consistent 5600K±300K daylight-balanced color temperature, ideal for matching ambient light or other daylight-balanced fixtures. With a CRI (Color Rendering Index) greater than 95 and R9 value of 90, it ensures highly accurate color reproduction, making it suitable for professional applications where color fidelity is critical.

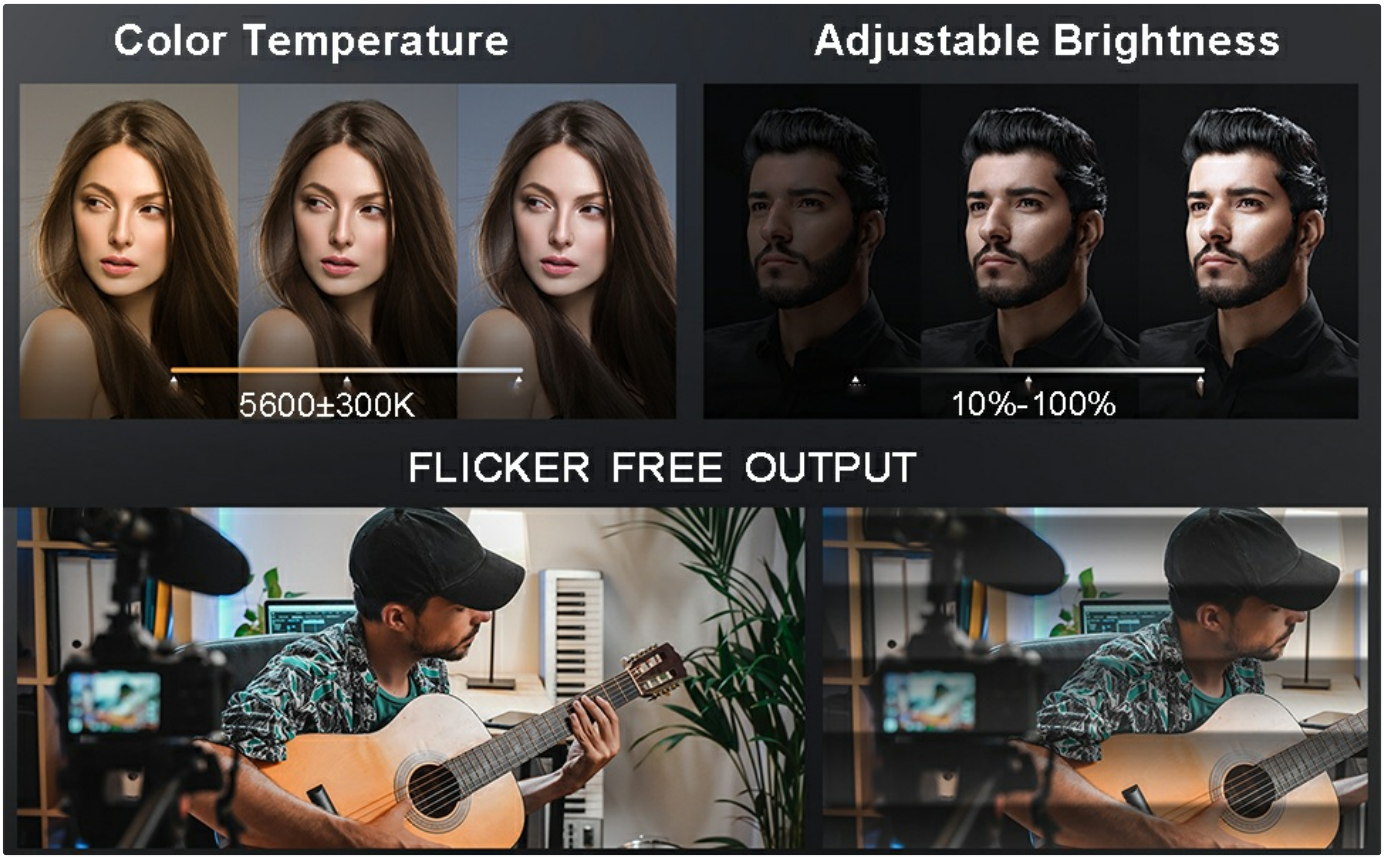

The image illustrates the significant difference in color accuracy achieved with a high CRI light source.



Key specifications for reliable color rendering are summarized in this graphic.

5.2 Bowens Mount System

The integrated Bowens mount offers broad compatibility with a wide array of light modifiers, including softboxes, barn doors, beauty dishes, honeycomb grids, and snoots. This allows users to shape and control the light output precisely for various creative effects.

5.3 Cooling System

The GODOX SL60W is equipped with a built-in fan and an excellent heat dissipation design to prevent overheating. This ensures stable performance and extends the lifespan of the LED light, even during prolonged use.



The image highlights the cooling system's design for efficient heat management.

6. Technical Specifications

Feature	Specification
Model Number	SL60W
Power Output	60W
Color Temperature	5600K ± 300K
Brightness Adjustment	10% - 100%
Illumination (1m)	4100 Lux (with standard reflector)
CRI (Color Rendering Index)	>95
R9	90
Wireless Control	433MHz, 6 Groups, 16 Channels
Mount Type	Bowens Mount
Item Weight	23.2 pounds (Kit)
Package Dimensions	30.3 x 15.1 x 8.7 inches
Manufacturer	GODOX
UPC	791296006424

7. Maintenance

Proper maintenance ensures the longevity and optimal performance of your GODOX SL60W LED Video Light Kit:

- **Cleaning:** Regularly clean the light unit, softboxes, and stands with a soft, dry cloth. For stubborn dirt, a slightly damp cloth can be used, followed by immediate drying. Do not use harsh chemicals or abrasive cleaners.

- **Storage:** When not in use, store the kit in a dry, dust-free environment, preferably in its original packaging or a dedicated carrying case. Ensure all components are cool before packing.
- **Cable Care:** Avoid bending or kinking power cords excessively. Always unplug by grasping the plug, not the cable.
- **Ventilation:** Ensure the light's ventilation openings are clear and unobstructed during operation to allow for proper heat dissipation.

8. Troubleshooting

If you encounter issues with your GODOX SL60W LED Video Light Kit, refer to the following common troubleshooting steps:

- **Light Not Turning On:**
  - Check if the power cord is securely connected to both the light and the power outlet.
  - Ensure the ON/OFF switch on the light's back panel is in the 'ON' position.
  - Verify the power outlet is functional by plugging in another device.
- **Brightness Not Adjusting:**
  - If using the remote control, ensure it has fresh batteries and is within the 20-meter operating range.
  - Check that the remote's channel and group settings match those of the light unit.
  - Try adjusting brightness directly using the 'SET' knob on the light unit.
- **Remote Control Not Responding:**
  - Replace the remote control batteries.
  - Ensure there are no obstructions between the remote and the light unit.
  - Re-sync the remote with the light by setting matching channels and groups.
- **Overheating Warning:**
  - Ensure the light's ventilation openings are not blocked.
  - Operate the light in a well-ventilated area.
  - Reduce the brightness setting if operating for extended periods in high ambient temperatures.

If these steps do not resolve the issue, please contact GODOX customer support for further assistance.

9. Warranty and Support

The GODOX SL60W LED Video Light Kit is covered by the manufacturer's warranty. Please refer to the warranty card included with your product or visit the official GODOX website for detailed warranty terms and conditions.

For technical support, service, or inquiries regarding your product, please contact GODOX customer service through their official channels. Keep your purchase receipt and product serial number handy when seeking support.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question