

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [Ancona](#) /

› [Ancona Wall Glass Canopy 30" Range Hood Instruction Manual \(Model CA0111-3005\)](#)

Ancona CA0111-3005

Ancona Wall Glass Canopy 30" Range Hood

Model: CA0111-3005

INTRODUCTION

This instruction manual provides essential information for the safe and efficient installation, operation, and maintenance of your Ancona Wall Glass Canopy 30" Range Hood, Model CA0111-3005. Please read this manual thoroughly before installation and use, and retain it for future reference.

SAFETY INFORMATION

To reduce the risk of fire, electric shock, or injury, observe the following:

- Installation work and electrical wiring must be done by qualified person(s) in accordance with all applicable codes and standards, including fire-rated construction.
- Sufficient air is needed for proper combustion and exhausting of gases through the flue (chimney) of fuel-burning equipment to prevent back-drafting. Follow the heating equipment manufacturer's guideline and safety standards such as those published by the National Fire Protection Association (NFPA), and the American Society for Heating, Refrigeration and Air Conditioning Engineers (ASHRAE), and the local code authorities.
- When cutting or drilling into wall or ceiling, do not damage electrical wiring and other hidden utilities.
- Ducted fans must always be vented to the outdoors.
- This unit must be grounded.
- Do not use this unit with any external solid-state speed control device.
- To reduce the risk of fire, use only metal ductwork.
- Always turn off power to the unit at the service panel before servicing.

PRODUCT OVERVIEW

The Ancona Wall Glass Canopy Range Hood is designed to provide efficient ventilation for your kitchen. It features durable stainless steel construction and a sleek glass canopy.



Ancona 30 inch Wall Mounted Glass Canopy Range Hood in Stainless Steel. This image shows the full range hood installed above a cooktop.


SETUP AND INSTALLATION

This range hood is designed for wall-mount installation and features top venting for external exhaust. It can be converted for internal recirculating use with a separately purchased conversion system.

Dimensions and Clearance

To reach 9 foot ceilings, hood needs to be installed at 32" above the cooking surface.

Pour atteindre les plafonds de 9 pieds, les hottes doivent être installées à 32" au-dessus de la surface de cuisson.

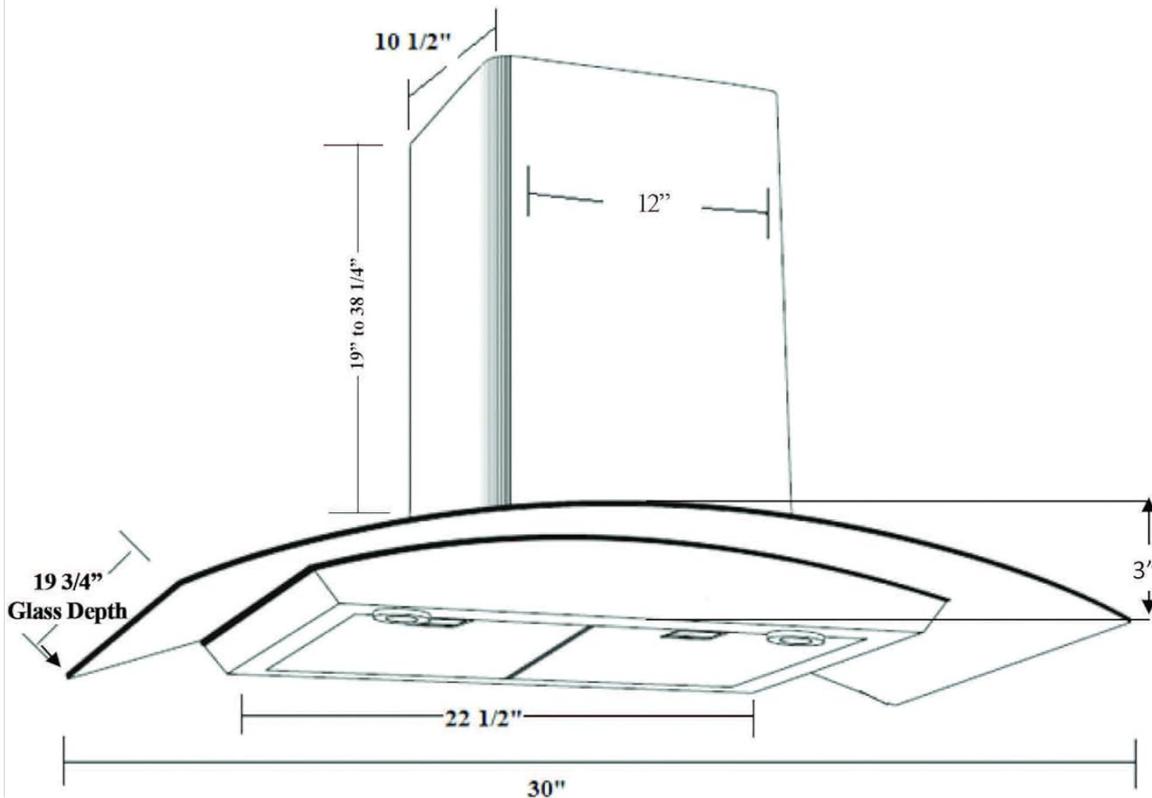

Dimension diagram for the Ancona CA0111-3005 range hood, showing overall width of 30 inches, glass depth of 19 3/4 inches, and chimney height range. For 9-foot ceilings, the hood should be installed 32 inches above the cooking surface.

The product dimensions are approximately 50.17 cm (depth) x 76.2 cm (width) x 104.78 cm (height). Ensure adequate clearance above your cooking surface. For 9-foot ceilings, the hood should be installed 32 inches above the cooking surface.

Included Components

- Main hood housing with glass canopy
- Chimney mounting brackets
- Hood bracket
- Upper and lower chimney sections
- Damper flap
- Aluminum filters
- Screws and washers for installation

OPERATING INSTRUCTIONS

The range hood features electronic button controls for fan speed and lighting.

Controls



Close-up of the electronic control panel, featuring buttons for adjusting the 3-speed fan and activating the timed shutdown function, along with the light control button.

- **Fan Speed:** Use the electronic controls to select one of the 3 available fan speeds. The powerful 450 CFM motor efficiently removes cooking odors and smoke.
- **Timed Shutdown:** Activate the timed shutdown feature for automatic fan turn-off after a set period.
- **Lighting:** The hood is equipped with 2 x 20-watt halogen lamps to illuminate your cooking surface. Use the light button to turn them on or off.




A close-up view of one of the two discreetly inset halogen lights, providing clear illumination for the cooking area.

MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your range hood.

Cleaning the Filters

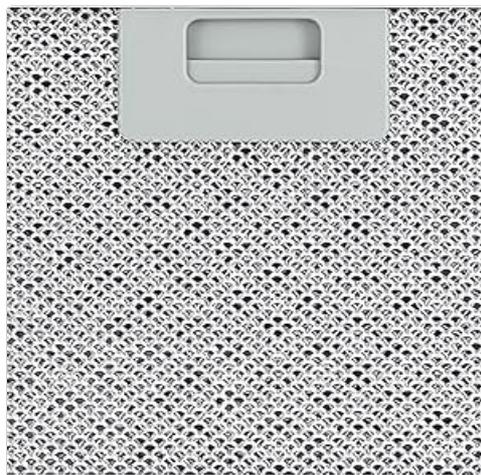

A detailed view of the aluminum mesh filters, designed to capture grease and particles from cooking fumes.

The range hood is equipped with 5-ply aluminum mesh filters. These filters should be cleaned regularly to maintain

airflow and filtration efficiency. They can typically be washed by hand with warm, soapy water or placed in a dishwasher.

Exterior Cleaning

Clean the stainless steel and glass surfaces with a non-abrasive cleaner and a soft cloth. Avoid harsh chemicals or abrasive pads that could scratch the finish.

TROUBLESHOOTING

If you experience issues with your range hood, refer to the following common troubleshooting steps:

- **No Power:** Check the circuit breaker or fuse box. Ensure the unit is properly plugged in.
- **Poor Suction:** Verify that the filters are clean and not obstructed. Check for any blockages in the ductwork. Ensure the damper flap opens freely.
- **Lights Not Working:** Check if the halogen bulbs are securely seated or need replacement.
- **Excessive Noise:** Ensure the unit is securely mounted. Check for loose parts or obstructions in the fan blades.

For persistent issues, contact customer support.

SPECIFICATIONS

Feature	Specification
Model Number	CA0111-3005
Vent Hood Design	Wall Mounted Canopy Hood
Air Flow Capacity	450 CFM
Number of Speeds	3
Motor Type	Independently tested, cETLus approved
Control Type	Electronic with Timed Shutdown
Lighting	2 x 20-watt Halogen Lamps (G4 bulbs included)
Filter Type	5-ply Aluminum Mesh
Material	430 Stainless Steel, Tempered Glass
Venting Type	Top Venting (Round 6 in.), External Exhaust (Convertible to Ductless with kit)
Voltage	120 Volts
Amperage	2.3 Amps
Wattage	250 Watts
Noise Level	54 Decibels
Product Dimensions (D x W x H)	50.17 x 76.2 x 104.78 cm (19.75 x 30 x 41.25 inches)

Item Weight	18.1 kg (39.9 lbs)
UPC	676195001940

PRODUCT VIDEO

This video provides a visual overview of the Ancona CA0111-3005 Wall Glass Canopy Range Hood, highlighting its stainless steel construction, electronic controls, and powerful 450 CFM motor. It also illustrates the ducted ventilation system, which is convertible to ductless operation.

WARRANTY AND SUPPORT

This product is subject to a return policy allowing for refunds or replacements within 30 days. For defective, damaged, or incorrect products, return shipping costs will be covered by the seller. For other reasons (e.g., change of mind, client error), the customer is responsible for return shipping costs.

For further assistance or warranty claims, please refer to the contact information provided with your purchase or visit the official Ancona website.