#### Manuals+

#### Q & A | Deep Search | Upload

#### manuals.plus /

- Aiwa /
- > Aiwa AWS200BT Portable Bluetooth Speaker Instruction Manual

#### Aiwa AWS200BT

# Aiwa AWS200BT Portable Bluetooth Speaker Instruction Manual

Model: AWS200BT | Brand: Aiwa

#### 1. Introduction

Thank you for purchasing the Aiwa AWS200BT Portable Bluetooth Speaker. This manual provides essential information for the safe and efficient operation of your device. Please read it thoroughly before use and retain it for future reference.

# 2. SAFETY INFORMATION

- Do not expose the speaker to extreme temperatures or direct sunlight for prolonged periods.
- Avoid dropping or subjecting the speaker to strong impacts.
- Keep the speaker away from medical devices.
- Do not attempt to disassemble or modify the speaker. This will void the warranty.
- Ensure all ports are securely closed when using the speaker near water to maintain its IPX5 water resistance.
- · Use only the specified charging cable and adapter.

# 3. PACKAGE CONTENTS

- Aiwa AWS200BT Portable Bluetooth Speaker
- USB Charging Cable
- User Manual

#### 4. PRODUCT OVERVIEW

Familiarize yourself with the various parts and controls of your Aiwa AWS200BT speaker.



Figure 4.1: Front view of the Aiwa AWS200BT speaker, showcasing the dual speaker grilles and illuminated RGB rings.



Figure 4.2: Angled view of the speaker, highlighting the integrated carrying handle and top-mounted control panel.



Figure 4.3: Top view of the speaker, detailing the control buttons for power, volume, playback, and mode selection.

#### **Control Buttons:**

- Power Button: Press and hold to turn on/off.
- Volume Up (+): Increase volume.
- Volume Down (-): Decrease volume.
- Play/Pause Button: Play or pause audio.
- Mode Button (M): Switch between Bluetooth, FM Radio, USB, and AUX modes.
- RGB Light Button: Cycle through RGB lighting modes.
- Previous Track/FM Scan Down: Short press for previous track, long press for FM scan down.
- Next Track/FM Scan Up: Short press for next track, long press for FM scan up.

# Ports:



Figure 4.4: Rear view of the speaker, indicating the USB, DC 5V charging, and AUX input ports, protected by a cover.

- USB Port: For USB drive playback.
- DC 5V Port: For charging the speaker.
- AUX Input: For connecting external audio devices via a 3.5mm audio cable.

# 5. SETUP

# 5.1 Initial Charging

- 1. Before first use, fully charge the speaker.
- 2. Connect the provided USB charging cable to the DC 5V port on the speaker.
- 3. Connect the other end of the USB cable to a compatible USB power adapter (not included) or a computer's USB port.
- 4. The charging indicator light will illuminate. Once fully charged (approximately 4 hours), the light may change color or turn off.

#### 5.2 Power On/Off

- To power on, press and hold the Power Button until you hear an audible prompt and the RGB lights illuminate.
- To power off, press and hold the Power Button again until you hear an audible prompt and the lights turn off.

# 6. OPERATING INSTRUCTIONS

#### 6.1 Bluetooth Pairing

- 1. Turn on the speaker. It will automatically enter Bluetooth pairing mode, indicated by a flashing LED light.
- 2. Enable Bluetooth on your smartphone or other device.
- 3. Search for "AWS200BT" in the list of available Bluetooth devices.

- 4. Select "AWS200BT" to connect. Once connected, you will hear a confirmation sound, and the LED light will stop flashing.
- 5. You can now play audio from your device through the speaker.

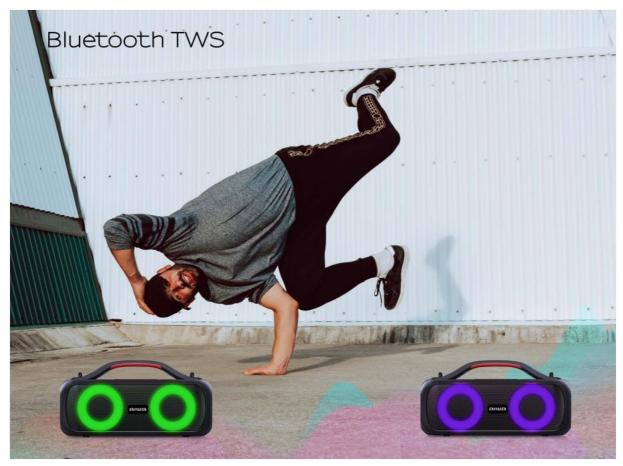


Figure 6.1: The Aiwa AWS200BT speaker highlighting its Bluetooth and TWS capabilities.

# 6.2 TWS (True Wireless Stereo) Function

The TWS function allows you to connect two AWS200BT speakers for a stereo sound experience.

- 1. Ensure both AWS200BT speakers are powered on and not connected to any Bluetooth device.
- 2. On one of the speakers (this will be the primary speaker), press and hold the TWS button (often integrated with the Play/Pause button or a dedicated button, refer to Figure 4.3 for specific button layout if available).
- 3. The primary speaker will search for the secondary speaker. Once connected, you will hear a confirmation sound.
- 4. Now, connect your device to the primary speaker via Bluetooth as described in Section 6.1. Audio will play through both speakers in stereo.

#### 6.3 FM Radio

- 1. Press the Mode Button (M) to switch to FM Radio mode.
- 2. To automatically scan and save available stations, press and hold the Play/Pause button. The speaker will scan and store stations.
- 3. Use the Previous Track and Next Track buttons to navigate between saved stations.

# 6.4 USB/AUX Input

• **USB Playback:** Insert a USB flash drive into the USB port. The speaker will automatically switch to USB mode and begin playing audio files.

• AUX Input: Connect a 3.5mm audio cable from your external device to the AUX port on the speaker. Press the Mode Button (M) to switch to AUX mode.

# 6.5 Voice Assistant & Hands-free Calling

- When connected via Bluetooth, the speaker supports voice assistants like Google Assistant and Siri.

  Press the dedicated Voice Assistant button (if available, or a long press on Play/Pause) to activate.
- For hands-free calling, when a call comes in, press the Play/Pause button to answer. Press again to end the call.

# **6.6 RGB Lighting Modes**

The speaker features multiple RGB lighting modes that synchronize with your music.

- Press the RGB Light Button to cycle through the available lighting effects.
- Continue pressing to find your preferred mode or to turn the lights off.



Figure 6.2: The Aiwa AWS200BT speaker showcasing its dynamic RGB lighting feature.

#### 7. MAINTENANCE

- Cleaning: Use a soft, dry cloth to clean the speaker's exterior. Do not use abrasive cleaners or solvents.
- Water Resistance: Ensure the port cover is always securely closed to maintain IPX5 water resistance. Do not submerge the speaker.
- **Storage:** Store the speaker in a cool, dry place away from direct sunlight and extreme temperatures when not in use for extended periods.
- **Battery:** To prolong battery life, charge the speaker regularly, even if not in frequent use. Avoid fully discharging the battery for long periods.

# 8. TROUBLESHOOTING

Problem	Possible Cause	Solution
Speaker does not turn on.	Low battery.	Charge the speaker fully.
Cannot pair via Bluetooth.	Speaker not in pairing mode; device Bluetooth off; too far from speaker.	Ensure speaker is in pairing mode (flashing LED). Turn on Bluetooth on your device. Move device closer to speaker (within 10 meters).
No sound.	Volume too low; incorrect mode selected; device not playing.	Increase speaker and device volume. Press 'M' button to select correct input mode (Bluetooth, USB, AUX, FM). Ensure audio is playing on your connected device.
FM radio reception is poor.	Weak signal.	Move the speaker to a location with better reception.

Problem	Possible Cause	Solution
TWS pairing fails.	Speakers already paired to another device; speakers too far apart.	Disconnect both speakers from any Bluetooth devices. Ensure they are close to each other. Try pairing again.

# 9. SPECIFICATIONS

Feature	Detail
Model Name	AWS200BT
Brand	Aiwa
Connectivity Technology	Bluetooth
Speaker Type	Tweeter
Maximum Speaker Output Power	30 Watts
Frequency Response	20 KHz
Sound Channel Configuration	2.0
Special Features	Bluetooth, Portable, RGB Lighting, FM Radio, TWS, USB, AUX, Voice Assistant, Hands-free
Waterproof Rating	IPX5
Power Source	Battery
Battery Capacity	3000mAh (3E+3 Milliamp Hours)
Average Battery Life	4 Hours (at 50% volume)
Battery Composition	Lithium Ion
Control Method	Voice
Product Dimensions	20.7cm (depth) x 8.4cm (width) x 8.4cm (height)
Product Weight	2 Kilograms

# 10. WARRANTY AND SUPPORT

The Aiwa AWS200BT speaker comes with a limited warranty. For specific warranty terms and conditions, please refer to the warranty card included in your package or contact Aiwa customer support. For technical support, troubleshooting assistance, or general inquiries, please visit the official Aiwa website or contact their customer service department.

· Warranty Type: Limited

#### **Related Documents - AWS200BT**

