

Viozon OL-3L

Viozon 2-in-1 Monitor and Laptop Desk Mount Arm (Model OL-3L) Instruction Manual

Optimize your workspace with adjustable monitor and laptop support.

INTRODUCTION

Thank you for purchasing the Viozon 2-in-1 Monitor and Laptop Desk Mount Arm. This product is designed to enhance your ergonomic setup by providing adjustable support for both your monitor and laptop, freeing up valuable desk space and promoting a healthier posture. Please read this manual carefully before installation and use to ensure proper setup and safe operation.

SAFETY INFORMATION

- Ensure the desk surface is sturdy enough to support the combined weight of the mount, monitor, and laptop.
- Do not exceed the maximum weight capacity of 9kg (19.8 lbs) per arm.
- Verify that your monitor has VESA mounting holes (75x75mm or 100x100mm).
- Keep children and pets away during installation.
- Tighten all screws firmly but do not overtighten to avoid stripping threads.
- Regularly check all connections and adjustments to ensure stability.

PACKAGE CONTENTS

Please verify that all components are present before beginning installation. Refer to the product packaging for a detailed list of included parts.

SETUP INSTRUCTIONS

1. Choose Your Mounting Method

The Viozon desk mount supports two installation methods: Clamp Type and Grommet Type. Select the method suitable for your desk.



クランプ式

テーブルの厚さ
15 ~ 60mm



ホール式

穴の直径 テーブルの厚さ
≥ 70mm 15 ~ 60mm

2つの装着方法

※商品を購入する前に、テーブルの厚さと取り付け穴の直径をご確認ください。



素早く設置

モニターの設置と外しは
とっても便利です。



ケーブル管理

よりきれいなデスクトップ




Image: Clamp and Grommet Mounting Options. The clamp type is suitable for desk thicknesses between 15-60mm. The grommet type requires a hole diameter of 70mm or more and a desk thickness of 15-60mm.

2. Assemble the Arm and Attach to Desk

Follow the instructions provided with your product to assemble the arm components and securely attach the base to your desk using either the clamp or grommet method. Ensure the base is stable before proceeding.

3. Attach Monitor and Laptop Tray

Attach your VESA-compatible monitor (17-32 inches) to the monitor arm using the provided screws. For your laptop (12-17 inches), place it securely on the laptop tray. Ensure both are firmly attached.

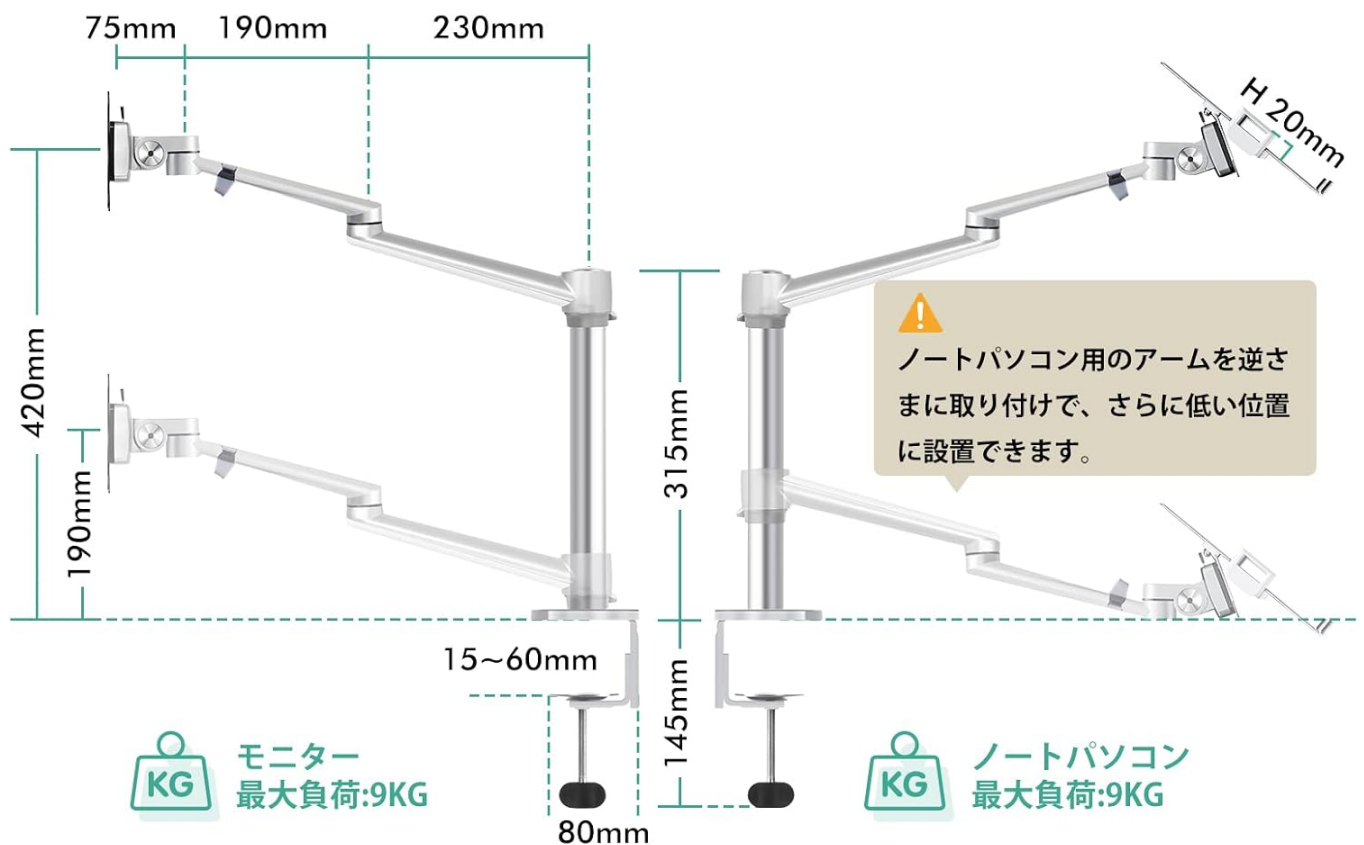

・VESAマウント 17-32インチモニター対応



- VESA:75mm*75mm
- VESA:100mm*100mm

⚠️ お使いのモニターに VESA穴があることを確認してください。

・ノートパソコンプレート 12-17インチノートパソコン対応



Image: Product dimensions and compatibility. Supports 17-32 inch VESA monitors (75x75mm, 100x100mm) and 12-17 inch laptops.

4. Adjust Tension

The arm features tension adjustment to accommodate different weights and allow for smooth movement. Use the included hex wrench to adjust the tension. Turn clockwise to increase tension (for heavier devices) and counter-clockwise to decrease tension (for lighter devices).

張力を調整

ネジを時計回りに回ると、張力を上げます。

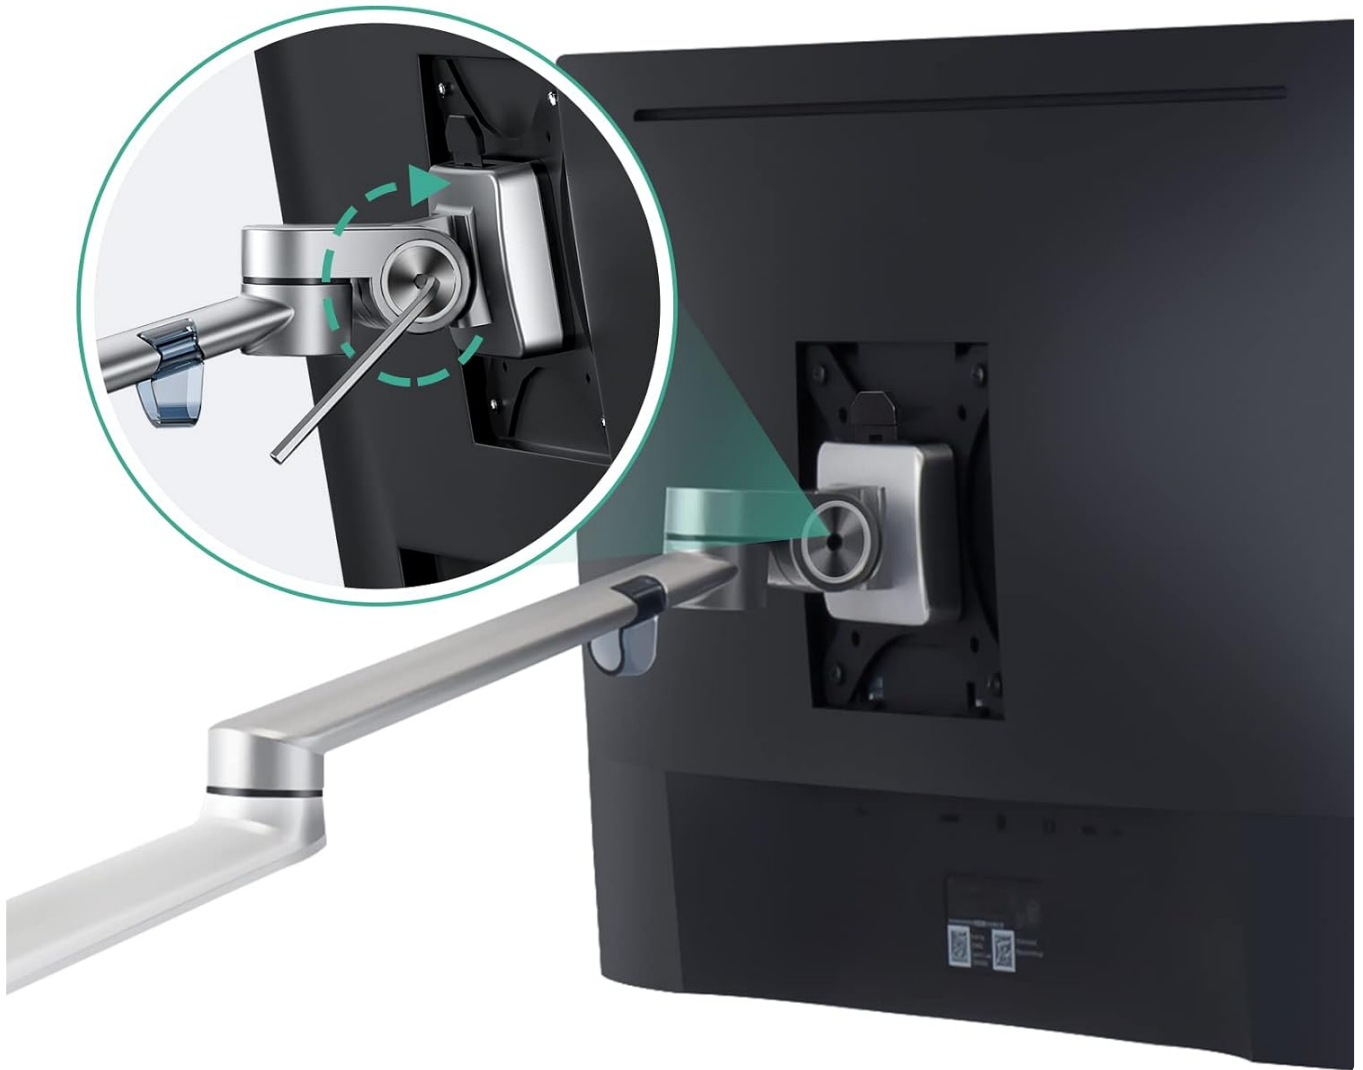


Image: Adjusting arm tension. Turn the screw clockwise to increase tension for heavier monitors.

OPERATING INSTRUCTIONS

Once installed, you can adjust your monitor and laptop to your preferred ergonomic position.

Adjusting Position

- **Height Adjustment:** The arm allows for vertical adjustment to align your screen at eye level.
- **Tilt:** Tilt your monitor up to $\pm 90^\circ$ to reduce glare and optimize viewing angles.
- **Swivel:** Swivel the monitor $\pm 45^\circ$ to share your screen with others or change orientation.
- **Rotation:** Rotate the monitor 360° for portrait or landscape viewing.



Image: Monitor adjustment capabilities including tilt, rotation, and swivel.

Cable Management

Utilize the integrated cable management clips along the arm to route and conceal cables, maintaining a clean and organized workspace.

viozon®

ラップトップ&モニター デスクマウント OL-3L



Image: Cable management feature for a tidy desktop.

MAINTENANCE

- Clean the mount with a soft, damp cloth. Avoid abrasive cleaners.
- Periodically check all screws and connections to ensure they remain tight and secure.
- Do not lubricate the moving parts unless specifically instructed by the manufacturer.

TROUBLESHOOTING

Monitor Tilting Down (Loose Adapter)

If your monitor is tilting downwards and does not hold its position, the tension in the adapter may be too loose. Use the provided hex wrench to turn the screw in the '+' direction to increase tension until the monitor holds its desired angle.

Video: Troubleshooting monitor tilting. This video demonstrates how to adjust the tension screw on the monitor arm to prevent the monitor from tilting downwards. Use the hex wrench to tighten the screw in the '+' direction.

Laptop Tray or VESA Mount is Tilted

If the laptop tray or VESA mount appears tilted or not level, you can adjust its rotation. The VESA plate and laptop tray can be rotated to correct any misalignment. Gently rotate the component until it is level.

Video: Troubleshooting tilted laptop tray or VESA mount. This video shows how to adjust the rotation of the VESA mount and laptop tray to ensure they are level.

SPECIFICATIONS

Brand	Viozon
-------	--------

Model Number	OL-3L
Material	Aluminum
Color	Silver
Monitor Compatibility	17-32 inches (VESA 75x75mm, 100x100mm)
Laptop Compatibility	12-17 inches
Max Load Capacity (per arm)	9 kg (19.8 lbs)
Mounting Type	Desk Clamp or Grommet
Adjustments	Height, Tilt ($\pm 90^\circ$), Swivel ($\pm 45^\circ$), Rotation (360°)

WARRANTY AND SUPPORT

Viozon products come with a standard manufacturer's warranty. For specific warranty details, please refer to the warranty card included with your product or visit the official Viozon website. If you encounter any issues or require assistance, please contact Viozon customer support through the contact information provided on the product packaging or their official website.

© 2024 Viozon. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B086BJDL3K>

More documents and user manuals: <https://manuals.plus/>