

GLOBE 50240

Globe Electric Wi-Fi Smart Security Light User Manual

Model: 50240

INTRODUCTION

The Globe Electric Wi-Fi Smart Security Light is designed to provide enhanced home security and smart lighting control. This device integrates a 1080p Wi-Fi camera with motion-activated floodlights, offering features such as live view, two-way audio, motion detection notifications, and customizable lighting. It operates without a separate hub, connecting directly to your home's 2.4 GHz Wi-Fi network and can be controlled via the GLOBE SUITE App or voice commands through compatible smart assistants.

SAFETY INFORMATION

Please read and understand all instructions before installing and operating this product. Failure to do so may lead to electric shock, fire, or other injuries that could be hazardous or even fatal. Keep this manual for future reference.

- **Electrical Safety:** Always disconnect power at the circuit breaker before installation or servicing. Ensure proper grounding.
- **Installation:** This product must be installed by a qualified electrician in accordance with local electrical codes.
- **Outdoor Use:** Designed for outdoor use. Ensure all connections are waterproof and sealed to prevent moisture ingress.
- **Light Source:** Do not stare directly into the LED light source when illuminated.
- **Temperature:** Do not operate in temperatures outside the specified range.

PACKAGE CONTENTS

Verify that all components are present before beginning installation.

- Globe Electric Wi-Fi Smart Security Light (Model 50240)
- Mounting Accessories (screws, wire nuts, mounting plate)
- Quick Start Guide



Image: The Globe Electric Smart Outdoor Security Floodlight shown in its retail packaging, highlighting its features and design.

SETUP

1. Installation (Hardware)

1. **Turn off Power:** Locate the circuit breaker controlling the outdoor light fixture and turn off the power. Verify power is off using a voltage tester.
2. **Remove Existing Fixture:** Carefully remove your existing outdoor light fixture.
3. **Mounting Plate:** Attach the provided mounting plate to the junction box using the supplied screws.
4. **Wiring:** Connect the security light's wires to your home's electrical wires:
 - Black wire (Live) to Black wire (Live)
 - White wire (Neutral) to White wire (Neutral)
 - Green/Bare copper wire (Ground) to Green/Bare copper wire (Ground)

Secure connections with wire nuts.

5. **Secure Fixture:** Mount the security light to the mounting plate, ensuring a tight and secure fit.
6. **Seal:** Apply weather-resistant sealant around the base of the fixture to prevent water entry.
7. **Restore Power:** Turn the power back on at the circuit breaker.

2. App Setup (Software)

1. **Download App:** Download the "GLOBE SUITE" app from the Apple App Store or Google Play Store.
2. **Create Account:** Open the app and create a new account or log in if you already have one.
3. **Add Device:** Tap the "+" icon in the app to add a new device. Select "Security Camera" or "Smart Light" category.
4. **Connect to Wi-Fi:** Follow the in-app instructions to connect the security light to your home's 2.4 GHz Wi-Fi network.

Ensure your phone is also connected to the 2.4 GHz network during setup. You can switch back to 5 GHz after successful pairing.

5. **Pairing:** The app will guide you through the pairing process, which may involve scanning a QR code on the device or entering a code.
6. **Name Device:** Once connected, give your security light a descriptive name (e.g., "Front Yard Light").

OPERATING INSTRUCTIONS

Live View and Two-Way Audio

Access real-time video and audio from your security light at any time through the GLOBE SUITE App.

- **Access Live Feed:** Open the GLOBE SUITE App and select your security light from the device list. The live video feed will appear.
- **Two-Way Audio:** Tap the microphone icon in the app to speak through the security light's speaker. Tap the speaker icon to hear audio from the security light's microphone.
- **Recording:** Use the record button to manually record video clips to your phone.
- **Screenshot:** Use the camera icon to capture still images from the live feed.

View your security camera
from anywhere.



Image: A smartphone screen showing a live view from the security camera, capturing a driveway scene, demonstrating remote monitoring capabilities.

Motion Detection and Notifications

The security light detects motion up to 68 feet (21 meters) and sends instant notifications to your phone.

- **Enable Notifications:** In the app settings for your device, ensure motion detection alerts are enabled.
- **Adjust Sensitivity:** You can adjust the motion detection sensitivity to minimize false alerts.
- **Review Events:** All motion-triggered events are recorded and can be reviewed in the app's playback history.

Receive notifications when
motion is detected.



Image: A smartphone displaying a push notification from the GLOBE SUITE app, indicating "Motion Detection: Security Floodlight has detected movement," with a black dog resting in the background.

Light Control (Brightness, Color Temperature, RGB)

Customize your lighting experience directly from the GLOBE SUITE App.

- **Brightness Adjustment:** Use the slider in the app to dim or brighten the floodlights (1600 Lumens max).
- **Tunable White:** Adjust the color temperature from warm white (2200K) to cool daylight (5000K) to suit your preference or time of day.
- **Multicolor RGB:** Select from a wide spectrum of colors to create ambient lighting or festive displays.
- **Schedules and Scenes:** Set up automated schedules for lighting on/off times or create custom scenes for different moods or events.

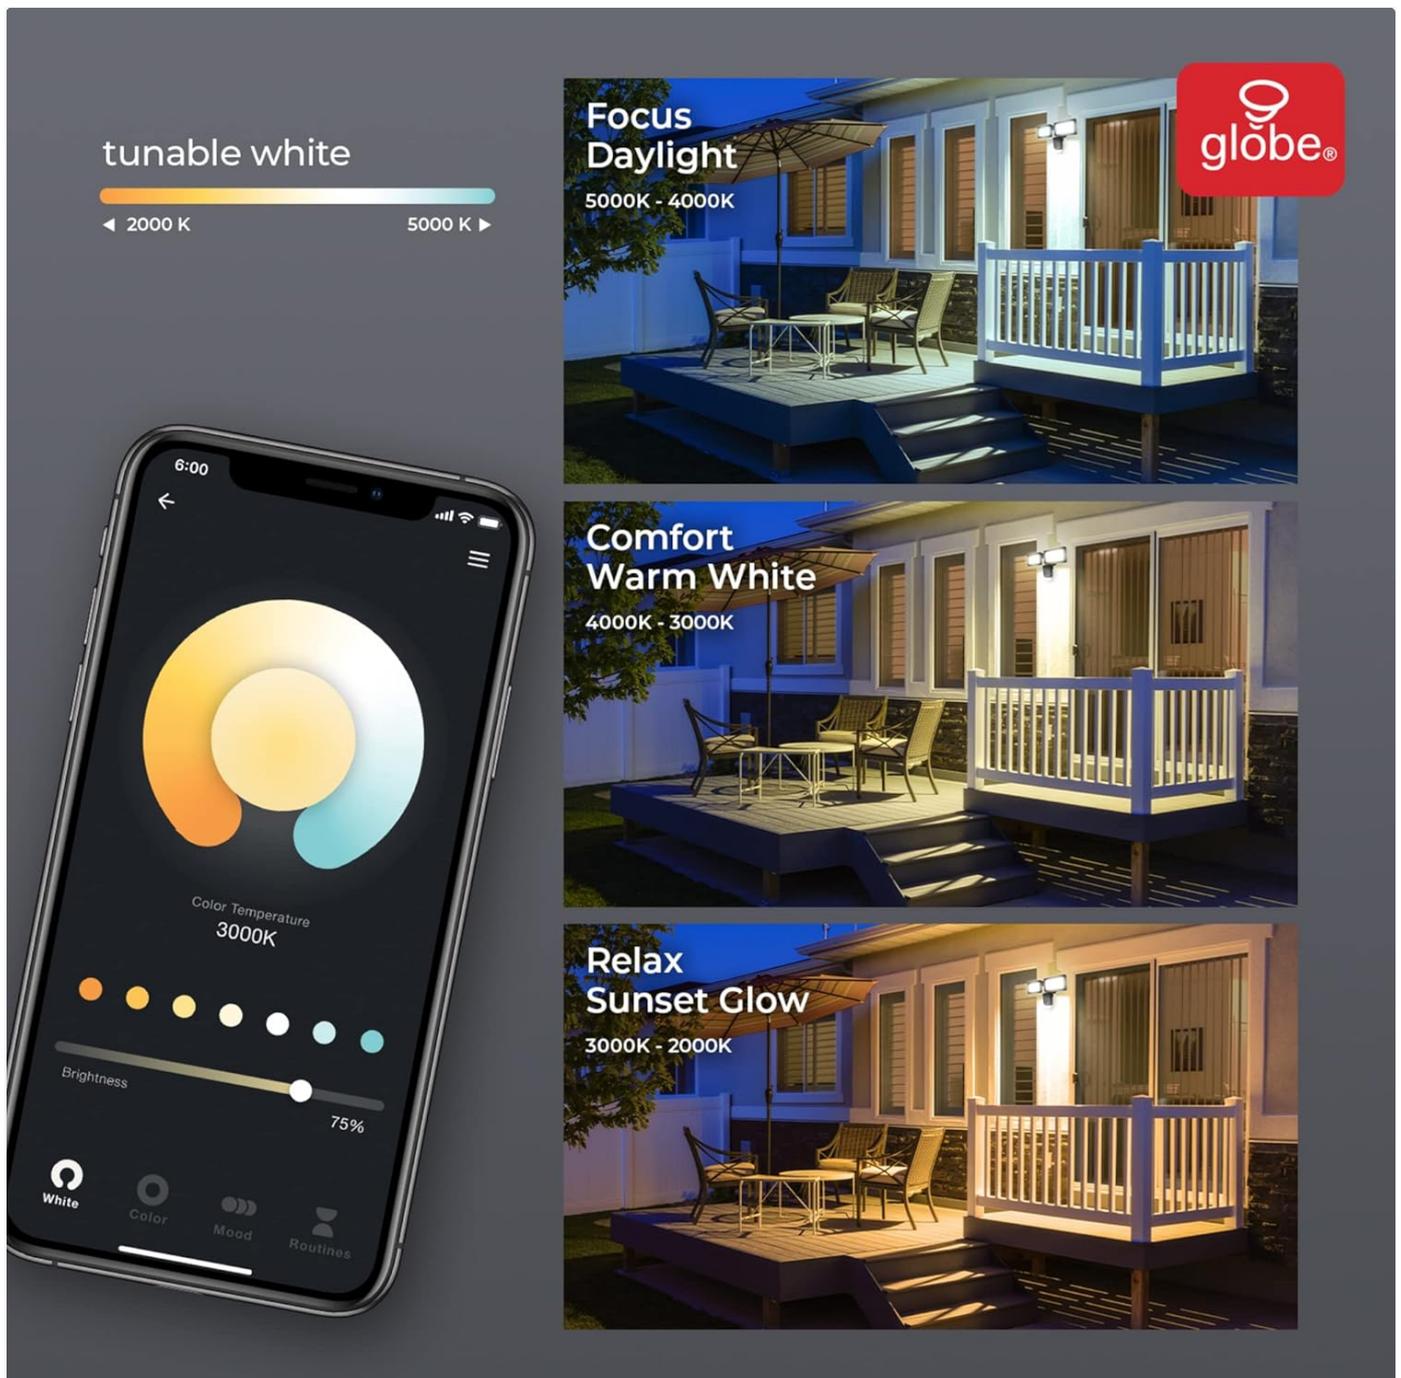


Image: A smartphone displaying the GLOBE SUITE app interface for tunable white light, showing options for Focus Daylight (5000K-4000K), Comfort Warm White (4000K-3000K), and Relax Sunset Glow (3000K-2000K), with corresponding outdoor lighting examples.

Adjust color and brightness
from anywhere.

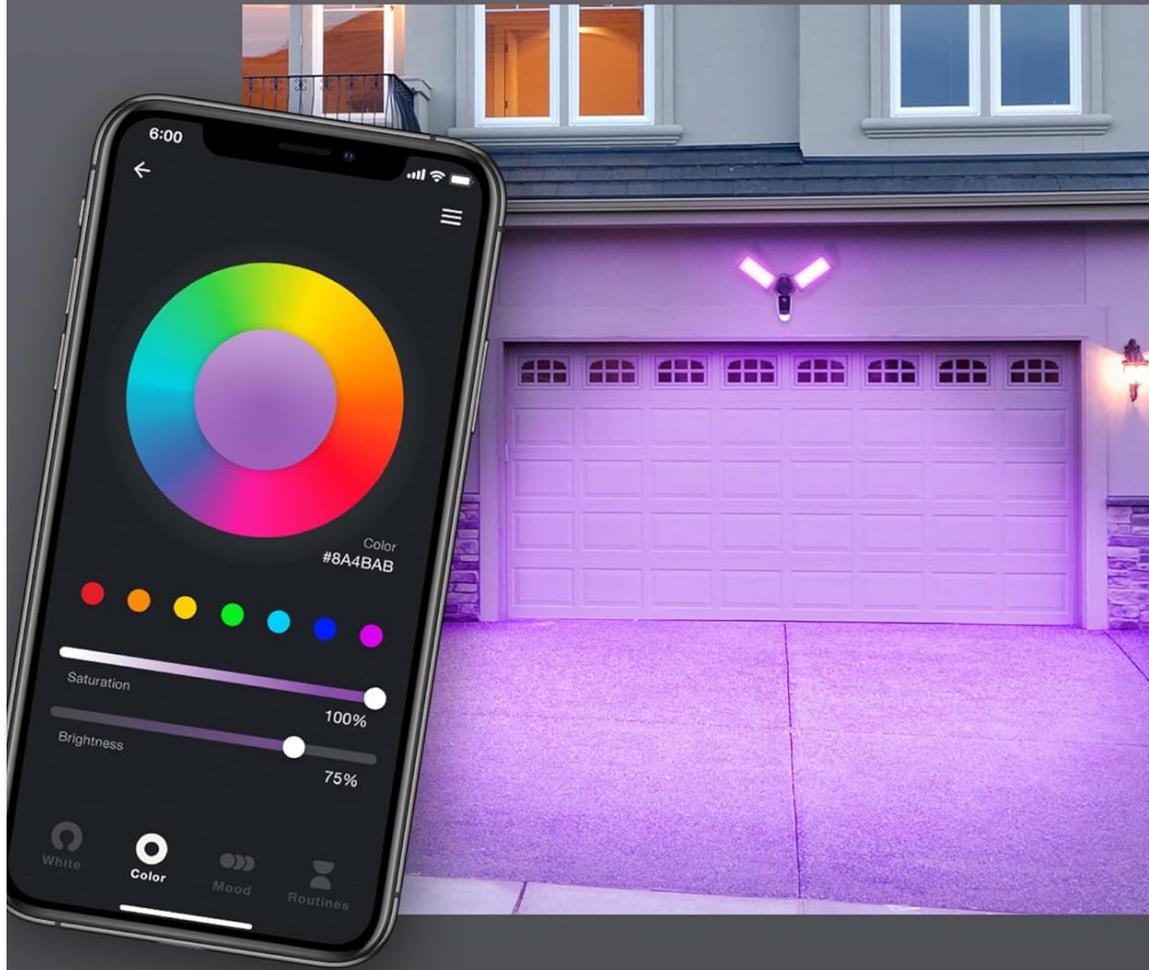


Image: A smartphone displaying the GLOBE SUITE app interface for adjusting color and brightness, showing a color wheel and saturation/brightness sliders, with an outdoor garage illuminated in purple light.

Voice Activation and Smart Home Integration

Control your security light using voice commands through compatible smart assistants.

- **Supported Platforms:** Works with Amazon Alexa, Google Assistant, and can be added to Apple HomeKit (via Siri Shortcuts) and SmartThings.
- **Linking Accounts:** Follow the instructions in your smart assistant's app (e.g., Alexa app, Google Home app) to link your GLOBE SUITE account.
- **Voice Commands:**
 - "Alexa, turn on Front Yard Light."
 - "Hey Google, set Front Yard Light to blue."
 - "Siri, show me the Front Yard Camera." (Requires Siri Shortcut setup)

Smart Home made easy™



Image: The Globe Electric Smart Security Floodlight displayed with logos indicating compatibility with Amazon Alexa, Hey Google, Add to Siri, and Works with SmartThings, emphasizing its smart home integration.

Night Vision

The camera automatically switches to night vision mode in low-light conditions, providing clear black and white video.



Night vision mode for when it's dark.



Image: A smartphone screen showing a night vision view from the security camera, displaying a backyard scene in monochrome, demonstrating its low-light capabilities.

MAINTENANCE

- **Cleaning:** Periodically wipe the camera lens and light surfaces with a soft, damp cloth to remove dust and debris. Do not use harsh chemicals or abrasive cleaners.
- **Firmware Updates:** Keep the GLOBE SUITE App and your security light's firmware updated to ensure optimal performance and access to new features. The app will notify you of available updates.
- **MicroSD Card:** If using a MicroSD card, periodically check its status in the app and format it if necessary to maintain recording quality. Replace the card if it becomes corrupted or full.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Device offline in app.	No power; Wi-Fi signal weak or disconnected; Router settings changed.	Check power supply. Ensure Wi-Fi router is on and within range. Restart router and device. Re-pair device if necessary.
Motion detection not working or too sensitive.	Incorrect sensitivity settings; Obstructions; Environmental factors (e.g., swaying trees).	Adjust motion detection sensitivity in the app. Clear any obstructions. Consider placement to avoid false triggers.
Cannot connect to Wi-Fi during setup.	Incorrect Wi-Fi password; Not on 2.4 GHz network; Device too far from router.	Double-check Wi-Fi password. Ensure your phone and device are on a 2.4 GHz network. Move device closer to router or use a Wi-Fi extender.
Lights not responding to app/voice commands.	Device offline; App glitch; Voice assistant not linked.	Check device status in app. Restart app. Re-link voice assistant account if disconnected.

SPECIFICATIONS

Feature	Detail
Model Number	50240
Power Source	Hardwired
Voltage	120 Volts
Wattage	24 Watts
Brightness	1600 Lumens
Color Temperature	2200K - 5000K (Tunable White)
Color Options	Multicolor (RGB)
Light Source Type	LED
Camera Resolution	1080p FHD
Field of View	240 Degrees
Motion Detection Range	Up to 68 feet (21 meters)
Wi-Fi Connectivity	2.4 GHz
Local Storage	MicroSD card (up to 128GB, not included)

Feature	Detail
Dimensions	5.63 x 21.1 x 4.35 inches
Weight	2 Pounds
Material	Plastic
Color	Black

WARRANTY AND SUPPORT

This Globe Electric Wi-Fi Smart Security Light (Model 50240) comes with a **2-year manufacturer's limited warranty** from the date of purchase. This warranty covers defects in materials and workmanship under normal use.


For warranty claims, technical support, or further assistance, please contact Globe Electric Customer Service:

- **Website:** Visit the official Globe Electric website for support resources, FAQs, and contact information.
- **Phone:** Refer to the Quick Start Guide or Globe Electric website for customer service phone numbers.
- **Online Support:** Many issues can be resolved by checking the GLOBE SUITE App's help section or online knowledge base.

Please have your model number (50240) and proof of purchase ready when contacting support.

© 2024 Globe Electric. All rights reserved.

Documents - GLOBE – 50240

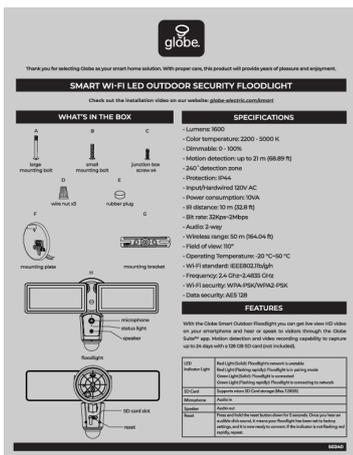


[\[pdf\] User Manual](#)

50240 INS loRes User Manual Globe Electric Company Inc GE50240 2AQUQGE50240 ge50240

...


lang: **score:18** filesize: 2.39 M page_count: 12 document date: 2020-08-31

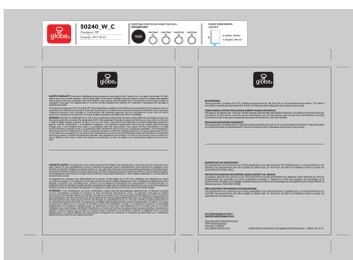

[Globe Electric 50240_W_C Smart Floodlight Security Camera User Information](#)

This document provides warranty information, FCC compliance, and radiation exposure guidelines for the Globe Electric 50240_W_C Smart Floodlight Security Camera. It includes details on product specifications and safety precautions.


lang: **score:18** filesize: 507.33 K page_count: 1 document date: 2021-05-05

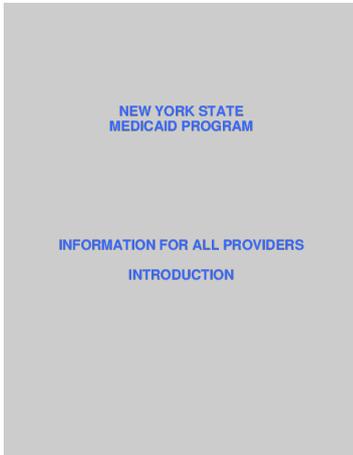

[\[pdf\]](#) User Manual Instructions Declaration of Conformity


Microsoft Word Physician Provider Manual doc eMedNY org The purpose of this is the provision information and guidance to those providers who participate in New York State Medicaid Program It designed provide instructions for understanding completion forms documents relating billing procedures serve as a reference additional that york state medicaid program Hard copies Manuals are available do not have access Internet emedny ProviderManuals S

NEW YORK STATE MEDICAID PROGRAM INFORMATION FOR ALL PROVIDERS INTRODUCTION Information For All Pro ... a caval thrombectomy 200.00 90 320.00 90 365.00 90 390.00 90 5.0 T 5.0 T 5.0 T 5.0 T 50234 50236 **50240** When vena caval resection with reconstruction is necessary use 37799 Nephrectomy with tota... lang:en score:17 filesize: 2.65 M page_count: 781 document date: 2008-05-13

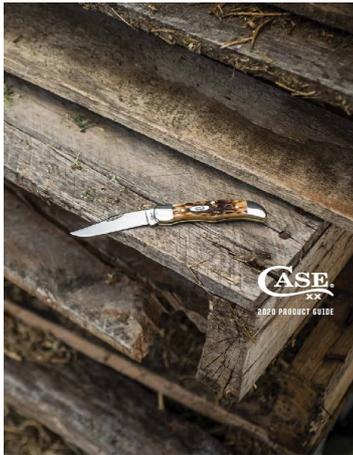

[\[pdf\]](#) Guide Catalog

Case® 2020 Product Guide caseknives 2020CaseCoreCatalog cdn shopify s files 1 2792 2628 ||| 2020 PRODUCT GUIDE 4 Pocket Hunter 6 Curly Maple Wood 7 Buffalo Horn 8 Olive Green Bone 9 Raspber ... th Anti-Tarnish Material 22 in 55.9 cm X 15 in 38.1 cm Made in the USA 83 2020 PRODUCT GUIDE **50240** CASE WOODEN SIGN Rustic Wood with Screen Print Logo Hanging Bracket Included 17 in 43.2 cm ... lang:en score:17 filesize: 5.59 M page_count: 100 document date: 2020-02-12

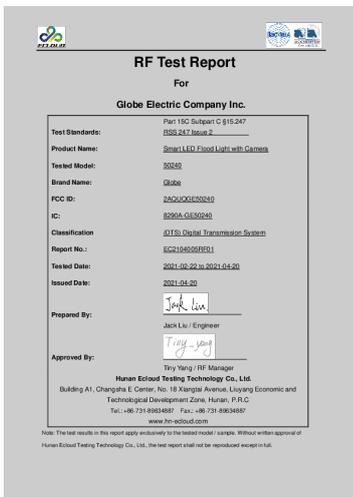


[\[pdf\]](#) Test Report

FCC RF Test Report wuhu Globe Electric Company Inc GE50240 Smart LED Flood Light with Camera 50240 2AQUQGE50240 ge50240

RF Test Report For Test Standards: Product Name: Tested Model: Brand Name: FCC ID: IC: Classification Report No.: Tested Date: Issued Date: Globe Electric Company Inc. Part 15C Subpart C 15.247 RSS 247 Issue 2 Smart LED Flood Light with Camera **50240** Globe 2AQUQGE50240 8290A-GE50240 DTS Digital ...

lang:en score:16 filesize: 5.34 M page_count: 119 document date: 2021-08-09

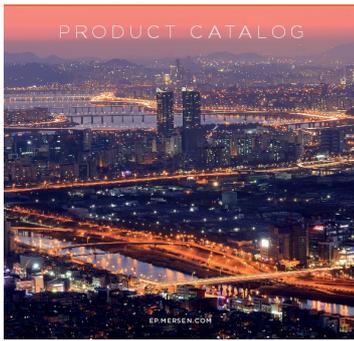

[\[pdf\]](#) Guide

9283 MERSEN GUIDE 2018 COUV impo indd 4 07 GB md elec ru files 2019 09 |||


SAFETY RELIABILITY FOR ELECTRICAL POWER PRO D U C T C ATALO G E P.
M E R S E N . C O M ELECTRICA ... -shaped lug art. no. 22SZSV1 1 set = 3 clamps
3 lugs V-terminal clamp size 1,2,3 for 2 conductors **50240** mmsingle solid, 50-185 mm
single stranded, 50-185 mm round stranded, 70-240 mm round solid M =...
lang:en score:15 filesize: 46.96 M page_count: 348 document date: 2019-07-04



[\[pdf\]](#) Guide Catalog

Wolseley Plumbing Heating Guide 2021 wolseley co uk wcsstore ExtendedSitesCatalogAssetStore
images products AssetPush DTP AssetPushHighRes std lang all 20 21 |||


wolseley.co.uk Plumbing Heating Product Selector Trade Only 2021 Widest range
Best service Gr ... design Long life gland packing with rising spindle 5 Year
manufacturer s guarantee Code 250232 **250240** 250236 Description 367CPWH
15mm - angled 367CPWH 10mm - angled 367CPWH 8mm - angled Trade Pr...
lang:en score:13 filesize: 43.73 M page_count: 504 document date: 2020-12-22

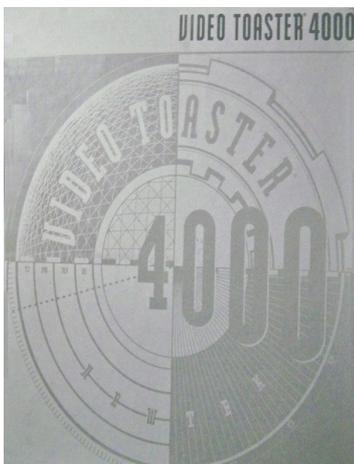

[\[pdf\]](#) User Manual Flyer

Video Toaster 4 0 Manual 1 file 4000 NewTek Free Download Borrow and Streaming Internet Archive
ENG archive org video toaster manual |||

Important! Last-Minute Changes Read these notes before operating your Video
Toaster Flyer The f ... nformation about the MegaChip, contact its manufacturer at the
address and phone number below. OKB **50240** W. Pontiac Trail Wixom, MI 48393
Tech Support 810-960-8750 Sales 810-960-8751 FAX 810-960...
lang:en score:12 filesize: 52.21 M page_count: 565 document date: 2010-10-06

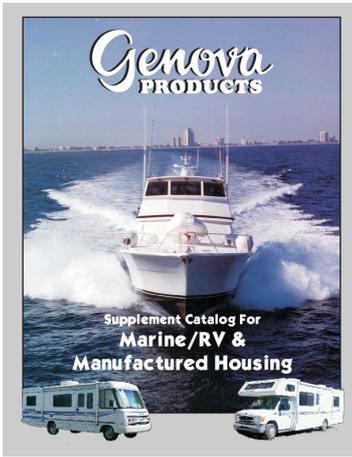

[\[pdf\]](#) Instructions Specifications Catalog

Marine Catalog 6 26 06 cdr atturner Supplement For RV Manufactured Housing All Tubular parts come merchandised in colored bags with installation instructions and bar codes Refer to the 700 800 series product lines for Sch 40 PVC ABS traps trap adapters FLANGED TAILPIECE ADJUSTABLE DISHWASHER DISPOSAL CONNECTOR W CLAMPS 274001 SpecSheet content interlinebrands document 10080

Supplement Catalog For Marine/RV Manufactured Housing TABLE OF CONTENTS
 100 Series Solvents a ... x 1/2 10 100 4 50217 1 x 3/4 10 100 3 50245 1 x 1/2 10 100
 6 50247 1 x 3/4 10 100 6 **50240** 1 x 1 10 100 5 50255 1 x 1/2 10 100 9 50257 1 x 3/4
 10 100 10 50250 1 x 1 10 ...

lang:en score:11 filesize: 3.07 M page_count: 66 document date: 2006-10-06

JABRA: HELPING LUFTHANSA GET THE JOB DONE

Founded in 2005, Global Tele Sales Brno s.r.o. (GTS Brno) provides customer service support for Lufthansa, SWISS International Airlines and Austrian Airlines. A subsidiary of GTS Group, GTS Brno assists customers in central Europe with services such as web support, customer feedback and claims handling.

THE CHALLENGE
 With over 400 living service centers spread across the globe, including 400 in Brno, Czech Republic, the company has extensive customer service knowledge related to the unique brand and logistic solutions. In an effort to be best, the company must ensure that its employees are well equipped to serve customers in their line of work. Most importantly, this means being able to effectively communicate.

When GTS Brno opened its doors in 2005, this meant not to different levels of the service center's job experience spread around 70 percent of their time on the phone with customers, so the company needed the support of a partner to help them reach their goals. GTS Brno is looking for a top of the line headset with exceptional noise cancellation features.

THE SOLUTION
 GTS Brno's search for the perfect headset solution led to the testing of several brands, including Plantronics. However, after a comparison to Jabra products, the team gravitated with other vendors and found that they ultimately quality system, such as great call quality, convenient touch and ease of use.

Master Sales, CT specialist at GTS Brno, said that the real point was the time being that could have been spent because it demonstrated Jabra's better sound quality and enhanced ergonomics.

COMPANY	Global Tele Sales Brno s.r.o.
Country	Czech Republic
Industry	Customer service

PROBLEM
 Founded in 2005, Global Tele Sales Brno s.r.o. (GTS Brno) provides customer service support for Lufthansa, SWISS International Airlines and Austrian Airlines.

INDUSTRY CHALLENGE
 The company needed a superior headset solution with proven noise cancellation features.

PHONE SYSTEM	Cloud-based, IP-based
---------------------	-----------------------

JABRA SOLUTION
 Products: Jabra Evolve 800 Duo HD

BUSINESS BENEFITS
 • Improved sound quality
 • Ease of use
 • Excellent customer service

Logos: Lufthansa, GTS Group, Jabra 100% HD

[\[pdf\]](#) Documentation


CS LUFTHANSA 50240 V01 1407 low jabra media Documentation Customer Stories la en au AU ~ nl NL

JABRA: HELPING LUFTHANSA GET THE JOB DONE CUSTOMER STORY

Founded in 2005, Global Tele Sales Brno s ... re. MORE INFORMATION Please visit www.jabra.com for more information. CUSTOMER STORY

CS_LUFTHANSA_50240_V01_1407 JABRA.COM ...

lang:en score:10 filesize: 982.74 K page_count: 2 document date: 2014-07-18

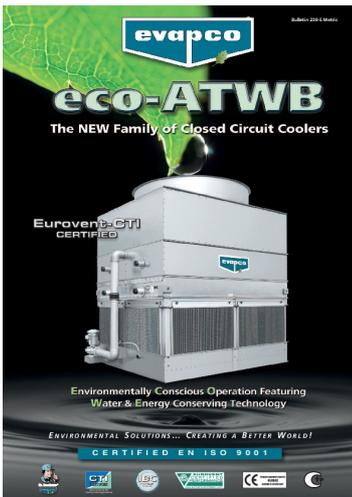

[\[pdf\]](#) User Manual Declaration of Conformity

eco ATWB 230 E Trane Manual Bypass DC power supply for the PLC and instrumentation Heater Package Controls w Contactor with Overload Protection ECO EN tranebelgium files product doc 106 nl Bulletin 230-E Metric ENVIRONMENTAL SOLUTIONS... CREATING A BETTER WORLD CERTIFIED EN ISO9001 M ... 2 37 122,6 2 5.5 151,2 6832 5450 2 300 44730 5369 2191 3178 1213 eco-ATWB 12-6P36 35160 15800 **50240** 2 45 129,0 2 5.5 151,2 6832 5450 2 300 44910 5369 2191 3178 1213 Model Numbers end in ...

lang:en score:9 filesize: 9.99 M page_count: 76 document date: 2014-04-23




[pdf] Label

EMC RFXIAOZHI Label Globe Electric Company Inc GE50240 Smart LED Flood Light with Camera 50240 2AQUQGE50240 ge50240

150240_Label Location ...

lang:en score:9 filesize: 390.51 K page_count: 1 document date: 2021-08-02

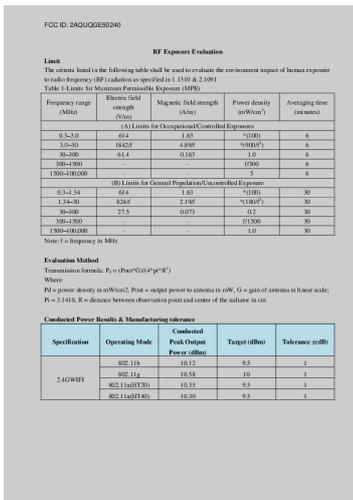


[pdf] Specifications SAR Rating

zmp MPE Report Globe Electric Company Inc GE50240 Smart LED Flood Light with Camera 50240 2AQUQGE50240 ge50240

FCC ID: 2AQUQGE50240 RF Exposure Evaluation Limit The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency RF radiation as specified in 1.1310 2.1091 Table 1-Limits for Maximum Permissible Exposure MPE Frequency rang...

lang:en score:9 filesize: 93.99 K page_count: 2 document date: 2021-07-26

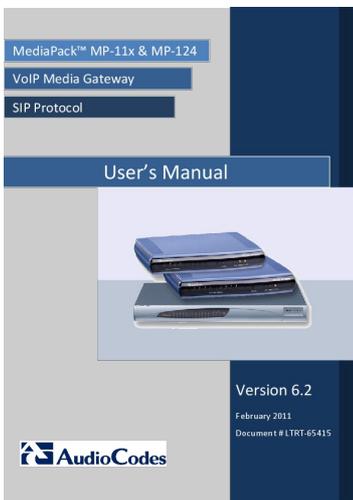

[pdf] User Manual

LTRT 65415 MP 11x and 124 SIP User s Manual Ver 6 2 audiocodes 80 filehandler ashx fileid 1327580 MediaPackTM MP-11x MP-124 VoIP Media Gateway SIP Protocol User s Manual Version 6.2 February 2011 ... 51121 Call-ID: 991750671245200001912 10.33.4.125 CSeq: 1 BYE X-RTP-Stat:

PS=207;OS=49680;;PR=314;OR=50240;PL=0;JI=600;LA=40; Supported: em,timer,replaces,path,resource-priority Allow: REGISTER,OPTIONS...

lang:en score:9 filesize: 7.42 M page_count: 504 document date: 2011-02-14