

## Logitech Z606

# Logitech Z606 5.1 Surround Sound Speaker System User Manual

Model: Z606

## INTRODUCTION

---

This manual provides comprehensive instructions for the setup, operation, maintenance, and troubleshooting of your Logitech Z606 5.1 Surround Sound Speaker System. Please read this manual carefully before using your speaker system to ensure optimal performance and longevity.

## PACKAGE CONTENTS

---

Verify that all components are present in your package:

- Subwoofer with integrated control panel
- Five satellite speakers (Front Left, Front Right, Center, Rear Left, Rear Right)
- Remote control
- Speaker cables (including extra-long cables for rear satellites)
- Power cable



Image: The Logitech Z606 5.1 Surround Sound Speaker System, showing the central subwoofer, five satellite speakers, and the remote control. This illustrates the complete system.


## SETUP

---

### 1. Speaker Placement

Proper speaker placement is crucial for optimal 5.1 surround sound experience. Refer to the diagram below for recommended placement.

- **Front Left and Right Speakers:** Place these speakers equidistant from your listening position, typically on either side of your display.
- **Center Speaker:** Position the center speaker directly in front of your listening position, usually above or below your display.
- **Rear Left and Right Speakers:** Place these speakers behind your listening position, slightly to the sides. The Z606 includes extra-long 20-foot (6.2 meter) cables for flexible placement.
- **Subwoofer:** The subwoofer can be placed anywhere in the room, but often performs best when positioned in a corner or near a wall to enhance bass response.

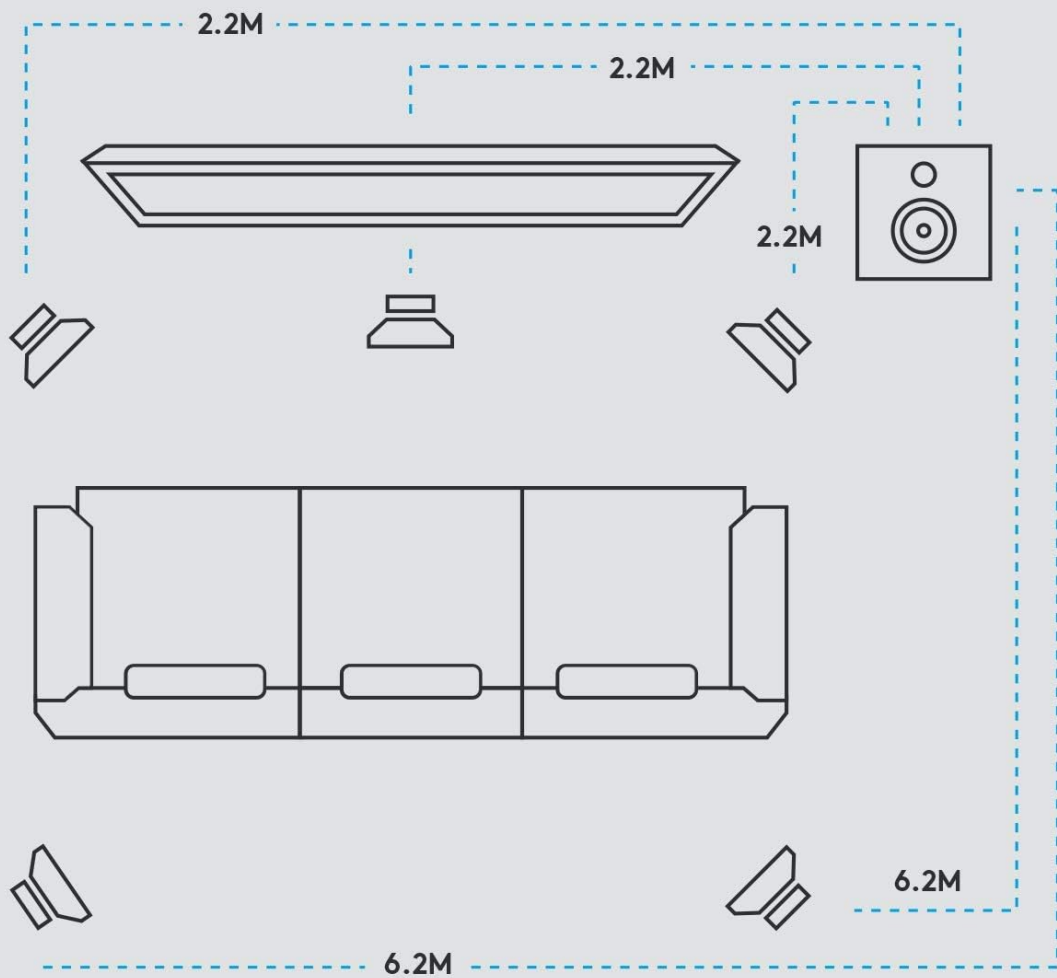


## LONG 6.2 METER REAR CABLES FOR OPTIMAL SPEAKER PLACEMENT

Image: A diagram illustrating the recommended placement of the 5.1 speaker system components (subwoofer, front, center, and rear satellites) around a listening area, with cable lengths indicated for optimal setup.

### 2. Connecting the Speakers

Connect each satellite speaker to the corresponding output on the rear of the subwoofer. Ensure the positive (+) and negative (-) terminals on the speaker match those on the subwoofer.

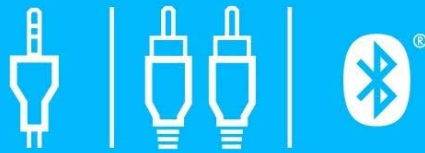

## AUDIO SUPPORT

Connect devices via Bluetooth wireless and wired  
RCA/3.5mm inputs

Image: The rear panel of the Logitech Z606 subwoofer, showing the various input ports (RCA, 3.5mm, Bluetooth indicator) and speaker output terminals for connecting the five satellite speakers.

### 3. Connecting Audio Sources

The Z606 offers multiple connectivity options:

- **Bluetooth:** For wireless connection, activate Bluetooth on your device and pair with "Logitech Z606".
- **3.5mm Audio Jack:** Connect devices like smartphones, tablets, or computers using a 3.5mm audio cable to the AUX input.
- **RCA Cables:** Use RCA cables to connect to TVs, Blu-ray/DVD players, or gaming consoles.



## CONTROL AUDIO VIA SUBWOOFER CONTROL PANEL OR REMOTE CONTROL

Image: The Logitech Z606 subwoofer alongside its remote control, highlighting the various control options available for audio playback and system settings.

### OPERATING INSTRUCTIONS

---

#### Power On/Off

Use the power button on the subwoofer's control panel or the remote control to turn the system on or off.

#### Volume Control

Adjust the master volume using the large dial on the subwoofer or the volume buttons on the remote control.

#### Input Selection

Press the "Source" button on the subwoofer or remote to cycle through available audio inputs (Bluetooth, AUX, RCA).

#### Speaker Level Adjustment

The Z606 allows independent control over the volume of the front, rear, and center speakers, as well as the subwoofer. Use the remote control or the subwoofer's control panel to adjust these levels to your preference for balanced surround sound.



Image: A close-up view of the Logitech Z606 subwoofer's control panel, featuring the main volume dial, input selection buttons, and indicators for Bluetooth connectivity.

## MAINTENANCE

---

- **Cleaning:** Use a soft, dry cloth to clean the speaker surfaces. Avoid abrasive cleaners or solvents.
- **Ventilation:** Ensure the subwoofer and speakers have adequate ventilation to prevent overheating. Do not block any vents.
- **Cable Management:** Keep cables tidy and untangled to prevent damage and ensure clear audio signals.
- **Storage:** If storing the system for an extended period, disconnect it from power and store in a cool, dry place.

## TROUBLESHOOTING

Problem	Possible Cause	Solution
No sound from speakers	Power not connected Incorrect input selected Cables loose or incorrectly connected Source device volume too low or muted	Ensure power cable is securely plugged in and system is turned on. Select the correct audio input (Bluetooth, AUX, RCA). Check all speaker and audio input cables for secure connection. Increase volume on both the speaker system and the source device.
Distorted or poor sound quality	Volume too high Incorrect speaker level settings Poor audio source quality	Reduce volume. Adjust individual speaker levels for balance. Test with a different audio source or file.
Bluetooth pairing issues	Device too far from speakers Bluetooth not enabled on device Interference	Move device closer to the speakers. Ensure Bluetooth is enabled and discoverable on your device. Turn off other Bluetooth devices nearby. Try unpairing and re-pairing the device.

## SPECIFICATIONS

- **Model Name:** Z606
- **Speaker Type:** 5.1 Surround Sound System
- **Total Peak Power:** 160 Watts
- **Total RMS Power:** 80 Watts
- **Subwoofer Driver:** 5.25 inches
- **Frequency Response:** 50 Hz - 120 kHz
- **Connectivity:** Bluetooth 4.2, 3.5mm Audio Jack, RCA
- **Cable Length (Rear Satellites):** 20 feet (6.2 meters)
- **Dimensions (Subwoofer):** 33.3D x 41.4W x 29.8H Centimetres
- **Weight:** 0.01 Ounces
- **Color:** Black
- **Manufacturer:** Logitech



## 160 WATTS 5.1 SURROUND SOUND

Image: An overview of the Logitech Z606 5.1 Surround Sound Speaker System, emphasizing its 160 Watts of power and 5.1 surround sound capability.

### WARRANTY INFORMATION

---

This Logitech Z606 speaker system comes with a **Limited Warranty** provided by the manufacturer, Logitech. For specific details regarding warranty coverage, duration, and claims process, please refer to the warranty card included with your product or visit the official Logitech support website. Keep your proof of purchase for warranty validation.

### SUPPORT

---

For further assistance, technical support, or to access additional resources, please visit the official Logitech support website or contact their customer service. You can find contact information and FAQs on their website.

**Logitech Official Website:** [www.logitech.com/support](http://www.logitech.com/support)





[pdf] User Manual Quick Start Guide Documentation Guide

Setup Guide d installation Logitech 1 x User Manual 4 SAFETY INFORMATION Only use this air purifier Power ON OFF Turns unit on off 2 Sound Switches between 5 and channels only if input supports 3 Decrease the volume level 8 English AUX CHANNEL LEVEL — VOL RCA 6 9 11 12 7 10 Mute Mutes system from Bluetooth mode short press to select previous song Play Pause Pairing a Short play pause music b Long will start pairing LED quickly blink 'bt display Source Switch DVD subwoofer panel indicate related source z606 91OeVMkUjmL logitech assets 65669 images na ssl amazon I

**Z606** Setup Guide Guide d installation English . . . . . 3 Franais . . . . . BO PARA POSICIONAMENTO FLEXVEL 2.2M 2.2M 2.2M 34Portugus 6.2M 6.2M www.logitech.com/support/**z606** 2019 Logitech. Logitech, Logi and the Logitech logo are trademarks or registered trademarks of...

lang:en score:30 filesize: 1011 K page\_count: 35 document date: 2019-01-29

[pdf]

dc20a868 d47a 45d4 aa3b e704e49ac491 cdn cnetcontent dc 20 |||

**Z606** 5.1 Surround Sound with Bluetooth SURROUND YOURSELF WITH GREAT SOUND Logitech **Z606** delivers true 5.1 surround sound. With 160 Watts Peak power on tap, this 5.1 speaker system wraps your space in highquality audio that sounds amazing. Enjoy true surround sound from any source--your TV, phone, c...

lang:en score:18 filesize: 310.41 K page\_count: 2 document date: 2019-02-08



## [\[pdf\]](#) User Manual

Byte Nov 1986 restored ocr bookmarks by Steve 198611 Magazine Vol 11 12 Knowledge Representation page manual which is not as daunting it sounds because unlike many software manuals it was written by orangutans. Suggested retail vintageapple.org/byte/ia802909.us.archive.17/items/BYTE\_MAGAZINE\_COMPLETE

Turbo Pascal Programming 10.00 Scratch n Win Rebate your own create GrapllitSI High AeS 10 ... 1.59 Z60A-510/2 .. 4.69 3.89 Z60A510/9 . ... 4.89 3.89 3.89 Z-808 3.89 Z60B-CPU . . . 3.59 **Z606**CTC . . , .. 3.59 **Z606**PIO . . 3.59 149 **Z606**DART 10.89 1.69 **Z606** 510/0 ... 10.89 4.89 z90...

lang:en score:10 filesize: 50.66 M page\_count: 494 document date: 2018-10-04