

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [LAXIHUB](#) /

› [LAXIHUB B1 Video Doorbell Camera User Manual](#)

## LAXIHUB B1

# LAXIHUB B1 Video Doorbell Camera User Manual

Model: B1

## INTRODUCTION

---

Thank you for choosing the LAXIHUB B1 Video Doorbell Camera. This manual provides essential information for setting up, operating, and maintaining your device. The B1 is a 100% wireless, battery-powered doorbell camera offering 1080P Full HD video, night vision, two-way audio, and AI motion detection, compatible with Alexa and Google Assistant.

For optimal performance and safety, please read this manual thoroughly before use and retain it for future reference.

## PACKAGE CONTENTS

---

- LAXIHUB B1 Video Doorbell Camera
- Indoor Chime
- Mounting Bracket
- Mounting Screws and Anchors
- USB Charging Cable
- User Manual



Image: LAXIHUB B1 Video Doorbell Camera and its accompanying indoor chime.

## SETUP AND INSTALLATION

---

### 1. Charging the Battery

The B1 doorbell camera features a built-in 6700mAh rechargeable battery. Before initial use, fully charge the device using the provided USB charging cable. A full charge provides approximately 3 months of working time with an average of 10 wake-ups per day.



Image: Internal view of the LAXIHUB B1 doorbell, illustrating its battery compartment and wireless design.

## 2. App Download and Account Creation

Download the free LAXIHUB app from Google Play Store or Apple App Store. Follow the on-screen instructions to create an account and register your device. The app provides a user-friendly interface for managing your doorbell camera.

## 3. Wi-Fi Connection

The B1 camera supports 2.4GHz Wi-Fi networks only. Ensure your Wi-Fi network is 2.4GHz for successful connection. The installation and connection process is 100% wireless.

## 4. Mounting the Doorbell

Mount the doorbell camera using the provided mounting bracket, screws, and anchors. Choose a location that provides a clear view of your entrance. The device is designed for outdoor use with IP65 water resistance.

## OPERATING INSTRUCTIONS

---

### 1. Live View and Two-Way Audio

Access the live video feed from your doorbell camera through the LAXIHUB app. The B1 provides real-time full-duplex two-way audio, allowing you to see, hear, and speak with visitors directly from your smartphone. You can also create pre-recorded voice messages for quick replies.



Image: A person interacting with the LAXIHUB B1 doorbell, demonstrating the real-time two-way audio feature.

## 2. Motion Detection and Notifications

The B1 doorbell camera features AI motion detection, capable of identifying human and animal movement. You will receive push notifications on your phone when motion is detected in front of your door. The 145° wide-angle lens ensures comprehensive coverage.

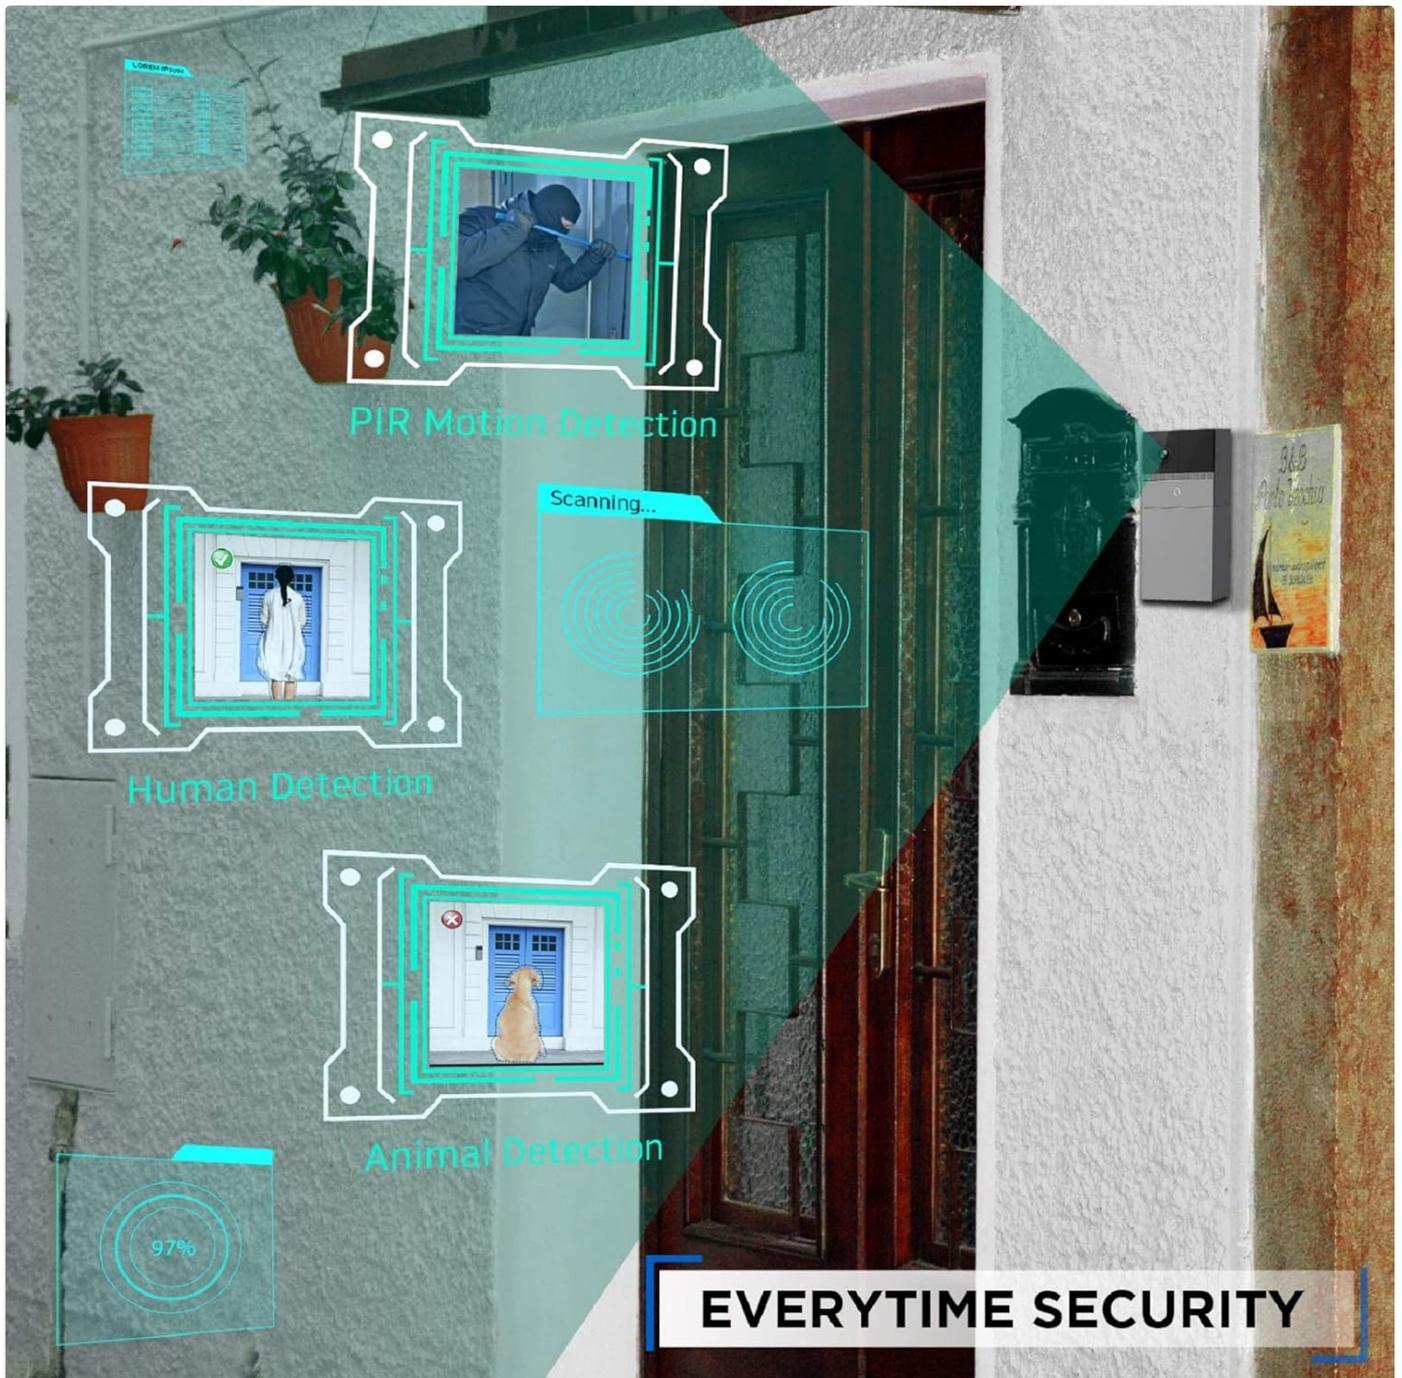


Image: Visual representation of the LAXIHUB B1 doorbell's PIR motion detection, human detection, and animal detection capabilities.

### 3. Night Vision

Built-in IR lights enable clear viewing even in low-light conditions or complete darkness. The intelligent IR-CUT automatically senses ambient light and switches to night vision mode, providing 1080P Full HD clarity day and night.



Image: Key features of the LAXIHUB B1 doorbell, including Full HD 1080p, Night Vision, Motion Detection, 100% Wireless, IP65 Weatherproof, and Two-way Audio.

#### **4. Smart Home Integration**

The B1 wireless outdoor security camera works seamlessly with Amazon Alexa and Google Assistant. You can access your camera's feed and features through your smart home devices.

### **MAINTENANCE**

---

#### **1. Battery Management**

To ensure continuous operation, monitor the battery level through the LAXIHUB app and recharge the doorbell when prompted. Battery life can vary based on usage frequency and environmental factors.

#### **2. Cleaning**

Periodically wipe the camera lens and the doorbell's exterior with a soft, damp cloth to remove dust and debris. Avoid

using harsh chemicals or abrasive materials.

### 3. Weather Resistance

The B1 doorbell is IP65 water-resistant, designed to withstand various weather conditions. However, extreme temperatures or prolonged exposure to direct heavy rain may affect performance. Ensure proper installation to prevent water ingress.



Image: The LAXIHUB B1 doorbell showcasing its IP65 weatherproof rating, capable of operating in conditions ranging from -4 to 122°F.

## TROUBLESHOOTING

Problem	Possible Cause	Solution
Device Offline / Cannot Connect	Weak Wi-Fi signal, incorrect Wi-Fi password, 5GHz Wi-Fi network.	Ensure the doorbell is within range of a strong 2.4GHz Wi-Fi signal. Verify Wi-Fi password. Restart your router and the doorbell.

Problem	Possible Cause	Solution
Short Battery Life	Frequent motion detections, cold weather, high usage.	Adjust motion detection sensitivity. Ensure the doorbell is fully charged. Battery performance may decrease in extreme cold.
Motion Detection Issues	Incorrect sensitivity settings, obstructions, environmental factors.	Adjust motion detection zones and sensitivity in the app. Ensure no objects are blocking the sensor.
Audio Issues (No sound/Distorted)	Microphone/speaker obstruction, app settings, network latency.	Check app volume settings. Ensure nothing is covering the microphone or speaker. Verify stable internet connection.
Doorbell Ringer Not Working	Chime not paired, low battery, internal fault.	Ensure the indoor chime is powered and correctly paired with the doorbell. Recharge the doorbell. If issues persist, contact support.

## SPECIFICATIONS

- **Model:** B1
- **Brand:** LAXIHUB
- **Indoor/Outdoor Usage:** Outdoor
- **Compatible Devices:** Smartphone, Amazon Alexa, Google Assistant, Vera
- **Power Source:** Battery Powered (6700mAh Lithium Ion rechargeable battery included)
- **Connectivity Protocol:** Wi-Fi (2.4GHz only)
- **Mounting Type:** Wall Mount
- **Video Capture Resolution:** 1080p Full HD
- **Color:** Black
- **Number of Channels:** 2 (Two-way audio)
- **Frame Rate:** 25 fps
- **Material:** Plastic
- **Voltage:** 5 Volts (DC)
- **Item Dimensions (L x W x H):** 7.52 x 4.13 x 2.36 inches
- **Item Weight:** 6.72 ounces
- **Low Light Technology:** Night Color (Infrared)
- **Alert Type:** Motion Only (AI Motion Detection)
- **International Protection Rating:** IP65
- **Control Method:** App
- **UPC:** 787790682257
- **First Available:** May 22, 2020

## WARRANTY AND SUPPORT

### Warranty Information

For detailed warranty information regarding your LAXIHUB B1 Video Doorbell Camera, please refer to the warranty card included in your product packaging or visit the official LAXIHUB website. Extended protection plans may be available for purchase separately.



<p>F1 </p> <p>QUICK GUIDE</p> <p>B1 Smart Wi-Fi Floodlight Camera</p>   <p>Compatible with Amazon Alexa &amp; Google Assistant</p>	<p><a href="#">Laxihub F1 Smart Wi-Fi Floodlight Camera Quick Guide</a></p> <p>Quick guide for the Laxihub F1 Smart Wi-Fi Floodlight Camera, covering its components, introduction, installation, connection via the Arenti app, and key functions like lighting control, audio, and night vision.</p>
<p>B1 </p> <p>QUICK GUIDE</p> <p>B1 Smart Wi-Fi Video Doorbell</p>   <p>Compatible with Amazon Alexa</p>	<p><a href="#">Laxihub B1 Smart Wi-Fi Video Doorbell Quick Guide</a></p> <p>A concise guide to setting up and using the Laxihub B1 Smart Wi-Fi Video Doorbell, covering app download, device pairing, installation, live viewing, history, and troubleshooting.</p>