

[Manuals.plus](#) /

› [Pentair Everpure](#) /

› Pentair Everpure H-1200 Quick-Change Filter Cartridge Set User Manual

Pentair Everpure H-1200

Pentair Everpure H-1200 Quick-Change Filter Cartridge Set User Manual

Model: H-1200 | Part Number: EV928201

NSF Certified to Reduce Lead, PFOA/PFOS, Chlorine Taste & Odor

1. PRODUCT OVERVIEW

The Pentair Everpure H-1200 Quick-Change Filter Cartridge Set provides commercial-grade water filtration technology for your home. This system is designed to deliver reliable access to cleaner, quality drinking water by significantly reducing various contaminants.





Image: The Pentair Everpure H-1200 Quick-Change Filter Cartridge Set, showing both #1 and #2 filter cartridges.

The H-1200 system utilizes exclusive Micro-Pure filtration technology with dual-stage filtration to ensure maximum reduction of substances, protecting the pleated surface inside the cartridge. It is designed for easy installation and maintenance.

2. KEY FEATURES AND BENEFITS

- **Advanced Filtration:** Reduces particles as small as 0.5 micron, Chlorine Taste & Odor, Lead, and Volatile Organic Compounds (VOCs).

- **PFOA/PFOS Reduction:** Certified to reduce up to 98% of PFOA/PFOS "forever chemicals".
- **Cyst Reduction:** NSF/ANSI Standard 53 certified to reduce cysts like *Cryptosporidium* & *Giardia*.
- **Microplastics Reduction:** NSF/ANSI Standard 401 certified to reduce Microplastics.
- **High Capacity:** Filters 1,000 gallons of water, equivalent to 7,000 bottles of water (based on 0.5 gpm flow rate).
- **Durable Construction:** Features commercial-grade metal containers that protect from splitting or bursting, and include food-grade polymer lining.
- **Made in USA:** Pentair Everpure H-Series products are manufactured in the United States of America.



EVERPURE H-1200 SYSTEM

CERTIFIED TO REDUCE



PFOA/PFOS

System certified to reduce up to 98% of PFOA/PFOS, commonly known as "forever chemicals." *




Lead

NSF certified to reduce lead, for worry-free water.



Chlorine Taste & Odor

Effectively reduces chlorine for great-tasting water.



Cysts

NSF/ANSI Standard 53 certified to reduce cysts such as *Cryptosporidium* and *Giardia* by mechanical means.

EPA EST. NO. 002623-IL-002



System Tested and Certified by NSF International against CSA B483.1 and NSF/ANSI Standard 42 & 53 for the reduction of claims specified on the Performance Data Sheet.




*The model H-1200 is certified by the IAMPO R&T against NSF/ANSI 53 for the reduction of perfluorooctanoic acid (PFOA) and perfluorooctane sulfonate (PFOS).

Image: Graphic illustrating the contaminants reduced by the Everpure H-1200 system, including PFOA/PFOS, Lead, Chlorine Taste & Odor, and Cysts.



= 7,573 SAVED WATER BOTTLES

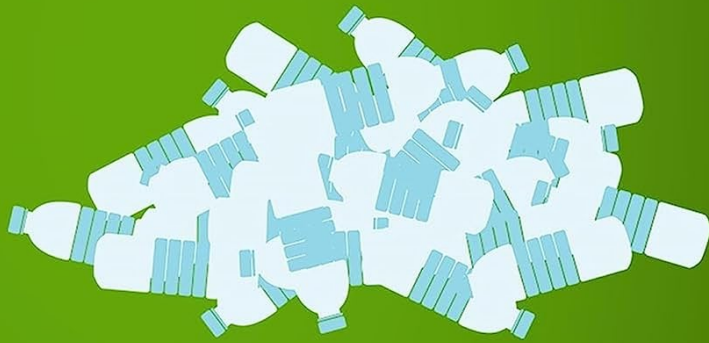

A SUSTAINABLE SOLUTION

Image: Visual representation of 7,573 saved water bottles, highlighting the environmental benefit of using the filter system.

5x THE FILTERING SURFACE AREA OF CARBON FILTERS

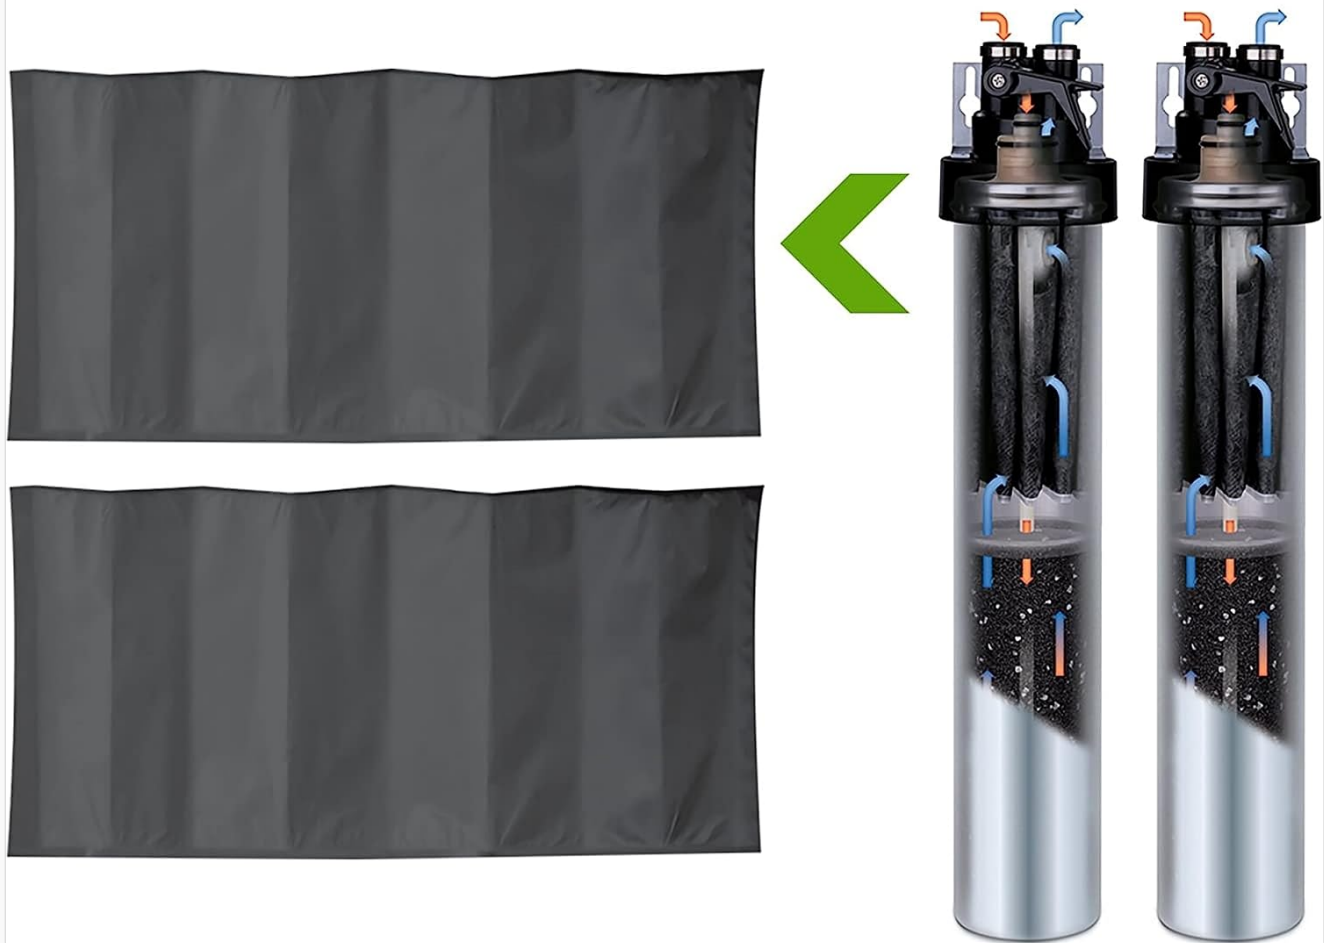


Image: Diagram showing the internal structure of the filters, emphasizing 5 times the filtering surface area compared to standard carbon filters.

H-1200

**MADE IN THE
USA**
OF FOREIGN & DOMESTIC PARTS

TWO STAGE DRINKING WATER SYSTEM



FEATURES • BENEFITS

- ◆ High-performance system certified to reduce up to 99.6% of Total PFAS**
- ◆ Exclusive Micro-Pure™ filtering material coats the pleated surface inside the cartridge
- ◆ The Pentair Everpure signature metal canister delivers commercial-grade durability
- ◆ Effectively reduces Methyl tert-butyl ether (MTBE) and lead
- ◆ Retains vital minerals found naturally in water to ensure the delicious taste of your water
- ◆ Dual-cartridge system boasts a longer lifespan compared to single-cartridge system, up to 1,000 gallons or one year

INSTALLATION TIPS

- ◆ Install vertically with cartridge hanging down.
- ◆ Use the minimum length of tubing possible.
- ◆ Space required: 15" W x 22" H x 5" D (38 W x 56 H x 13 D cm) including 2-1/2 inches of clear space under unit for cartridge change.

OPERATION TIPS

- ◆ Replace both cartridges at the same time; either when capacity is reached, or when flow becomes too slow. To ensure optimum water filtration, cartridges should be changed annually
- ◆ Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts.

INCLUDES

- ◆ Side faucet
- ◆ Installation and operation manual



Image: Overview of the H-1200 system, detailing its two-stage filtration, features, benefits, and installation tips such as vertical mounting and space requirements.

3. SETUP AND INSTALLATION

The Pentair Everpure H-1200 system is designed for straightforward installation. It is recommended to consult a qualified plumber for installation or follow the detailed instructions provided in the official user manual.

General Installation Tips:

- Install vertically with the cartridge hanging down.
- Ensure sufficient space for cartridge changes (approximately 2-1/2 inches of clear space under the unit).
- The kit includes the filters, mount, adapters, coupling devices, and water hose for a complete setup.

For comprehensive, step-by-step installation instructions, please refer to the official PDF User Manual linked in the Support & Warranty section.

4. OPERATION

Once installed, the Pentair Everpure H-1200 system operates continuously, providing filtered water on demand. Water flows through the dual-stage cartridges, which effectively reduce impurities and improve taste and odor.

The system is designed to retain vital minerals naturally found in water, ensuring a delicious taste while providing cleaner water.

5. MAINTENANCE

Regular maintenance, primarily filter cartridge replacement, is crucial to ensure the continued performance and effectiveness of your H-1200 system. Filters should be replaced approximately every 1,000 gallons or once a year, whichever comes first.

Signs for Replacement:

- Diminished water flow from your faucet or dispenser. This indicates that the activated carbon inside the filters is reaching its end of life.

Cartridge Replacement Procedure:

1. **Shut Off Water Supply:** Locate and shut off the water supply to your filter unit. Many systems have a shut-off valve for each cartridge on the unit itself.
2. **Remove Old Cartridges:** Turn each cartridge to the left as far as it can go (you will see a notch appear). Pull down to remove it. Place a towel underneath the cartridges before removal to catch any residual water.
3. **Prepare New Cartridges:** Remove the plastic wrap and the plastic cap from the top of each new cartridge.
4. **Install New Cartridges:** Insert the new cartridge with the notch aligned in the same place as the old one. Turn the cartridge to the right as far as it can go until you feel it lock securely into place.
5. **Flush System:** After both new cartridges are locked in, turn the water supply back on to the unit. Let the water run from your output (e.g., water spout, fridge dispenser) for 7-10 minutes to flush the new cartridges and remove any trapped air.

Tip: When changing filters, especially for the first time, install the first filter (#1) and flush it into a bucket before installing the second filter (#2). When replacing both, flush the new #1 into the existing #2, then replace #2.

6. TROUBLESHOOTING

Most common issues with the H-1200 system relate to water flow or taste.

Issue: Reduced Water Flow

- **Cause:** Clogged or expired filter cartridges.
- **Solution:** Replace the filter cartridges as described in the Maintenance section. Filters typically last for 1,000 gallons or one year.

Issue: Unpleasant Taste or Odor

- **Cause:** Filter cartridges have reached their capacity and are no longer effectively removing contaminants.
- **Solution:** Replace the filter cartridges.

If you experience issues not covered here, please refer to the official user manual or contact customer support.

7. SPECIFICATIONS

Attribute	Detail
Model Number	H-1200
Part Number	EV928201
Material	Alloy Steel
Product Dimensions	6"D x 6"W x 17"H
Item Weight	5.35 Pounds
Flow Rate	0.5 Gallons Per Minute
Capacity	1,000 Gallons
Micron Rating	0.5 Micron
Certifications	NSF/ANSI Standard 53, 401, WQA
Country of Origin	USA

8. SAFETY INFORMATION

California Proposition 65 Warning: This product may expose you to chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Always follow all local plumbing codes and regulations during installation and maintenance.

9. SUPPORT & WARRANTY

For detailed information, including complete installation guides, troubleshooting charts, and warranty details, please refer to the official Pentair Everpure H-1200 User Manual.

Official User Manual (PDF): [Download PDF Manual](#)

For further assistance or technical support, please visit the official Everpure website or contact their customer service.

Manufacturer: Pentair

Brand: Everpure



© 2024 Pentair Everpure. All rights reserved.

This manual is for informational purposes only. Specifications are subject to change without notice.