

UpBright MF604H, MF60S

UpBright 18V AC/DC Adapter User Manual

For Mufoli MF604H and MF60S Sound Bars

1. INTRODUCTION

This manual provides essential instructions for the safe and effective use of your UpBright 18V AC/DC Adapter. This power supply is designed to provide stable 18V DC power to compatible devices, specifically Mufoli Model MF604H (60W, 16-inch) and MF60S (80W, 20-inch) Home Theater TV Sound Bars/Speakers. Please read this manual thoroughly before using the product and retain it for future reference.

2. IMPORTANT SAFETY INSTRUCTIONS

- **Read all instructions:** Before using the adapter, read all safety and operating instructions.
- **Keep away from water:** Do not expose the adapter to rain, moisture, or extreme humidity.
- **Proper ventilation:** Ensure the adapter is placed in a well-ventilated area. Do not cover it.
- **Power source:** Connect the adapter only to the specified power source (100-240VAC, 50/60Hz).
- **Cable protection:** Protect the power cord from being walked on or pinched, particularly at plugs, convenience receptacles, and the point where they exit from the adapter.
- **Cleaning:** Unplug the adapter from the wall outlet before cleaning. Use a dry cloth for cleaning.
- **Servicing:** Do not attempt to service this product yourself. Refer all servicing to qualified service personnel.
- **Compatibility:** Use only with devices specified as compatible (Mufoli MF604H, MF60S). Using with incompatible devices may cause damage.

CAUTION: RISK OF ELECTRIC SHOCK. DRY LOCATION USE ONLY.

3. PRODUCT OVERVIEW

The UpBright 18V AC/DC Adapter is a switching power supply designed for reliable performance. It features universal input voltage compatibility (100-240VAC) and provides a stable 18V DC output at 1.3A.



Image 1: Front view of the UpBright 18V AC/DC Adapter, showing the brand logo, model information, input/output specifications, and safety certifications (FC, CE, RoHS).



Image 2: Side view of the UpBright 18V AC/DC Adapter, highlighting the compact design and the attached DC barrel connector cable.

Key Features:

- **Universal Input:** 100-240VAC, 50/60Hz for worldwide use.
- **Output:** 18V DC, 1.3A (1300mA).
- **Protection:** OVP (Over Voltage Protection), OCP (Over Current Protection), SCP (Short Circuit Protection).
- **Compatibility:** Specifically designed for Mufoli MF604H and MF60S sound bars.

4. SETUP INSTRUCTIONS

Follow these steps to properly set up your UpBright AC/DC Adapter:

1. **Verify Compatibility:** Ensure your device requires an 18V DC power supply with a current draw of 1.3A or less, and has a compatible barrel connector. This adapter is specifically for Mufoli MF604H and MF60S sound bars.
2. **Inspect the Adapter:** Before connecting, visually inspect the adapter and its cable for any signs of damage. Do not use if damaged.
3. **Connect to Device:** Insert the DC barrel connector of the adapter firmly into the power input port of your Mufoli

sound bar.

4. **Connect to Power Outlet:** Plug the AC prongs of the adapter into a standard wall power outlet (100-240VAC).
5. **Power On Device:** Once connected, you can power on your sound bar according to its own instructions.

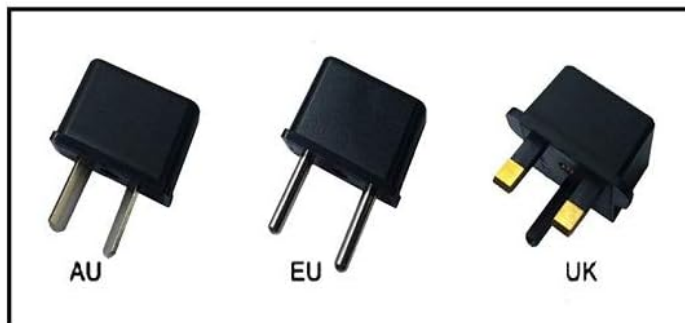


Image 3: The UpBright 18V AC/DC Adapter with its integrated power cord and barrel connector, ready for connection to a compatible device.

International Use (if applicable):

If using the adapter in a region with different plug types, ensure you use a suitable outlet adapter. The UpBright adapter supports worldwide input voltage (100-240V).

Come With A Suitable Outlet Adapter (Only One) to Fit Your Country/Area For International Order



THIS PRODUCT COMES WITH A UPBRIGHT®

LIMITED WARRANTY CERTIFICATE
+ UPBRIGHT® LIMITED WARRANTY



Image 4: Examples of international plug adapters (AU, EU, UK types) that may be required for use in different countries, alongside a representation of the UpBright Limited Warranty Certificate.

5. OPERATING INSTRUCTIONS

Once the adapter is correctly connected to your Mufoli sound bar and a power outlet, it will supply continuous power. The adapter operates automatically and does not require user intervention during normal operation.

- Ensure the sound bar's power indicator lights up, confirming it is receiving power.
- Avoid disconnecting the adapter from the wall outlet by pulling the cord. Always grasp the adapter body.
- If the sound bar is not in use for an extended period, it is recommended to unplug the adapter from the wall outlet.

6. MAINTENANCE AND CARE

- **Cleaning:** Disconnect the adapter from the power source and the device before cleaning. Use a soft, dry cloth to wipe the surface. Do not use liquid cleaners or aerosol sprays.
- **Storage:** When not in use, store the adapter in a cool, dry place, away from direct sunlight and extreme temperatures. Avoid wrapping the cable too tightly around the adapter.
- **Inspection:** Periodically check the adapter and cable for any signs of wear, cuts, or damage. If damage is found, discontinue use immediately and replace the adapter.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution
No power to device	Adapter not plugged in; faulty outlet; loose connection; damaged adapter.	Ensure adapter is fully plugged into a working outlet. Check connections. Inspect adapter for damage. Try a different outlet.

Problem	Possible Cause	Solution
Device not turning on	Incorrect adapter voltage/current; device issue; adapter issue.	Verify adapter specifications match device requirements. Test adapter with another compatible device if possible. Consult device manual.
Adapter feels hot	Normal operation (slight warmth); excessive load; poor ventilation.	A slight warmth is normal. Ensure adequate ventilation around the adapter. If excessively hot, unplug immediately and contact support.

8. PRODUCT SPECIFICATIONS

Feature	Detail
Brand	UpBright
Model Compatibility	Mufoli MF604H (60W, 16-inch), Mufoli MF60S (80W, 20-inch) Sound Bars
Input Voltage	100-240VAC, 50/60Hz
Output Voltage	18V DC
Output Current	1.3A (1300mA)
Power Output	23.4W (18V * 1.3A)
Connector Type	Barrel Connector
Protection Features	OVP, OCP, SCP
Product Dimensions	10.16 x 7.62 x 5.08 cm
Item Weight	141.75 g

9. WARRANTY AND SUPPORT

Your UpBright AC/DC Adapter comes with the following warranty and support:

- **Refund Policy:** 30 days refund from the date of purchase.
- **Exchange Policy:** 24 months exchange for defective units.

For technical support or warranty claims, please refer to the contact information provided with your purchase or visit the official UpBright website.

Note: Warranty terms are subject to change. Please refer to the official warranty certificate included with your product for the most current information.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0D93B3H74>

More documents and user manuals: <https://manuals.plus/>