

[Manuals.plus](#) /

› [Fanbulous](#) /

› Fanbulous 65-Inch Brushed Nickel Ceiling Fan with Light and Remote Control User Manual

Fanbulous F-TY65SN-1D01

Fanbulous 65-Inch Brushed Nickel Ceiling Fan User Manual

Model: F-TY65SN-1D01

1. SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate, or install the product. Failure to follow these instructions could result in electric shock, fire, or serious personal injury.

- Ensure all electrical connections comply with local codes, ordinances, and the National Electrical Code (NEC).
- Consult a qualified electrician if you are unfamiliar with wiring methods.
- Turn off power at the circuit breaker before installation or servicing.
- Do not install the fan in a location where blades could strike objects or people.
- The mounting structure must be capable of supporting the fan's weight (approximately 18 lbs).

2. PACKAGE CONTENTS

Verify that all components are present before beginning installation.

- Ceiling Fan Motor Assembly
- Fan Blades (8)
- Downrods (6", 12", 20")
- Mounting Bracket
- Remote Control with Wall Cradle
- Hardware Bags (screws, wire nuts, etc.)
- LED Light Kit

3. SETUP AND INSTALLATION

This section provides general guidance for installing your Fanbulous ceiling fan. Professional installation is recommended.

3.1 Choosing a Mounting Location

The fan is suitable for indoor and covered outdoor use (not exposed to direct rain). It is ideal for rooms up to 20ft x 20ft.

Ensure there is at least 7 feet of clearance from the floor to the fan blades.

3.2 Downrod Selection


Select the appropriate downrod length for your ceiling height:

- **6-inch downrod:** For ceilings up to 8 feet high.
- **12-inch downrod:** Standard length for most installations.
- **20-inch downrod:** For ceilings 10 feet or higher, or to enhance air circulation.

The fan can also be angle-mounted on sloped ceilings up to a maximum of 15 degrees.

Fanbulous

65 Inch Large Ceiling Fan

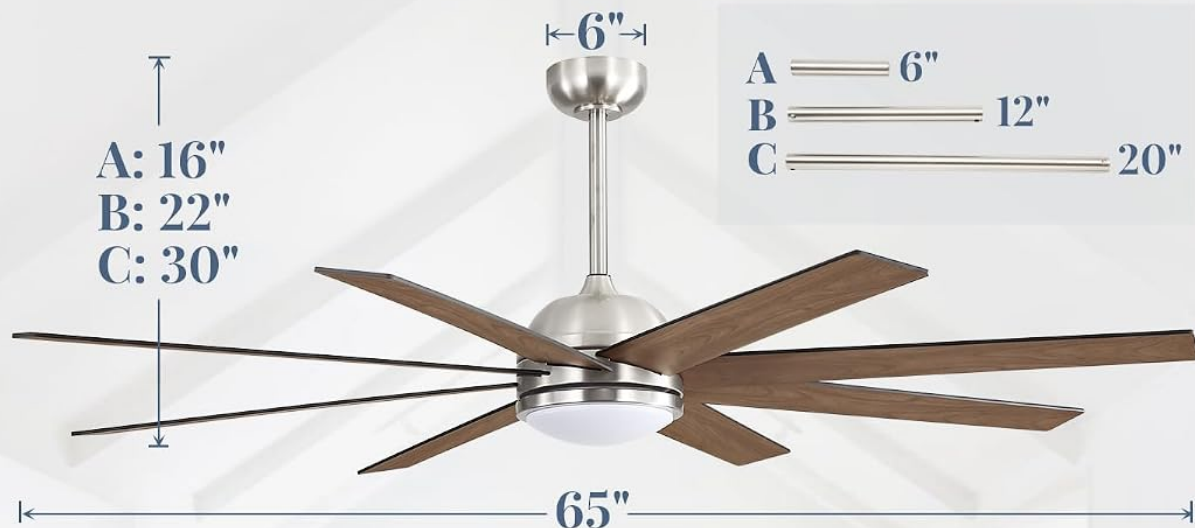

Mounting Options

Great Room: 20 x 20FT



Low Ceiling



High Ceiling



Slanted Ceiling($\leq 15^\circ$)

Figure 1: Fan dimensions and downrod options for various ceiling types.

3.3 Blade Assembly

The fan blades feature two colors: a classic walnut finish on one side and a gray wood tone on the other. Choose the desired color before attaching the blades to the motor housing using the provided hardware.

2-Colors in One Blade

Suitable for variety decoration styles



Figure 2: Reversible fan blades with gray wood and walnut finishes.

3.4 Wiring and Mounting

Follow the detailed wiring diagrams provided in the separate installation guide. Ensure all connections are secure and properly insulated. Mount the fan assembly to the ceiling junction box according to the instructions.

4. OPERATING INSTRUCTIONS

Your Fanbulous ceiling fan is controlled by the included remote control.

4.1 Remote Control Functions

The remote control allows you to manage all fan and light settings. It can be used as a handheld remote or mounted in the included wall cradle.



Slilent Remote Control







6 Wind Speeds



3 Color Temperature Adjustable



Reversible DC Motor



Timer Setting 1/4/8 Hours



Natural Wind



Figure 3: Remote control layout and functions.

- **Power Button:** Turns the fan and light on/off.
- **Fan Speed (1-6):** Adjusts the fan speed from low (1-2) to high (5-6).
- **Light On/Off:** Toggles the LED light.
- **Color Temperature (CCT) Adjustment:** Cycles through 3000K (warm white), 4500K (natural white), and 6500K (cool white).
- **Reversible Mode:** Changes the direction of blade rotation for summer (downward airflow) or winter (upward airflow) use.
- **Timer Settings (1H/4H/8H):** Sets the fan to turn off automatically after 1, 4, or 8 hours.
- **Mute Button:** Silences the remote control's beeping sounds.

Fanbulous

3-Color Temperature

Meet the light demand in different scenarios



Figure 4: Demonstrating 3-color temperature options.

4.2 Light Memory Function

The LED light features a memory function. If you turn off the light and wait approximately 10 seconds before turning it back on, it will recall your last selected color temperature setting.

4.3 Quiet Operation

The DC motor operates at low noise levels (below 35dB), ensuring a quiet environment.

Fanbulous

Quiet Enjoyment

1H/4H/8H Timer Setting

1H 4H 8H

⏻

Timer



10dB



Flower Sound

25dB



Library

35dB



Our Fan

45dB



Whisper

55dB



Crowded Street

Figure 5: Noise level comparison for quiet enjoyment.

4.4 Official Product Video

Your browser does not support the video tag.

Video 1: An overview of the Fanbulous large ceiling fan, demonstrating its features and operation. Note: This video may feature a 72-

inch model, but the functions are similar to the 65-inch model.

5. MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your ceiling fan.

- **Cleaning:** Periodically wipe the fan blades and motor housing with a soft, damp cloth. Do not use abrasive cleaners or solvents.
- **Blade Tightness:** Check blade screws annually to ensure they are secure. Loose blades can cause wobbling and noise.
- **Light Cover:** Clean the light cover gently with a soft cloth to maintain light output.
- **No Lubrication Needed:** The DC motor is permanently lubricated and does not require additional oiling.

6. TROUBLESHOOTING

Before contacting customer support, refer to the following common issues and solutions:

Problem	Possible Cause	Solution
Fan does not start	No power to the fan; Loose wire connections; Remote control battery low or not paired.	Check circuit breaker; Ensure all wiring is secure; Replace remote battery or re-pair remote (refer to remote pairing instructions in the full manual).
Light does not work	Loose wire connection to light kit; LED driver failure; Remote control issue.	Check light kit wiring; Contact customer support if LED driver is suspected; Verify remote functionality.
Fan wobbles	Loose blade screws; Unbalanced blades; Loose mounting bracket.	Tighten all blade screws; Use a balancing kit (not included) if necessary; Ensure mounting bracket is securely fastened to the junction box.
Remote not responding	Low battery; Not paired with fan; Interference.	Replace remote battery; Re-pair remote with the fan (consult full manual for pairing steps); Ensure no strong interference sources are nearby.

7. SPECIFICATIONS

Feature	Detail
Brand	Fanbulous
Model Number	F-TY65SN-1D01
Size	65 Inch Diameter
Color	Brushed Nickel
Motor Type	Quiet Reversible DC Motor
Number of Blades	8
Light Type	Integrated LED
Color Temperature (CCT)	3000K, 4500K, 6500K (Adjustable)
Light Brightness	2000 Lumens

Feature	Detail
Wattage	65 watts
Control Method	Remote Control
Number of Speeds	6
Indoor/Outdoor Usage	Covered Outdoor (not exposed to direct rain)
Product Dimensions (D x W x H)	65"D x 65"W x 15.8"H
Item Weight	18 Pounds

8. WARRANTY AND SUPPORT

8.1 Warranty Information

Fanbulous provides a **5-year warranty** on the motor and a **2-year warranty** on all other parts of this ceiling fan. This warranty covers defects in materials and workmanship under normal use.

8.2 Customer Support

If you encounter any problems with your product or have questions regarding installation, operation, or warranty claims, please contact Fanbulous customer service. Refer to the contact information provided with your purchase or on the official Fanbulous website for assistance.