

Edifier M60

Edifier M60 Multimedia Speaker User Manual

Model: M60

INTRODUCTION

The Edifier M60 Multimedia Speaker system offers a premium audio experience with its compact design and powerful output. Engineered for desktop environments, these speakers deliver Hi-Res Audio through both wired and wireless connections, including Bluetooth 5.3 with LDAC support. This manual provides comprehensive instructions for setting up, operating, and maintaining your M60 speakers to ensure optimal performance.



KEY FEATURES

- **Compact and Delicate Design:** Each speaker measures 100mm (W) x 168mm (H) x 147 mm (D), designed to fit seamlessly into any desktop setup.



Figure 2: Compact Design of Edifier M60 Speakers on a Desktop

- **Powerful Output:** Total 66W RMS power (18W+18W mid-low, 15W+15W treble) with 1" silk dome tweeters and 3" long-throw aluminum diaphragm mid-low drivers. Features a high-efficiency closed-loop Class-D audio amplifier.

POWERFUL OUTPUT

66W RMS power delivers big, robust sound
in a compact size

1" Silk Dome Tweeters

3" Mid-low Drivers



Figure 3: Internal Components of the M60 Speaker

- **High-Quality Audio Processing:** Full digital processing, Class-D amplification, and Hi-Res Audio certification for both wired and wireless transmission. Includes precise two-way active crossover and dynamic range control via a built-in DSP.

PREMIUM AUDIO PROCESSING

Class-D amplifier and build-in DSP for
precision sound

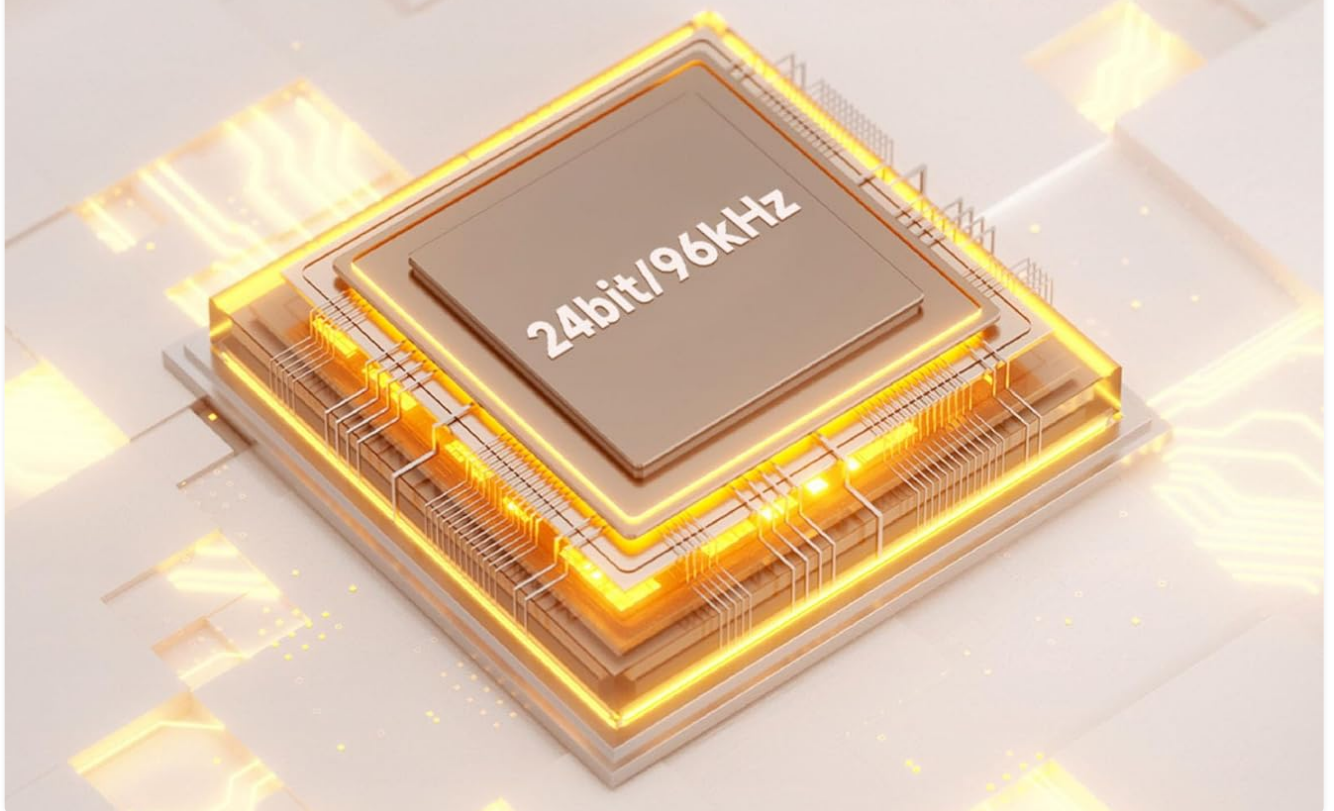


Figure 4: High-Resolution Audio Processing

- **Multiple Inputs:** Versatile connectivity options including Bluetooth V5.3 for wireless streaming, USB-C, and AUX inputs for wired connections.

VERSATILE INPUTS AND BLUETOOTH V5.3

Seamless Connectivity with USB-C, AUX,
and Bluetooth V5.3



Figure 5: Connectivity Ports (AUX, USB-C, Bluetooth)

- **Bluetooth 5.3 Connectivity:** The Bluetooth V5.3 audio receiver supports the LDAC codec, allowing high-resolution audio streaming up to 24-bit/96kHz from compatible Android devices.
- **User-Friendly Control:** Features a cap-sensitive touch panel with an automatic backlight that activates upon hand approach. Extended functions are available via the EDIFIER ConneX mobile app.

USER-FRIENDLY CONTROLS

Auto-backlit touch panel for easy touch
and swipe control



Figure 6: Touch Controls on Top Panel

EDIFIER CONNEX APP

Unlock enhanced features with EDIFIER ConneX app to customize sound effects, backlight settings, etc.



Figure 7: EDIFIER ConneX Mobile App Interface

- **Aluminum Speaker Stands Bundled:** Includes a pair of aluminum speaker stands designed at a 15-degree angle to reduce sound distortion by directing audio directly to ear level.

SPEAKER STANDS INCLUDED

Aluminum stands reduce sound coloration and direct sound at a 15-degree angle for optimal listening.



Figure 8: Speaker on Aluminum Stand

SETUP GUIDE

1. Unpacking and Contents

Carefully remove all components from the packaging. The box should contain:

- Edifier M60 Multimedia Speakers (Left and Right)
- Aluminum Speaker Stands (2)
- Power Cable
- USB-C to USB-C Cable
- 3.5mm AUX Cable

- Speaker Connection Cable (4-pin)
- User Manual (this document)

2. Speaker Placement

Place the speakers on a stable, flat surface, ideally at ear level when seated. The included aluminum stands are designed to angle the speakers upwards by 15 degrees, optimizing sound projection for desktop use. Ensure there is adequate space behind the speakers for cable connections and proper ventilation.

MODERN SIMPLIFIED DESIGN

The speaker minimizes desktop space while its sleek design enhances home aesthetics with artistic elegance.



Figure 9: Speaker Dimensions for Optimal Placement

3. Connecting the Speakers

1. Connect the left and right speakers using the provided 4-pin speaker connection cable. This cable connects the

active (right) speaker to the passive (left) speaker.

2. Connect the power cable to the active speaker and then to a power outlet.

3. Choose your preferred audio input:

- **USB-C:** Connect the USB-C cable from your computer to the USB-C input on the active speaker. This utilizes the speaker's built-in DAC for high-quality digital audio.
- **AUX:** Connect the 3.5mm AUX cable from your audio source (e.g., smartphone, tablet, turntable) to the AUX input on the active speaker.
- **Bluetooth:** For wireless connection, ensure no wired inputs are active. The speaker will automatically enter Bluetooth pairing mode when no wired source is detected.

Your browser does not support the video tag.

Video 1: Edifier M60 Bluetooth Speaker Overview and Setup. This video demonstrates the physical connections and initial setup of the Edifier M60 speakers, including power and audio input options.

OPERATING INSTRUCTIONS

1. Power On/Off

To power on or off the speakers, press and hold the power icon on the cap-sensitive touch panel located on top of the active (right) speaker for a few seconds.

2. Input Selection

Tap the power icon on the touch panel to cycle through the available input sources: Bluetooth (blue LED), USB-C (green LED), and AUX (red LED). The LED indicator will change color to reflect the active input.

3. Volume Control

Adjust the volume by swiping your finger across the touch panel. The backlight will illuminate to show the volume level and then dim automatically.

4. Bluetooth Pairing

When Bluetooth input is selected and no device is connected, the speaker will automatically enter pairing mode (blue LED blinking). On your device, search for "EDIFIER M60" in the Bluetooth settings and select it to pair. Once connected, the blue LED will remain solid.

5. EDIFIER ConneX App

Download the EDIFIER ConneX mobile app from your device's app store for enhanced control and customization options, including sound effects and backlight settings.

MAINTENANCE

To ensure the longevity and optimal performance of your Edifier M60 speakers, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to wipe the speaker surfaces. Avoid using abrasive cleaners, waxes, or solvents as they may damage the finish.
- **Dust Protection:** Keep the speakers free from dust accumulation. You may use a soft brush or a vacuum cleaner with a brush attachment for grilles and crevices.
- **Environment:** Avoid placing speakers in direct sunlight, near heat sources, or in areas with high humidity. Ensure

proper ventilation around the speakers.

- **Handling:** Handle the speakers with care. Avoid dropping them or subjecting them to strong impacts.

TROUBLESHOOTING

Problem	Possible Cause	Solution
No sound from speakers.	Power cable not connected securely. Incorrect input source selected. Volume too low or muted. Speaker connection cable loose.	Ensure power cable is firmly inserted into the speaker and wall outlet. Tap the touch panel to cycle through inputs and select the correct one (Bluetooth, USB-C, AUX). Increase volume using the touch panel or connected device. Check the 4-pin cable connecting the left and right speakers.
Bluetooth connection issues.	Speakers not in pairing mode. Device too far from speakers. Interference from other devices.	Ensure Bluetooth input is selected and the blue LED is blinking. Move your device closer to the speakers (within 10 meters). Turn off other Bluetooth devices or move them away. Try unpairing and re-pairing the device.
Speakers do not automatically switch input sources.	This is expected behavior; manual input selection is required.	Manually select the desired input source by tapping the touch panel.
Power plug feels loose.	Design of the power connector.	Ensure the power plug is fully inserted. While it may not have a tight "click" fit, it should make proper electrical contact. Avoid unnecessary movement of the speaker once connected.

SPECIFICATIONS

Feature	Detail
Model Name	M60
Speaker Type	Bookshelf
Speaker Maximum Output Power	66 Watts RMS
Connectivity Technology	Bluetooth, USB-C, AUX
Bluetooth Version	V5.3 (supports LDAC)
Product Dimensions (per speaker)	3.93"D x 6.61"W x 5.78"H (100mm x 168mm x 147mm)
Item Weight	6.75 pounds (3.07 Kilograms)
Tweeter Diameter	1 Inch

Feature	Detail
Mid-low Driver Size	3 Inches
Signal-to-Noise Ratio	85 dB
Control Method	Touchpad
Included Components	Aluminum Speaker Stands
Manufacturer	Edifier

WARRANTY AND SUPPORT


Edifier products are designed and manufactured to the highest quality standards. For warranty information specific to your region and product, please refer to the warranty card included with your purchase or visit the official Edifier website. For technical support, troubleshooting assistance, or service inquiries, please contact Edifier customer support through their official channels.

You can find more information and support resources on the [Edifier Store on Amazon](#).




© 2025 Edifier. All rights reserved.

Related Documents - M60

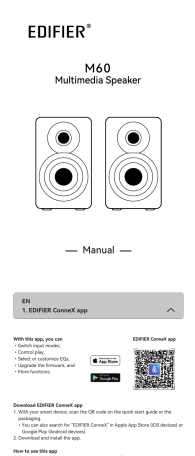
	M60-6 Customer Display and Printer Dock Specifications Technical specifications for the M60-6 customer display and printer dock, including interface details, connectivity, paper size, printing speed, audio output, display resolution, and adapter specifications.
	Edifier M60 White Multimedia Speaker User Manual This manual provides instructions for setting up and using the Edifier M60 White multimedia speaker, including Bluetooth and USB connections, app integration, and troubleshooting.
	

2. What's in the box?




Note:
- Images are for illustrative purposes only and may differ from the actual product.
- The provided USB connecting cables for audio streaming only. Do not use it for power or plug.
- For the need of technical improvement and system upgrade, information and specifications are subject to change without prior notice. If any difference is found, the actual product prevails.

3. Cable connection




Note:
- Power input: 100-240V~50/60Hz, 50W.
- Plug type varies based on the region.

4. Standby & wake-up




Note:
- To switch the speaker to standby mode or wake mode, tap and hold the "Q" button on the speaker.

5. Source selection




6. Bluetooth connection

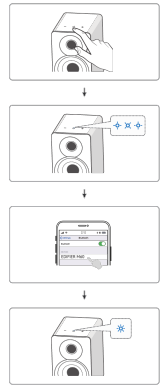


Note:
- The mode for connection is "BT" if needed.
- To enjoy all Bluetooth functions of this product, make sure that your audio device supports A2DP and AVRCP profiles.
- If the device is not connected to the speaker, the speaker will enter the Bluetooth standby mode. The "Q" button (highlighted) will be a flashing pattern in this mode. If the device cannot find the speaker, tap and hold the "Q" button on the speaker for 5 seconds to restart the pairing process. In the pairing process of this speaker, you can select "EDIFIER M60" from the Bluetooth device list to connect. To add more Bluetooth devices, tap the "Q" button on the speaker.
- To disconnect from the current Bluetooth device, tap and hold the "Q" and "Q" buttons on the speaker for 15 seconds.

7. USB connection



Note:
- The following operating systems support USB audio streaming: Windows 11, Windows 10, Windows 8, and Windows 7.

8. Play control









Note:
- In AUX and USB modes, volume can be controlled by the volume buttons on the speaker and your device separately.


9. Specifications

Total output power: 2x40W, L/R (Dolby Digital 150W+150W)
L/R (Bass range and treble): 100W+100W
Frequency response: 80Hz~20kHz
Impedance (for L/R):
Impedance (for L/R): 4Ω/8Ω
RF Power Output: <10 dBm EIRP

Edifier M60 Multimedia Speaker User Manual

Get detailed instructions on setting up and using your Edifier M60 multimedia speakers. Learn about Bluetooth and USB connectivity, app features, playback controls, troubleshooting, and specifications.

There is no restriction of use. 10. Troubleshooting Connect correct to your Bluetooth device - Make sure that the distance between this product and your Bluetooth device is less than 10 meters and there is no obstacle between them. - Make sure that the device is connected to this product via Bluetooth. - Make sure that this product is in Bluetooth pairing mode. If not, manually switch it to this state. Reset this product, enable Bluetooth function on your Bluetooth device, and then try again. No power - Make sure that the power cable is properly connected. - Make sure that the power supply is not disconnected. No sound - Make sure that this product is powered on. - Make sure that this product and your device is properly connected. - Make sure that the playback is not paused. - Make sure that this product and your device are not muted. - Increase the volume of this product and your device. Noise coming from speakers EDIFIER speakers generate little noise, while the background noise of some audio devices are too high. Please adjust audio cables and turn the volume up. If no sound can be heard at 1 meter away from the speaker, there is no problem with this product. To learn more about EDIFIER, please visit www.edifier.com. For EDIFIER warranty policies, please visit the relevant country page on www.edifier.com and review the section Global Warranty Terms, USA and Canada: www.edifier.com. South America: Please visit www.edifier.com (English) or www.edifier.com (Spanish/Portuguese) for local contact information.	
EDIFIER® M60 Multimedia Speaker  — Manual — EN 1. EDIFIER ConneX app With this app, you can - Search speaker models. - Control play. - Select or customize EQs. - Upgrade the firmware, and - More functions.  Download EDIFIER ConneX app 1. Visit our smart device scan the QR code on this quick start guide or the packaging. * You can also search for "EDIFIER ConneX" in Apple App Store (iOS) download or Google Play (Android) download. 2. Download and install the app. How to use the app 1. Connect your smart device with the speaker via Bluetooth. 2. In Bluetooth mode, open EDIFIER ConneX app on your smart device. 3. Tap the icons for settings and playback control. Note: The Bluetooth connection between your smart device and the speaker remains active even if the speaker is switched to non-Bluetooth input mode. 2. What's in the box?  Note: - Images are for illustrative purpose only and may differ from the actual product. - The standard color connecting ports is for audio connecting only. Do not use it for device charging. - For the need of product improvement and system upgrade, information and specifications contained herein may be slightly different from actual product. - If any difference is found, the actual product prevails. 3. Cable connection  Note: - Please input 100-240V~50/60Hz voltage. - This plug type is used for illustrative purpose only. 4. Standby & wake-up  Note: To switch the speaker to standby mode or wake mode, tap and hold the "S" button on the speaker. 5. Source selection  6. Bluetooth connection 	EDIFIER M60 Multimedia Speaker User Manual Comprehensive user manual for the EDIFIER M60 multimedia speaker, covering setup, connections, features, troubleshooting, and specifications. Learn how to use the EDIFIER ConneX app for enhanced control.



— Manual —

EN

1. EDIFIER ConneX app

With this app, you can

- Switch input modes,
- Control play,
- Select or customize EQs,
- Upgrade the firmware, and
- More functions.



EDIFIER ConneX app



Download EDIFIER ConneX app

1. With your smart device, scan the QR code on the quick start guide or the packaging.
 - You can also search for "EDIFIER ConneX" in Apple App Store (iOS devices) or Google Play (Android devices).
2. Download and install the app.

How to use this app

1. Connect your smart device with the speaker via Bluetooth.
 2. In Bluetooth mode, open EDIFIER ConneX App on your smart device.
 3. Tap the menu for settings and playback control.
- Note: The BLE connection between your smart device and the speaker remains active even if the speaker is switched to non-Bluetooth input modes.


2. What's in the box?



Passive speaker



Active speaker



Power cable




Speaker connecting cable




3.5mm to 3.5mm audio cable



3.5mm to RCA audio cable



USB-C to USB-C cable



Speaker stands




Quick start guide



Important safety instructions

- Note:
- Images are for illustrative purpose only and may differ from the actual product.
 - The bundled USB connecting cable is for audio streaming only. Do not use it for device charging.
 - For the need of technical improvement and system upgrade, information and specifications contained herein may be slightly different from actual product. If any difference is found, the actual product prevails.

3. Cable connection




- Note:
- Power input: 100-240V~ 50/60Hz 400mA
 - This plug type is meant for illustration purpose only.

4. Standby & wake-up




Note:
To switch the speaker to standby mode or work mode, tap and hold the "O" button on the speaker.

5. Source selection




6. Bluetooth connection

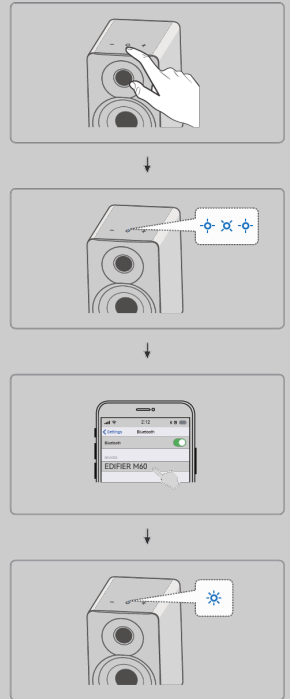


- Note:**
- Pin code for connection is "0000" if needed.
 - To enjoy all Bluetooth functions of this product, make sure that your audio source device supports A2DP and AVRCP profiles.
 - If no device is connected in 10 minutes, the speaker will switch to Bluetooth hidden mode. The "O" button backlight will be in a breathing pattern. In this mode, (1) new devices cannot find the speaker, but (2) for a device that exists in the pairing record of this speaker, you can select "EDIFIER M60" from its Bluetooth device list to reconnect. To exit from Bluetooth hidden mode, tap the "O" button on the speaker.
 - To disconnect from the current Bluetooth device, tap and hold the "O" and "-" buttons on the speaker for 1.5 seconds.

7. USB connection



Note:
The following operating systems support USB audio streaming: Windows 11, Windows 10, Windows 8, and Windows 7.

8. Play control



[EDIFIER M60 Multimedia Speaker User Manual](#)

Comprehensive user manual for the EDIFIER M60 multimedia speaker, covering setup, connections, features, troubleshooting, and specifications. Learn how to use the EDIFIER ConneX app for enhanced control.

lang:en score:34 filesize: 1017.97 K page_count: 7 document date: 2024-09-14

Note:

In AUX and USB modes, volume sync is not supported. To adjust the volume, adjust on the speaker and your device separately.

9. Specifications

Total output power (RMS): L/R (Treble): 15W+15W

L/R (Mid-range and bass): 18W+18W

Frequency response: 58Hz-40kHz

Declaration for EU

Frequency Band: 2.402GHz ~ 2.480GHz

RF Power Output: ≤ 10 dBm (ERP)

There is no restriction of use.

10. Troubleshooting

Cannot connect to your Bluetooth device

• Make sure that the distance between this product and your Bluetooth device is less than 10 meters and there are no obstacles between them.

• Make sure that no device is connected to this product via Bluetooth.

• Make sure that this product is in Bluetooth pairing mode. If not, manually switch it to this mode.

• Restart this product, enable Bluetooth function on your Bluetooth device, and then try again.

No power

• Make sure that the power cable is properly connected.

• Make sure that the power supply is not disconnected.

No sound

• Make sure that this product is powered on.

• Make sure that this product and your device is properly connected.

• Make sure that the playback is not paused.

• Make sure that this product and your device are not muted.

• Increase the volume of this product and your device.

Noise coming from speakers

• EDIFIER speakers generate little noise, while the background noise of some audio devices are too high. Please unplug audio cables and turn the volume up. If no sound can be heard at 1 meter away from the speaker, there is no problem with this product.

To learn more about EDIFIER, please visit [www.edifier.com](#)

For EDIFIER warranty queries, please visit the relevant country page on [www.edifier.com](#) and review the section titled Warranty Terms.

USA and Canada: [service@edifier.ca](#)

South America: Please visit [www.edifier.com](#) (English) or [www.edifierla.com](#) (Spanish/Portuguese) for local contact information.

[Edifier M60 White Multimedia Speaker User Manual](#)

This manual provides instructions for setting up and using the Edifier M60 White multimedia speaker, including Bluetooth and USB connections, app integration, and troubleshooting.

lang:en score:30 filesize: 1.13 M page_count: 8 document date: 2025-01-29

- With this app, you can**
- Switch input modes,
 - Control play,
 - Select or customize EQs,
 - Upgrade the firmware, and
 - More functions.



EDIFIER ConneX app



Download EDIFIER ConneX app

1. With your smart device, scan the QR code on the quick start guide or the packaging.
- You can also search for "EDIFIER ConneX" in Apple App Store (iOS devices) or Google Play (Android devices).
2. Download and install the app.

How to use this app

1. Connect your smart device with the speaker via Bluetooth.
2. In Bluetooth mode, open EDIFIER ConneX App on your smart device.
3. Tap the menu for settings and playback control.

Note: The BLE connection between your smart device and the speaker remains active even if the speaker is switched to non-Bluetooth input modes.

2. What's in the box?



Passive speaker




Active speaker




Power cable




Speaker connecting cable



3.5mm to 3.5mm audio cable



3.5mm to RCA audio cable



USB-C to USB-C cable



Speaker stands




Quick start guide



Important safety instructions


- Note:**
- Images are for illustrative purpose only and may differ from the actual product.
 - The bundled USB connecting cable is for audio streaming only. Do not use it for device charging.
 - For the need of technical improvement and system upgrade, information and specifications contained herein may be slightly different from actual product. If any difference is found, the actual product prevails.

3. Cable connection




- Note:**
- Power input: 100-240V~ 50/60Hz 400mA
 - This plug type is meant for illustration purpose only.

4. Standby & wake-up



- Note:**
- To switch the speaker to standby mode or work mode, tap and hold the "⏻" button on the speaker.


5. Source selection



Get detailed instructions on setting up and using your Edifier M60 multimedia speakers. Learn about Bluetooth and USB connectivity, app features, playback controls, troubleshooting, and specifications.


lang:en score:25 filesize: 1017.97 K page_count: 7 document date: 2024-09-14

6. Bluetooth connection

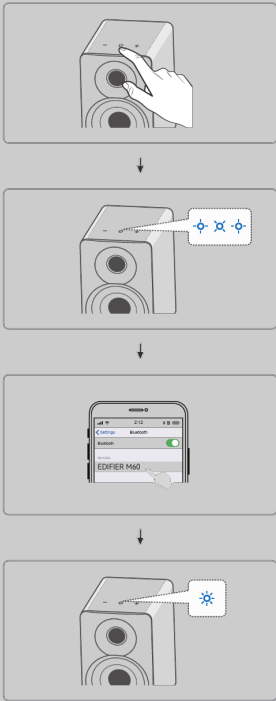


- Note:**
- Pin code for connection is "0000" if needed.
 - To enjoy all Bluetooth functions of this product, make sure that your audio source device supports A2DP and AVRCP profiles.
 - If no device is connected in 10 minutes, the speaker will switch to Bluetooth hidden mode. The "O" button backlight will be in a breathing pattern. In this mode, (1) new devices cannot find the speaker, but (2) for a device that exists in the pairing record of this speaker, you can select "EDIFIER M60" from its Bluetooth device list to reconnect. To exit from Bluetooth hidden mode, tap the "O" button on the speaker.
 - To disconnect from the current Bluetooth device, tap and hold the "O" and "-" buttons on the speaker for 1.5 seconds.

7. USB connection



- Note:**
- The following operating systems support USB audio streaming: Windows 11, Windows 10, Windows 8, and Windows 7.

8. Play control




- Note:**
- In AUX and USB modes, volume sync is not supported. To adjust the volume, adjust on the speaker and your device separately.

9. Specifications

Total output power (RMS): L/R (Treble): 15W+15W
L/R (Mid-range and bass): 18W+18W

Frequency response: 58Hz-40kHz

Declaration for EU
Frequency Band: 2.402GHz ~ 2.480GHz
RF Power Output: ≤ 10 dBm (EIRP)
There is no restriction of use.

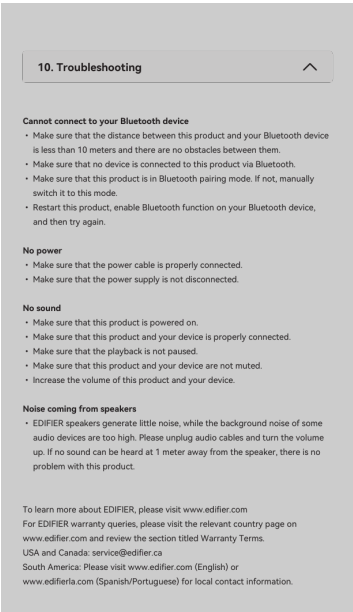

[pdf] Confidentiality Request Letter

EDIFIER M60 GTM Deck 010384 dot media gr Product |||

EDIFIER **M60** GTM Deck Corporate Confidential Version 01 2024/09/05

www.edifier.com EDIFIER Product Deck M series speakers Corporate Confidential

www.edifier.com EDIFIER Product Deck M series speakers Corporate Confidential

www.edifier.com EDIFIER Product Deck M series speakers Corpo...

lang:en score:25 filesize: 2.38 M page_count: 18 document date: 2025-02-27



[pdf] User Manual Quick Start Guide Installation Guide Instructions Guide

EDIFIER M60 BLACK087e54c0c57d5d504dfe46944056598aa3d474dafc darty notices 8 7 e

087e54c0c57d5d504dfe46944056598aa3d474da |||

MANUEL EDIFIER **M60** BLACK NOTICE D UTILISATION Tous nos Tutos vido

Darty.com Tous nos magasins Communaut SAV Darty **M60** Multimedia Speaker

Manual EN 1. EDIFIER ConneX app With this app, you can Switch input modes,

Control play, Select or customize EQs, Upgrade the firmware, and More functions....

lang:en score:25 filesize: 1.13 M page_count: 8 document date: 2025-01-29



[pdf] User Manual Quick Start Guide Installation Guide Instructions Guide

EDIFIER M60 CLASSIC OAK557e3c8ff85e10722a19eb1cfe0868b7513d16d5fc darty notices 5 7 e 557e3c8ff85e10722a19eb1cfe0868b7513d16d5 |||

MANUEL EDIFIER **M60** CLASSIC OAK NOTICE D UTILISATION Tous nos Tutos vido Darty.com Tous nos magasins Communaut SAV Darty **M60** Multimedia Speaker Manual EN 1. EDIFIER ConneX app With this app, you can Switch input modes, Control play, Select or customize EQs, Upgrade the firmware, and More func... lang:en score:24 filesize: 1.13 M page_count: 8 document date: 2025-01-29



Edifier M60 Multimedia Speaker EU Declaration of Conformity

This document is the EU Declaration of Conformity for the Edifier M60 Multimedia Speaker, model EDF100074. It details compliance with Radio Equipment Directive 2014/53/EU and RoHS Directive, referencing relevant harmonized standards. lang:en score:20 filesize: 590.89 K page_count: 2 document date: 2025-01-14



[pdf]

ssss docId 116FC4FA3120AB39B61DF18C7A0E3E82 Edifier M60 2 hangszórók Felhasználói kézikönyv EuronicsFigyelem! A képek csak illusztrációként szolgálnak és eltérhetnek a tényleges terméktől mellékelt USB csatlakozókábel audio streamingre szolgál használati útmutatóimages euronics hu product documents aGFzem7DoWxhdGkgw7p0bXV0YXTDsy5wZGY használati utmutato g2h2bwbl v 1 ||| Edifier **M60** 2.0 hangszrk Felhasznli kziknyv EDIFIER ConneX alkalmazs Ezzel az alkalmazssal - A bemeneti zemmdok vltsa, - A lejtszs vezrlse, - Vlassza ki vagy lltsa be az equalizereket, - Firmware frissts, s mg sok ms EDIFIER ConneX alkalmazs Az EDIFIER ConneX alkalmazs lttlse 1. Az okoseszkzvel o... lang:no score:20 filesize: 1.19 M page_count: 15 document date: 2024-09-24

Statement of Compliance – UK PSTI 2023

1. Product type

Multimedia Speaker (EDF 100074 (M60) / Basic AI)

2. Name and address of manufacturer

Edifier International Limited
F/O, 8th EDB Level of Post Office, Hong Kong

3. This declaration of compliance is prepared by the manufacturer of this product.

4. To the best of their knowledge, the manufacturer has complied with the deemed compliance conditions in Schedule 2.

UK Product Security and Trustmark Requirements for Relevant Consumer Products, Schedule 2

UK PSTI Regulation 2023: Security Requirements for Relevant Consumer Products, Schedule 2

5. References to the relevant standards in relation to which conformity is declared:

EN ISO 9001:2015, EN ISO 14001:2015, EN ISO 45001:2018, EN ISO 27001:2017, EN ISO 27701:2022

6. Defined support period for the product:

7 Years
22 April 2021

7. Signed for and on behalf of the manufacturer:

Signature

Place and date of issue

Date

8. Name:

Li Lianqiang

9. Function:

Certification Center manager

10. Signature:

Signature

Place and date of issue

Date

Edifier EDF100074 Multimedia Speaker UK PSTI 2023 Compliance Statement

Statement of Compliance for the Edifier EDF100074 Multimedia Speaker (M60) under the UK PSTI 2023 regulations, detailing product type, manufacturer information, and adherence to relevant security standards.

lang:en score:19 filesize: 79.61 K page_count: 1 document date: 2024-11-06

EDIFIER

CE

EU DECLARATION OF CONFORMITY

1. Model No., trademark:

Trademark

EDIFIER

2. Name and address of the manufacturer:

Name of the manufacturer

Edifier International Limited

Address

F/O, 8th EDB Level of Post Office, Hong Kong

3. This declaration of conformity is issued under the sole responsibility of the manufacturer.

4. Object of the declaration:

Product Name

EDF 100074

Serial Name

M60

5. The object of the declaration described above is in conformity with the relevant Union harmonisation legislation listed in Table 1 and/or other Union harmonisation legislation where applicable.

Table 1

Radio Equipment Directive (2014/53/EU)

RoHS Directive

6. References to the relevant harmonised standards or the common specifications used or references to the other technical specifications in relation to which conformity is declared:

Table 1

EN 60950-1:2012, EN 60950-1:2012/A11, EN 60950-1:2012/A12, EN 60950-1:2012/A13, EN 60950-1:2012/A14, EN 60950-1:2012/A15, EN 60950-1:2012/A16, EN 60950-1:2012/A17, EN 60950-1:2012/A18, EN 60950-1:2012/A19, EN 60950-1:2012/A20, EN 60950-1:2012/A21, EN 60950-1:2012/A22, EN 60950-1:2012/A23, EN 60950-1:2012/A24, EN 60950-1:2012/A25, EN 60950-1:2012/A26, EN 60950-1:2012/A27, EN 60950-1:2012/A28, EN 60950-1:2012/A29, EN 60950-1:2012/A30, EN 60950-1:2012/A31, EN 60950-1:2012/A32, EN 60950-1:2012/A33, EN 60950-1:2012/A34, EN 60950-1:2012/A35, EN 60950-1:2012/A36, EN 60950-1:2012/A37, EN 60950-1:2012/A38, EN 60950-1:2012/A39, EN 60950-1:2012/A40, EN 60950-1:2012/A41, EN 60950-1:2012/A42, EN 60950-1:2012/A43, EN 60950-1:2012/A44, EN 60950-1:2012/A45, EN 60950-1:2012/A46, EN 60950-1:2012/A47, EN 60950-1:2012/A48, EN 60950-1:2012/A49, EN 60950-1:2012/A50, EN 60950-1:2012/A51, EN 60950-1:2012/A52, EN 60950-1:2012/A53, EN 60950-1:2012/A54, EN 60950-1:2012/A55, EN 60950-1:2012/A56, EN 60950-1:2012/A57, EN 60950-1:2012/A58, EN 60950-1:2012/A59, EN 60950-1:2012/A60, EN 60950-1:2012/A61, EN 60950-1:2012/A62, EN 60950-1:2012/A63, EN 60950-1:2012/A64, EN 60950-1:2012/A65, EN 60950-1:2012/A66, EN 60950-1:2012/A67, EN 60950-1:2012/A68, EN 60950-1:2012/A69, EN 60950-1:2012/A70, EN 60950-1:2012/A71, EN 60950-1:2012/A72, EN 60950-1:2012/A73, EN 60950-1:2012/A74, EN 60950-1:2012/A75, EN 60950-1:2012/A76, EN 60950-1:2012/A77, EN 60950-1:2012/A78, EN 60950-1:2012/A79, EN 60950-1:2012/A80, EN 60950-1:2012/A81, EN 60950-1:2012/A82, EN 60950-1:2012/A83, EN 60950-1:2012/A84, EN 60950-1:2012/A85, EN 60950-1:2012/A86, EN 60950-1:2012/A87, EN 60950-1:2012/A88, EN 60950-1:2012/A89, EN 60950-1:2012/A90, EN 60950-1:2012/A91, EN 60950-1:2012/A92, EN 60950-1:2012/A93, EN 60950-1:2012/A94, EN 60950-1:2012/A95, EN 60950-1:2012/A96, EN 60950-1:2012/A97, EN 60950-1:2012/A98, EN 60950-1:2012/A99, EN 60950-1:2012/A100

7. EU Authorized Representative Details:

Name

Edifier International Limited

Contact Person

Customer Service

Address

Edifier House, 8th Floor, 8th EDB Level of Post Office, Hong Kong

E-mail

support@edifier.com

8. Signature:

Signature

Place and date of issue

Date

9. Name:

Li Lianqiang

10. Function:

Certification Center manager

11. Place and date of issue:

Dongguan 2024-09-10

EU Declaration of Conformity for Edifier M60 Multimedia Speaker

Official EU Declaration of Conformity for the Edifier M60 multimedia speaker, model EDF100074, confirming compliance with Radio Equipment Directive and RoHS Directive.

lang:en score:19 filesize: 61.25 K page_count: 1 document date: 2025-01-06

Ръководство за употреба

Мултимедиянен високоговорител

M60

1. Приложение EDIFIER ConneX

• Подключване на устройството към компютър, телевизор, контролер игра, таблет или персонализиран EQ.

• Настройване на функциите и

• Проверка на функциите.

Използване на приложението EDIFIER ConneX

1. С вашето умно устройство сканирайте QR кода в ръководството за бързо стартиране на приложението.

2. Може да изтеглите „EDIFIER ConneX“ в Apple App Store (iOS устройства) или Google Play (Android устройства).

3. Използвайте и инсталирайте приложението.

Как да използвате това приложение

1. Свържете устройството с приложението EDIFIER ConneX на вашето умно устройство.

2. В режим Bluetooth отворете приложението EDIFIER ConneX на вашето умно устройство.

3. Докоснете иконата за настройки и контрол на възпроизвеждането.

Забележка: BLE връзката между вашето умно устройство и високоговорителя остава активна дори ако високоговорителят е превключен на входен режим, различен от Bluetooth.

2. Какво има в кутията?

Пасивен говорител

Активен говорител

[pdf]

359876079766 Ръководство за употреба Мултимедиянен rykovodstvo m60 1753138687jarcomputers

images custom docs rykovodstvo 1753138687 |||

M60 1. EDIFIER ConneX , , EQ, . EDIFIER ConneX 1. QR . „EDIFIER ConneX Apple App Store iOS Google Play Android . 2. . 1. Bluetooth. 2. Bluetooth EDIFIER ConneX . 3. . : BLE , Bluetooth. 2. 1 ...

lang:de score:18 filesize: 716.65 K page_count: 7 document date: 2025-01-15

Edifier M60

1. Aplicativo EDIFIER ConneX

Com este aplicativo, você pode

• Alternar modos de entrada.

• Controlar a reprodução.

• Selecionar ou personalizar EQs.

• Atualizar o firmware, e

• Mais funções.

EDIFIER ConneX app

App Store

Google Play

QR Code

Baixar o Aplicativo EDIFIER ConneX

1. Em seu dispositivo inteligente, digitalize o código QR no guia de início rápido ou na embalagem.

• Você também pode pesquisar por "EDIFIER ConneX" na Apple App Store (dispositivos iOS) ou Google Play (dispositivos Android).

2. Baixe e instale o aplicativo.

Como usar este aplicativo

1. Conecte seu dispositivo inteligente ao alto-falante via Bluetooth.

2. No modo Bluetooth, abra o aplicativo EDIFIER ConneX em seu dispositivo inteligente.

3. Toque no menu para acessar as configurações e controlar a reprodução.

Nota: A conexão BLE entre seu dispositivo inteligente e o alto-falante permanece ativa mesmo quando o alto-falante é alternado para um modo de entrada que não seja Bluetooth.

2. Conteúdo da caixa



Altifalante passivo



Altifalante ativo



Cabo de alimentação




Cabo de ligação do altifalante



Cabo de áudio de 3,5 mm para 3,5mm



Cabo de áudio de 3,5 mm para RCA



Cabo USB-C para USB-C



Suportes para alto falante



Guia de início rápido




Instruções importantes de segurança

Nota:

- As imagens são apenas ilustrativas e podem diferir do produto real.
- O cabo de conexão USB incluído funciona apenas para reprodução de áudio. Não o utilize para carregar o dispositivo.
- Para a necessidade de melhoramento técnico e atualização do sistema, as informações e especificações aqui contidas podem ser ligeiramente diferentes do produto real. Se for encontrada qualquer diferença, prevalece o produto real.


3. Conexão via cabo



Nota:

- * Entrada de energia: 100~240 V~ 50/60 Hz 400 mA
- * Este tipo de conector é utilizado somente para fins de ilustração.


4. Em espera e despertar




Nota:

Para alternar o modo do alto-falante para espera ou operação, toque e mantenha pressionado o botão "⏻" no dispositivo.

5. Seleção de fonte



6. Ligação Bluetooth




↓



[Edifier M60 Speaker System User Manual and Setup Guide](#)


Comprehensive guide for setting up and using the Edifier M60 speaker system, including Bluetooth connectivity, USB audio, app control via EDIFIER ConneX, and troubleshooting.

lang:pt score:18 filesize: 331.07 K page_count: 1 document date: 0000-00-00

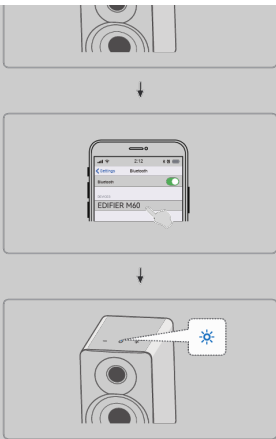


- Nota:**
- Se for necessário, o código PIN para ligação é "0000".
 - Para desfrutar de todas as funções Bluetooth, certifique-se que o seu dispositivo de fonte áudio tem os perfis A2DP e AVRCP.
 - Se não houver nenhum dispositivo conectado em 10 minutos, o alto-falante irá alternar para o modo de Bluetooth oculto. A contraluz do botão " " piscará. Neste modo, (1) novos dispositivos não podem localizar o alto-falante, mas (2) em um dispositivo já existente no registro de pareamento deste alto-falante, você pode selecionar "EDIFIER M60" da sua lista de dispositivos Bluetooth para reconectar. Para sair do modo de Bluetooth oculto, toque no botão " " do alto-falante.
 - Para desconectar-se do dispositivo Bluetooth atual, toque e mantenha pressionados os botões " " e " " do alto-falante por 1,5 segundo.

7. Conexão USB



- Nota:**
- Os seguintes sistemas operacionais são compatíveis com transmissão de áudio USB: Windows 11, Windows 10, Windows 8, e Windows 7.

8. Controle de reprodução



- Nota:**
- Nos modos AUX e USB, a sincronização de volume não é um recurso suportado. É necessário ajustar o volume no dispositivo e no alto-falante separadamente.

9. Especificações

Potência de saída total (RMS): E/D (Agudos): 15 W+15 W
E/D (Médio alcance e graves): 18 W+18 W

Resposta de frequência: 58 Hz-40 kHz

Declaração para UE

Banda de Frequência: 2.402 GHz ~ 2.480 GHz

RF Potência de Saída: ≤10 dBm (EIRP)

Não existem restrições à utilização.

10. Resolução de problemas

Não é possível conectar a um dispositivo Bluetooth

- Certifique-se que a distância entre este produto e seu dispositivo Bluetooth seja menor que 10 metros e não haja nenhum obstáculo entre eles.
- Certifique-se que nenhum dispositivo está conectado a este produto através do Bluetooth.
- Certifique-se que este produto está no modo de pareamento de Bluetooth. Caso contrário, mude-o manualmente para esse modo.
- Reinicie este produto, habilite a função Bluetooth em seu dispositivo Bluetooth, depois tente novamente.

Sem energia

- Certifique-se que o cabo de energia está corretamente conectado.
- Certifique-se que a alimentação de energia não foi interrompida.

Sem som

- Certifique-se que este produto está ligado.
- Certifique-se que o produto e seu dispositivo estão corretamente conectados.
- Certifique-se que a reprodução não está pausada.
- Certifique-se que o produto e seu dispositivos não estão no modo de silêncio.
- *Recomenda-se verificar o manual do usuário para obter mais informações.*

Para mais informações sobre a EDIFIER, consulte o site www.edifier.com
Para obter informações sobre a garantia da EDIFIER, aceda à página relevante
do país em www.edifier.com e consulte a secção dos Termos da Garantia.
EUA e Canadá: service@edifier.ca
América do Sul: Visite o site www.edifier.com (Inglês) ou www.edifierla.com
(Espanhol/Português) para obter informações sobre o contacto local

[illegible]

lang:en score:14 filesize: 292.39 K page_count: 2 document date: 2025-03-20

[illegible]

lang:de score:14 filesize: 326.98 K page_count: 19 document date: 2017-11-09

PART C Hardware Periphery Compatibility		
1.Hard Drives		
1.1. SSD Devices		
Type	Model	
ADATA	AS51153	
	DS3846-40	
	SP205-256G	
	S51111-180	
	AC141-256G11-1280	
OCZ	OCCT-25ASAT3-256G	
	VT1R-25ASAT3-1280	
	VT1XA-25ASAT3-1800	
	VT140-25ASAT3-1280	
	VT1R160-25ASAT3-2400	
WD	WD1002FBEZ-60	
	WD1002FBEZ-60	
	WD1002FBEZ-60	
	WD1002FBEZ-60	
	WD1002FBEZ-60	
APACER	AS5115-128G	
	CS5115-128G	
	CS5115-128G	
	CS5115-128G	
	CS5115-128G	
CORSAIR	CM5115-128G	
	CM5115-128G	
	CM5115-128G	
	CM5115-128G	
	CM5115-128G	
SATA 6G SSD	Crucial	
	FLUENT	
	GALAXY	
	Infallible	
	Kingston	
Samsung	SM5115-128G	
	SM5115-128G	
	SM5115-128G	
	SM5115-128G	
	SM5115-128G	
Patriot	PT5115-128G	
	PT5115-128G	
	PT5115-128G	
	PT5115-128G	
	PT5115-128G	
RIMACORE	RCP-1125-B-MC	
	RCP-1125-B-MC	
	RCP-1125-B-MC	
	RCP-1125-B-MC	
	RCP-1125-B-MC	

lang:de score:13 filesize: 331.74 K page_count: 14 document date: 2016-01-21

PART C.Hardware Periphery Compatibility		
1.Hard Drives		
1.1. SSD Devices		
Type	Model	
SATA 6G SSD	ADATA	AS81153
		ES300 16G
		SP700 120G
		SA910 120G
		AS14 25SAT3 120G
	OCZ	OCZ1 25SAT3 250G
		VTR1 25SAT3 120G
		VTX4 25SAT3 120G
		VTX400 25SAT3 120G
		VTR100 25SAT3 240G
		VTX400 25SAT3 240G
		VTX400A 25SAT3 240G
		ARC100 25SAT3 240G
		TRACON 27 25G 240G
		NEUTRON GTX 240G
	APACER	AS100 120G
	CORSAIR	CSSD 240GBSS BK
		CSSD 160GB BK
		NEUTRON GTX 240G
	Crucial	CT240MX600SSD1
		CT240MX100SSD1
		FB8 120G
	GALAXY	LAZER GT 120G
		GV120MT100-A1
		GV120MT100-A1
	Intel®	SSDSC2CT180AAK5
		SSDSC2BW180AAK5
		SSDSC2CT240AAK5
		SSDSC2BP240G4
	Kingmax	KM120GME32
	Kingston	HYPERRX FURY 240G
		HYPERRX SH100G
		SKC300S37A 120G
	Parasitic	SV300S37A 120G
		RP-SSB400AK
		FX 640G 40G
	PLEXTOR	FX 200MS 250G
		FX 120MPSPD
		FX 250MS
		FX 250MPRO
	PATRIOT	PM900 250GB 40G
	RENOCORE	RCF-V-12018-MC
N3160TH PAGE 1		

[ASUS N3160TH Hardware Periphery Compatibility List](#)

A comprehensive compatibility list for hardware peripherals with the ASUS N3160TH, covering SSDs, HDDs, USB storage devices, audio equipment, networking components, keyboards, mice, optical drives, and monitors.

lang:de score:13 filesize: 267.28 K page_count: 14 document date: 2017-07-18

PART C.Hardware Periphery Compatibility		
1.Hard Drives		
1.1. SSD Devices		
Type	Model	
SATA 6G SSD	ADATA	AS81153
		ES300 16G
		SP700 120G
		SA910 120G
		AS14 25SAT3 120G
	OCZ	OCZ1 25SAT3 250G
		VTR1 25SAT3 120G
		VTX4 25SAT3 120G
		VTX400 25SAT3 120G
		VTR100 25SAT3 240G
		VTX400 25SAT3 240G
		VTX400A 25SAT3 240G
		ARC100 25SAT3 240G
		TRACON 27 25G 240G
		NEUTRON GTX 240G
	APACER	AS100 120G
	CORSAIR	CSSD 240GBSS BK
		CSSD 160GB BK
		NEUTRON GTX 240G
	Crucial	CT240MX600SSD1
		CT240MX100SSD1
		FB8 120G
	GALAXY	LAZER GT 120G
		GV120MT100-A1
		GV120MT100-A1
	Intel®	SSDSC2CT180AAK5
		SSDSC2BW180AAK5
		SSDSC2CT240AAK5
		SSDSC2BP240G4
	Kingmax	KM120GME32
	Kingston	HYPERRX FURY 240G
		HYPERRX SH100G
		SKC300S37A 120G
	Parasitic	SV300S37A 120G
		RP-SSB400AK
		FX 640G 40G
	PLEXTOR	FX 200MS 250G
		FX 120MPSPD
		FX 250MS
		FX 250MPRO
	PATRIOT	PM900 250GB 40G
	RENOCORE	RCF-V-12018-MC
Z170 PRO GAMING PAGE 1		

[ASUS Z170 PRO GAMING Motherboard Hardware Compatibility List](#)

A comprehensive compatibility list for the ASUS Z170 PRO GAMING motherboard, detailing supported hardware components including SSDs, HDDs, power supplies, graphics cards, audio devices, peripherals, and more.

lang:de score:12 filesize: 471.62 K page_count: 20 document date: 2016-12-20

PART C.Hardware Periphery Compatibility			
1.Hard Drives			
1.1. HDD Devices			
Type	Model		
SATA 6G	HITACHI	HD27200ALAK40	
		HD27200DLAK40	
		HD27210DLLE60	
		HD27200DLLE60	
	Seagate	ST2000DL003	
		ST3000DM001	
		ST3000DM001	
		ST3000DM001	
	TOSHIBA	DT01ACA000	
		DT01ACA000	
		WD1002FAEX	
		WD1002FAEX	
	WD	WD5000AAKX	
		WD5000AAKX	
		WD5000AAKX	
		WD5000AAKX	
	SATA 3G	HITACHI	HTD721016LAK60
			HTD721016LAK60
			HTD721016LAK60
			HTD721016LAK60
SAMSUNG		HD175SJ	
		HD175SJ	
		HD175SJ	
		HD175SJ	
Seagate		ST31000G2AS	
		ST31000G2AS	
		ST31000G2AS	
		ST31000G2AS	
WD	WD6401LML5		
	WD6402AC0		

1.2. SSD Devices		
Type	Model	
SATA 6G SSD	ADATA	AS51153
	CORSAIR	CX512 128G
	CORSAIR	CX512 128G
	CORSAIR	CX512 128G

Copyright 2013 ASUSTek Computer Inc. PAGE 1

1B11

[pdf] Safety Datasheet

Vista Procedure QTC ASUSTeK H81T Devices report dlcdnet asus pub ASUS mb LGA1150 SI

PART C.Hardware Periphery Compatibility 1.Hard Drives 1.1. HDD Devices Type

SATA 6G SATA 3G HITAC ... ndle KB-N8510 Model Wedge Touch Mouse

MB112FE/B GX950 GX1000 STORM-SPAWN The Spirit SPAWN VENGEANCE M60

VENGEANCE M90 MS111 P M8000X ECO600 HELLION G400 G700 M515 M905

Touchpad T650 T620 ARC TOUCH Wir...

lang:de score:10 filesize: 174.69 K page_count: 12 document date: 2013-11-25

PART C.Hardware Periphery Compatibility		
1.Hard Drives		
1.1. HDD Devices		
Type	Model	
SATA 6G	HITACHI	HD27200ALAK40
		HD27200DLAK40
		HD27200DLLE60
		HD27200DLLE60
	Seagate	ST2000DL003
		ST3000DM001
		ST3000DM001
		ST3000DM001
	TOSHIBA	DT01ACA000
		DT01ACA000
		WD1002FAEX
		WD1002FAEX
	WD	WD5000AAKX
		WD5000AAKX
		WD5000AAKX
		WD5000AAKX
	HITACHI	HTD721016LAK60
		HTD721016LAK60
		HTD721016LAK60
		HTD721016LAK60
SATA 3G	SAMSUNG	HD175SJ
		HD175SJ
		HD175SJ
		HD175SJ
	Seagate	ST31000G2AS
		ST31000G2AS
		ST31000G2AS
		ST31000G2AS
	WD	WD1002FAEX
		WD1002FAEX
		WD1002FAEX
		WD1002FAEX
WD1002FAEX		

1.2. SSD Devices		
Type	Model	
SATA 6G SSD	ADATA	AS51153
	CORSAIR	CM512 128G
	CORSAIR	CM512 128G
	CORSAIR	CM512 128G
Copyright 2013 ASUS® Computer Inc. PAGE 1 Q87T		

ASUS Q87T Motherboard Peripheral Compatibility List

Comprehensive compatibility guide for the ASUS Q87T motherboard, detailing supported hard drives, SSDs, USB devices, audio equipment, network cards, input devices, monitors, and more, including specific manufacturer models.

lang:de score:10 filesize: 147.73 K page_count: 12 document date: 2013-10-22

PART C.Hardware Periphery Compatibility		
1.Hard Drives		
1.1. SSD Devices		
Type	Model	
SATA 6G SSD	ADATA	AS51153
		AS51153
		AS51153
		AS51153
	OCZ	VERTEX 4-256G
		VERTEX 4-256G
		VERTEX 4-256G
		VERTEX 4-256G
	CORSAIR	CM512 128G
		CM512 128G
		CM512 128G
		CM512 128G
Crucial	CT128M4SSD01	
	CT128M4SSD01	
	CT128M4SSD01	
	CT128M4SSD01	
GALAXY	LSMH101-128G	
	LSMH101-128G	
	LSMH101-128G	
	LSMH101-128G	
Intel	SSDSC20CT180A4K5	
	SSDSC20CT180A4K5	
	SSDSC20CT180A4K5	
	SSDSC20CT180A4K5	
Kingmax	KM120C-SM42	
	KM120C-SM42	
	KM120C-SM42	
	KM120C-SM42	
Kingston	HPV950_9H10053	
	HPV950_9H10053	
	HPV950_9H10053	
	HPV950_9H10053	
Panasonic	SS3000-CT180A4K5	
	SS3000-CT180A4K5	
	SS3000-CT180A4K5	
	SS3000-CT180A4K5	
PLEXTOR	PL710M950	
	PL710M950	
	PL710M950	
	PL710M950	
Patriot	PP600S25SSD-600	
	PP600S25SSD-600	
PUNCORE	PCP-V-12818M4G	
	PCP-V-12818M4G	

N3050T R2.0



PAGE 1

ASUS N3050T R2.0 Hardware Periphery Compatibility List

A comprehensive compatibility list for hardware peripherals with the ASUS N3050T R2.0, including hard drives, USB storage devices, audio equipment, networking components, keyboards, mice, optical drives, monitors, and more.

lang:de score:10 filesize: 353.5 K page_count: 15 document date: 2016-06-08

PART C.Hardware Periphery Compatibility		
1.Hard Drives		
1.1. HDD Devices		
Type	Model	
HDDT	HGST	HDE721000ALAE40
		HDE721000ALAE42
		HDE721000ALAE44
		HDE721000ALAE46
		HDE721000ALAE48
		HDE721000ALAE50
		HDE721000ALAE52
		HDE721000ALAE54
		HDE721000ALAE56
		HDE721000ALAE58
SATA 6G	Seagate	ST2000DL009
		ST2000DM002
		ST1000DM003
		ST8000DM001
		ST2000DM001
		ST1000DM004
		ST4000DM000
		ST1000DM001
		ST2000DM003
		ST1000DM001
SATA 6G	TOSHIBA	DT10ACA100
		DT10ACA055
		WD1002FZEX
		WD1002FZEX
		WD1002FZEX
		WD1002FZEX
		WD1002FZEX
		WD1002FZEX
		WD1002FZEX
		WD1002FZEX
SATA 3G	HITACHI	HDE721000ALAE40
		HDE721000ALAE42
		HDE721000ALAE44
		HDE721000ALAE46
		HDE721000ALAE48
		HDE721000ALAE50
		HDE721000ALAE52
		HDE721000ALAE54
		HDE721000ALAE56
		HDE721000ALAE58

ASUS H110T Hardware Compatibility List

A comprehensive list of compatible hardware devices for the ASUS H110T, including hard drives, SSDs, USB storage, audio devices, networking equipment, and more.

lang:de score:10 filesize: 341.38 K page_count: 14 document date: 2016-12-20

PART C.Hardware Periphery Compatibility		
1.Hard Drives		
1.1. SSD Devices		
Type	Model	
SATA 6G SSD	ADATA	AS51153
		AS51153
		SP900-256G
		AS51153-128G
		AS51153-256G
		AS51153-512G
		AS51153-1024G
		AS51153-2048G
		AS51153-4096G
		AS51153-8192G
SATA 6G SSD	OCZ	VT100-256G
		VT100-512G
		VT100-1024G
		VT100-2048G
		VT100-4096G
		VT100-8192G
		VT100-16384G
		VT100-32768G
		VT100-65536G
		VT100-131072G
SATA 6G SSD	CORSAIR	CM600-128G
		CM600-256G
		CM600-512G
		CM600-1024G
		CM600-2048G
		CM600-4096G
		CM600-8192G
		CM600-16384G
		CM600-32768G
		CM600-65536G

[pdf] Safety Datasheet

Vista Procedure QTC ASUS Xiaomi pad 16G Nokia N1 32GB SAMSUNG SM G3818 2 8 3 Digital

Camera Device 7 Web Cams Type Model USB 0 BlueLover M2200 Logitech C270 HD PRIME N3060T

Devices report dlcdhnts asus pub mb Intel CPU Onboard |||

PART C.Hardware Periphery Compatibility 1.Hard Drives 1.1. SSD Devices Type SATA 6G SSD ADATA OCZ ... 3.0-32GB i-Disk Rex101-32GB Thunder 1-32GB FLEXI-DRIVE EXTREME DUO SDCZ80-16GB-Z46 Blaze B10 MARVEL-M60-64GB SFD213-USB-64GB EXPRESS RC4-USB 3.0-64GB T132-USB 3.0-64GB JetFlash 780 USM16SA1-16GB Model...

lang:de score:10 filesize: 332.4 K page_count: 14 document date: 2017-06-29

Hardware Periphery Compatibility		
1.Hard Drives		
1.1. HDD Devices		
Type	Model	
SATA 6G	Seagate	ST2000DL009
		ST2000DM002
		ST1000DM003
		ST8000DM001
		ST2000DM001
		ST1000DM004
		ST4000DM000
		ST1000DM001
		ST2000DM003
		ST1000DM001
SATA 6G SSD	OCZ	VT100-256G
		VT100-512G
		VT100-1024G
		VT100-2048G
		VT100-4096G
		VT100-8192G
		VT100-16384G
		VT100-32768G
		VT100-65536G
		VT100-131072G

ASUS VC66 Series Hardware Periphery Compatibility Report

A comprehensive compatibility report for hardware peripherals with the ASUS VC66 Series, detailing compatible Hard Drives (HDD and SSD), USB Storage devices (Card Readers, External Enclosures, USB Hubs), Audio devices (Earphones, Microphones, Sound Adapters), Speaker, Ethernet devices, Wireless Networking devices, Fans and Heatsinks, Keyboards/Mice, Optical Drives, Printer Devices, TV Tuner & Video Capture Cards, Apple Devices, Android Devices, Digital Cameras, Bluetooth Adapters, Tablets, PC Game Controllers, Web Cams, Display Devices (Monitors, Projectors), and Modems.

lang:de score:10 filesize: 231.76 K page_count: 14 document date: 2017-06-08

[illegible]

A comprehensive compatibility guide for hardware peripherals supported by the ASUS H110S1, detailing a wide range of storage devices, audio equipment, networking components, input devices, displays, and more, along with their respective manufacturers and model numbers.

PART C: Hardware Periphery Compatibility		
1: Hard Drives		
1.1: HDD Devices		
Type		Model
HGST		HQS723030AL640
		HQS721610LE630
		HQS721500LE630
		HQS721400LE630
		HQS721300LE630
		HQS720900LE610
		ST1000CA003
		ST1000CA002
		ST1000CA003
		ST1000CA001
Seagate		ST1000LM004
		ST1000LX005
		ST1000DM001
		ST1000MA003
		ST1000NM003
SATA 6G		ST2000NM004
		ST2000DM002
		ST1000NM004
		ST1000CA002
		ST1000CA003
TORRENT		WD1002FLEX
		WD10EADZ
		WD1002FLEX
		WD1002FLEX
		WD1002FLEX
WD		WD1002FLEX
		WD1002FLEX
		WD1002FLEX
		WD1002FLEX
		WD1002FLEX
SATA 3G		WD1002FLEX
		WD1002FLEX
		WD1002FLEX
		WD1002FLEX
		WD1002FLEX

A comprehensive compatibility list for ASUS hardware peripherals, detailing compatibility across various device categories including storage, networking, audio, input devices, and more, with specific model numbers and brands.

[illegible]

Vista Procedure QTC ASUSTeK H81M K Devices Report 0925 dlcdnet asus 80 pub ASUS mb LGA1150

VENGEANCE M90 MS111 P M8000X ECO600 HELLION G400 G700 M515 M905

lang:en score:9 filesize: 184.81 K page_count: 17 document date: 2013-09-23

lang:en score:9 filesize: 184.81 K page_count: 17 document date: 2013-09-23

PART C.Hardware Periphery Compatibility	
1.Power Supplies	
W8 Power Supply	
	Model
A-Data	AP-500-1680G24
	CP-800
	CP-1000
	EA-5000
Antec	EA-450-CPREEN
	EA-750
	HD-550
	HD-650
AeroCool	STRIKE-X-600
Babaco	PG500W-D
Century Star	Big Powerwall 320
CoolerMaster	RS-400-SPIVA-D3
	RS-200-80GA-D3
	RS-200-SPIVA-D3
	RS-460-ASAA-D3
COMMANDER	RS-700-FCAL-D3
	RFP-COM750
	CMP-SU-550TXM
	CMP-SU-550TXM
CORSAIR	CMP-SU-550TXM
DELUX	DLP-650PS
D-HIGH	DHP-3000-GHP-80P
EnerMAX	EPM6500-WT
Enertec	EN-300-ATX-300C
FSP	AX-300H2C
	AX-310H1N
	PT-650M
GoldenField	ATX-5395-Silence
GreatWall	GTX-400SD
	GTW-250GT
HABER	MT-750
Huntkey	HunkKey HK-400-55AP-2.3+
	HunkKey HK-1000-110PE(X)-560
J-POWER	JP-1000PS-80
LEPA	G1600-MA
LCZ	F11750
ROSEWILL	RBT11000-M
	SS-7000M
Seasonic	SS-1000SP
	SS-1200AM
Silverstone	ST-600P-D
	ST-600P-F
Sigtop	400P(S)-400P(F)
Silverstone	SST-518SF-D3
	SST-518SF-P
H81M-E R2.0 PAGE 1	

ASUS H81M-E R2.0 Device Compatibility Report

This document details the compatibility of various hardware components with the ASUS H81M-E R2.0 motherboard, including power supplies, hard drives, SSDs, peripherals, audio devices, graphic cards, networking cards, and more.

lang:en score:9 filesize: 160.01 K page_count: 17 document date: 2014-09-17

PART C.Hardware Periphery Compatibility	
1.Power Supplies	
W8 Power Supply	
	Model
A-Data	AP-500-1680G24
	CP-800
	CP-1000
	EA-5000
Antec	EA-450-CPREEN
	EA-750
	HD-550
	HD-650
AeroCool	STRIKE-X-600
Babaco	PG500W-D
Century Star	Big Powerwall 320
CoolerMaster	RS-400-SPIVA-D3
	RS-200-80GA-D3
	RS-200-SPIVA-D3
	RS-460-ASAA-D3
COMMANDER	RS-700-FCAL-D3
	RFP-COM750
	CMP-SU-550TXM
	CMP-SU-550TXM
CORSAIR	CMP-SU-550TXM
DELUX	DLP-650PS
D-HIGH	DHP-3000-GHP-80P
EnerMAX	EPM6500-WT
Enertec	EN-300-ATX-300C
FSP	AX-300H2C
	AX-310H1N
	PT-650M
GoldenField	ATX-5395-Silence
GreatWall	GTX-400SD
	GTW-250GT
HABER	MT-750
Huntkey	HunkKey HK-400-55AP-2.3+
	HunkKey HK-1000-110PE(X)-560
J-POWER	JP-1000PS-80
LEPA	G1600-MA
LCZ	F11750
ROSEWILL	RBT11000-M
	SS-7000M
Seasonic	SS-1000SP
	SS-1200AM
Silverstone	ST-600P-D
	ST-600P-F
Sigtop	400P(S)-400P(F)
Silverstone	SST-518SF-D3
	SST-518SF-P
H81M-D R2.0 PAGE 1	

ASUS H81M-D R2.0 Hardware Compatibility Report

This document details the hardware compatibility for the ASUS H81M-D R2.0 motherboard, listing compatible power supplies, hard drives, SSDs, peripherals, audio devices, controller cards, networking devices, fans, heatsinks, keyboards, mice, optical drives, printers, TV cards, Apple devices, Android devices, digital cameras, Bluetooth adapters, tablets, game controllers, webcams, floppy drives, monitors, UPS, and modems.

lang:en score:9 filesize: 158.72 K page_count: 17 document date: 2014-09-17

PART C.Hardware Periphery Compatibility	
1.Hard Drives	
1.1. SSD Devices	
Type	Model
ADATA	AS5100
	AS5100
	AS5100
	AS5100
OCZ	AG14-25SAT3-128G
	OC11-25SAT3-240G
	VT101-25SAT3-128G
	VT104-25SAT3-128G
SATA 6G SSD	VTX400-25SAT3-128G
	VTX400-25SAT3-240G
	VTX400-25SAT3-480G
	VTX400-25SAT3-960G
APACER	AS5100-128G
	AS5100-240G
	AS5100-480G
	AS5100-960G
CORSAIR	CM501-160GBA-BK
	CM501-320GBA-BK
	CM501-640GBA-BK
	CM501-1280GBA-BK
Crucial	B550-128G
	B550-240G
	B550-480G
	B550-960G
FLUITSU	FB5-128G
	FB5-240G
	FB5-480G
	FB5-960G
GALAXY	GB120MT103-A1
	GB120MT103-A1
	GB120MT103-A1
	GB120MT103-A1
Intel	SSDSC200W400A01
	SSDSC200W400A01
	SSDSC200W400A01
	SSDSC200W400A01
Kingmax	KM120GSM12
	KM120GSM12
	KM120GSM12
	KM120GSM12
Kingston	HP6PERX 120G
	HP6PERX 240G
	HP6PERX 480G
	HP6PERX 960G
Paragon	PR-5000S-128G
	PR-5000S-240G
	PR-5000S-480G
	PR-5000S-960G
PLEXTOR	PL-128G
	PL-240G
	PL-480G
	PL-960G
PATRIOT	PP1000S250G-DH-800
	PP1000S250G-DH-800
	PP1000S250G-DH-800
	PP1000S250G-DH-800
PILCO	PZ-128G
	PZ-240G
	PZ-480G
	PZ-960G
B150M-ET D3 PAGE 1	

ASUS B150M-ET D3 Device Compatibility Report

A comprehensive compatibility report for the ASUS B150M-ET D3 motherboard, detailing compatible hardware components including SSDs, HDDs, power supplies, peripherals, audio devices, sound cards, graphics cards, networking devices, fans, heatsinks, keyboards, mice, optical drives, printers, TV tuners, and monitors.

lang:af score:9 filesize: 446.21 K page_count: 17 document date: 2015-08-25

PART C.Hardware Periphery Compatibility		
1.Hard Drives		
1.1. SSD Devices		
Type	Model	
SATA 6G SSD	ADATA	AS51183
		ES338-16G
		SP905-256G
		SA510-128G
		AG14-25SAT3-128G
	OCZ	OC1T1-25SAT3-128G
		OC1T1-25SAT3-128G
		VTX44-25SAT3-128G
		VTX44-25SAT3-128G
		VTX44-25SAT3-128G
	APACER	AS51105-128G
		AS51105-128G
		AS51105-128G
		AS51105-128G
		AS51105-128G
	CORSAIR	CM501-16GB-SSD-512
		CM501-16GB-SSD-512
		CM501-16GB-SSD-512
		CM501-16GB-SSD-512
		CM501-16GB-SSD-512
	Crucial	CT500BX128
		CT500BX128
		CT500BX128
		CT500BX128
		CT500BX128
	GALAXY	LS1200
		LS1200
		LS1200
		LS1200
		LS1200
Intel	SSDSC2CT180AAK5	
	SSDSC2CT180AAK5	
	SSDSC2CT180AAK5	
	SSDSC2CT180AAK5	
	SSDSC2CT180AAK5	
Kingmax	SK500S37A-128G	
	SK500S37A-128G	
	SK500S37A-128G	
	SK500S37A-128G	
	SK500S37A-128G	
Kingston	SH10385-128G	
	SH10385-128G	
	SH10385-128G	
	SH10385-128G	
	SH10385-128G	
Parasonic	PR-SS64MS-256G	
	PR-SS64MS-256G	
	PR-SS64MS-256G	
	PR-SS64MS-256G	
	PR-SS64MS-256G	
PLEXTOR	PL-128M5P	
	PL-128M5P	
	PL-128M5P	
	PL-128M5P	
	PL-128M5P	
PATRIOT	PM500S37A-128G	
	PM500S37A-128G	
	PM500S37A-128G	
	PM500S37A-128G	
	PM500S37A-128G	
RACORE	RCF-V-128GB-M4	
	RCF-V-128GB-M4	
	RCF-V-128GB-M4	
	RCF-V-128GB-M4	
	RCF-V-128GB-M4	
	MZ-7HE256BEP-PRO	

B150 PLUS D3	PAGE 1	
--------------	--------	---

ASUS B150-PLUS D3 Hardware Periphery Compatibility List

Comprehensive compatibility list for the ASUS B150-PLUS D3 motherboard, detailing supported hardware peripherals including SSDs, HDDs, power supplies, audio devices, graphics cards, networking components, and more.

lang:af score:9 filesize: 465.1 K page_count: 18 document date: 2015-08-21

PART C.Hardware Periphery Compatibility		
1.Hard Drives		
1.1. SSD Devices		
Type	Model	
SATA 6G SSD	ADATA	AS51183
		ES338-16G
		SP905-256G
		SA510-128G
		AG14-25SAT3-128G
	OCZ	OC1T-25SAT3-128G
		OC1T-25SAT3-128G
		VTX4-25SAT3-128G
		VTX4-25SAT3-128G
		VTX4-25SAT3-128G
	APACER	AS51105-128G
		AS51105-128G
		AS51105-128G
		AS51105-128G
		AS51105-128G
	CORSAIR	CM501-16GB-SSD-512
		CM501-16GB-SSD-512
		CM501-16GB-SSD-512
		CM501-16GB-SSD-512
		CM501-16GB-SSD-512
	Crucial	CT500BX128
		CT500BX128
		CT500BX128
		CT500BX128
		CT500BX128
	GALAXY	LS1200
		LS1200
		LS1200
		LS1200
		LS1200
	Intel	SSDSC2CT180AAK5
		SSDSC2CT180AAK5
		SSDSC2CT180AAK5
		SSDSC2CT180AAK5
		SSDSC2CT180AAK5
	Kingmax	SK1200S37A
		SK1200S37A
		SK1200S37A
		SK1200S37A
		SK1200S37A
	Kingston	SH10385-128G
		SH10385-128G
		SH10385-128G
		SH10385-128G
		SH10385-128G
	Panasonic	PR-SS64MS-256G
		PR-SS64MS-256G
		PR-SS64MS-256G
		PR-SS64MS-256G
		PR-SS64MS-256G
	PLEXTOR	PL-128M5P
		PL-128M5P
		PL-128M5P
		PL-128M5P
		PL-128M5P
	PATRIOT	PM500S37A-128G
		PM500S37A-128G
		PM500S37A-128G
		PM500S37A-128G
		PM500S37A-128G
	RACORE	RCF-V-128GB-M4
		RCF-V-128GB-M4
		RCF-V-128GB-M4
		RCF-V-128GB-M4
		RCF-V-128GB-M4
	SAMSUNG	MZ-7HE256BEP-PRO
		MZ-7HE256BEP-PRO
		MZ-7HE256BEP-PRO
		MZ-7HE256BEP-PRO
		MZ-7HE256BEP-PRO
MZ-7HE256BEP-PRO		

N3150M-E

PAGE 1



ASUS N3150M-E Hardware Compatibility List

A comprehensive compatibility list for ASUS N3150M-E, detailing compatible SSDs, HDDs, power supplies, USB devices, audio equipment, graphics cards, networking devices, input peripherals, storage drives, monitors, UPS, and modems from various manufacturers.

lang:de score:9 filesize: 457.92 K page_count: 17 document date: 2015-06-11

Type	Model	
SATA 6G SSD	ADATA	AS51183
		ES338-16G
		SP905-256G
		SA510-128G
		AG14-25SAT3-128G
		OC1T1-25SAT3-128G
		VTX44-25SAT3-128G
		VTX44-25SAT3-128G
		VTX44-25SAT3-128G
		VTX44-25SAT3-128G
		VTX44-25SAT3-128G
		VTX44-25SAT3-128G
		VTX44-25SAT3-128G
		VTX44-25SAT3-128G
		VTX44-25SAT3-128G
		VTX44-25SAT3-128G
		VTX44-25SAT3-128G
		VTX44-25SAT3-128G
		VTX44-25SAT3-128G
		VTX44-25SAT3-128G
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	
	VTX44-25SAT3-128G	

ASUS Hardware Periphery Compatibility List

A comprehensive compatibility list for ASUS hardware peripherals, including SSDs, HDDs, power supplies, audio devices, controller cards, networking equipment, fans, keyboards, mice, optical drives, monitors, UPS, and modems.

lang:de score:9 filesize: 457.8 K page_count: 17 document date: 2015-06-11

PART C.Hardware Periphery Compatibility		
1.Hard Drives		
1.1. SSD Devices		
Type	Model	
SATA 6G SSD	ADATA	AS511S3
		ES300-16G
		SP400-256G
		SA510-128G
		AS14-25SAT3-128G
	OCZ	OC11-25SAT3-256G
		VTR11-25SAT3-128G
		VTR14-25SAT3-128G
		VTR150-25SAT3-240G
		VTR160-25SAT3-240G
	APACER	VTX460A-25SAT3-240G
		ARC100-25SAT3-240G
		RACON-PT503-240G
		AS510S-128G
		CS504-240GBOS-BK
	CORSAIR	CS501-480GBA-BK
		NEUTRON-CT5-240G
		Crucial
		CF240MXVSSD1
		CF250MXVSSD1
	FUJITSU	LA58A-0T-128G
		FBB-128G
	GALAXY	GALAXY
		GALAXY
		GALAXY
	Intel	SS500CT160MKS
		SS500BWA60MKS
		SS500CT240MKS
		SS500BWA60MKS
		SS500BWA60MKS
	Kingmax	KM120GSM32
		HPPERLX-128G
		HPPERLX-51100G
		HP100G-128G
		SP300G-128G
	Kingston	SKC300S7A-128G
		SKC300S7A-128G
		SKC300S7A-128G
		SKC300S7A-128G
		SKC300S7A-128G
	Panasonic	SS300S7A-128G
		RP-SS300S7A-128G
		RP-SS300S7A-128G
		RP-SS300S7A-128G
		RP-SS300S7A-128G
	PLEXTOR	PL-480G-128G
		PL-480G-128G
		PL-480G-128G
		PL-480G-128G
		PL-480G-128G
	Patriot	PP300S7A-128G
		PP300S7A-128G
		PP300S7A-128G
		PP300S7A-128G
		PP300S7A-128G
	Runcore	RCP-V-128G-MC
		RCP-V-128G-MC
		RCP-V-128G-MC
		RCP-V-128G-MC
		RCP-V-128G-MC
	Samsung	MZ-7625605SPRO
		MZ-7625605SPRO
		MZ-7625605SPRO
		MZ-7625605SPRO
		MZ-7625605SPRO

ASUS Hardware Compatibility List

A comprehensive list of compatible hardware devices for ASUS products, including storage, power supplies, peripherals, audio devices, graphics cards, networking equipment, and more.

lang:de score:9 filesize: 411.34 K page_count: 18 document date: 2015-05-11

PART C.Hardware Periphery Compatibility		
1.Power Supplies		
Type	Model	
Q87I-PLUS	AcBel	SP-500-1650G24
		CP-800
		CP-1000
		EA-500G
		EA-600-GREEN
	Antec	EA-750
		EA-750
		EA-750
		EA-750
		EA-750
	AeroCool	STRIKE-X-600
		STRIKE-X-600
		STRIKE-X-600
		STRIKE-X-600
		STRIKE-X-600
	Century Star	Big Powerwall 320
		Big Powerwall 320
		Big Powerwall 320
		Big Powerwall 320
		Big Powerwall 320
	CoolerMaster	RS-400-850A-D3
		RS-400-850A-D3
		RS-400-850A-D3
		RS-400-850A-D3
		RS-400-850A-D3
	COMMANDER	RFP-500W-63
		RFP-500W-63
		RFP-500W-63
		RFP-500W-63
		RFP-500W-63
	CORSAIR	CMP500-SSAX
		CMP500-SSAX
		CMP500-SSAX
		CMP500-SSAX
		CMP500-SSAX
	DELLER	CHP-3000-1650G
		CHP-3000-1650G
		CHP-3000-1650G
		CHP-3000-1650G
		CHP-3000-1650G
	EnerMAX	EN-300ATX-330G
		EN-300ATX-330G
		EN-300ATX-330G
		EN-300ATX-330G
		EN-300ATX-330G
	Enermax	EN-300ATX-330G
		EN-300ATX-330G
		EN-300ATX-330G
		EN-300ATX-330G
		EN-300ATX-330G
	FSP	ATX-500W-63
		ATX-500W-63
		ATX-500W-63
		ATX-500W-63
		ATX-500W-63
	Gigabyte	ATX-500W-63
		ATX-500W-63
		ATX-500W-63
		ATX-500W-63
		ATX-500W-63
	GreenWall	ATX-500W-63
		ATX-500W-63
		ATX-500W-63
		ATX-500W-63
		ATX-500W-63
	HAMEE	ATX-500W-63
		ATX-500W-63
		ATX-500W-63
		ATX-500W-63
		ATX-500W-63
	Huntley	Huntley HK-400-550P-2.3L
		Huntley HK-400-550P-2.3L
		Huntley HK-400-550P-2.3L
		Huntley HK-400-550P-2.3L
		Huntley HK-400-550P-2.3L
	J-POWER	JP-1000W-63
		JP-1000W-63
		JP-1000W-63
		JP-1000W-63
		JP-1000W-63
	LEPA	LEPA-1000W-63
		LEPA-1000W-63
		LEPA-1000W-63
		LEPA-1000W-63
		LEPA-1000W-63
	OCZ	P-1750
		P-1750
		P-1750
		P-1750
		P-1750
	ROBEWELL	R801-1000-M
		R801-1000-M
		R801-1000-M
		R801-1000-M
		R801-1000-M
	Seasonic	SS-1000W-63
		SS-1000W-63
		SS-1000W-63
		SS-1000W-63
		SS-1000W-63
	Saveram	ST-800P-63
		ST-800P-63
		ST-800P-63
		ST-800P-63
		ST-800P-63
	Segotep	400P-150-400P-150
		400P-150-400P-150
		400P-150-400P-150
		400P-150-400P-150
		400P-150-400P-150
	Silverstone	SST-510P-63
		SST-510P-63
		SST-510P-63
		SST-510P-63
		SST-510P-63

ASUS Q87I-PLUS Hardware Periphery Compatibility Report

A comprehensive compatibility report for the ASUS Q87I-PLUS motherboard, detailing compatible power supplies, hard drives, SSDs, peripherals, audio devices, graphics cards, networking equipment, and more.

lang:en score:9 filesize: 355.98 K page_count: 17 document date: 2015-09-18

PART C.Hardware Periphery Compatibility		
1.Hard Drives		
1.1. SSD Devices		
Type	Model	
SATA 6G SSD	ADATA	AS511S3
		ES300-16G
		SP400-256G
		SA510-128G
		AS14-25SAT3-128G
	OCZ	OC11-25SAT3-256G
		VTR11-25SAT3-128G
		VTR14-25SAT3-128G
		VTR150-25SAT3-240G
		VTR160-25SAT3-240G
	APACER	VTX460A-25SAT3-240G
		ARC100-25SAT3-240G
		RACON-PT503-240G
		AS510S-128G
		CS504-240GBOS-BK
	CORSAIR	CS501-480GBA-BK
		NEUTRON-CT5-240G
		Crucial
		CF240MXVSSD1
		CF250MXVSSD1
	FUJITSU	LA58A-0T-128G
		FBB-128G
	GALAXY	GALAXY
		GALAXY
		GALAXY
	Intel	SS500CT160MKS
		SS500BWA60MKS
		SS500CT240MKS
		SS500BWA60MKS
		SS500BWA60MKS
	Kingmax	KM120GSM32
		HPPERLX-128G
		HPPERLX-51100G
		HP100G-128G
		SP300G-128G
	Kingston	SKC300S7A-128G
		SKC300S7A-128G
		SKC300S7A-128G
		SKC300S7A-128G
		SKC300S7A-128G
	Panasonic	SS300S7A-128G
		RP-SS300S7A-128G
		RP-SS300S7A-128G
		RP-SS300S7A-128G
		RP-SS300S7A-128G
	PLEXTOR	PL-480G-128G
		PL-480G-128G
		PL-480G-128G
		PL-480G-128G
		PL-480G-128G
	Patriot	PP300S7A-128G
		PP300S7A-128G
		PP300S7A-128G
		PP300S7A-128G
		PP300S7A-128G
	Runcore	RCP-V-128G-MC
		RCP-V-128G-MC
		RCP-V-128G-MC
		RCP-V-128G-MC
		RCP-V-128G-MC
	Samsung	MZ-7625605SPRO
		MZ-7625605SPRO
		MZ-7625605SPRO
		MZ-7625605SPRO
		MZ-7625605SPRO

[pdf] Safety Datasheet

Vista Procedure QTC Type SATA 6G SSD ADATA OCZ APACER CORSAIR Crucial FUJITSU GALAXY IntelIntel Kingmax Kingston Panasonic PLEXTOR PATRIOT RUNCORE SAMSUNG B150 PRO GAMING D3 Devices report dldcnet asus pub ASUS mb LGA1151 80

PART C.Hardware Periphery Compatibility 1.Hard Drives 1.1. SSD Devices Type SATA 6G SSD ADATA OCZ ... 3.0-32GB i-Disk Rex101-32GB Thunder 1-32GB FLEXI-DRIVE EXTREME DUO SDCZ80-16GB-Z46 Blaze B10 MARVEL-M60-64GB SFD213-USB-64GB EXPRESS RC4-USB 3.0-64GB T132-USB 3.0-64GB JetFlash 780 USM16SA1-16GB Model...

lang:de score:9 filesize: 457.28 K page_count: 18 document date: 2015-08-17

Type	Model
HGST	H020721S10L1630
	H020721S05L030
	H020724740AL1440
	H02072090AL0500
	H02072090AL0610
Seagate	ST1000DM002
	ST1000DM003
	ST1000DM007
	ST1000DM014
	ST1000DM009
	ST1000DM011
	ST1000DM003
	ST1000DM003
	ST1000DM004
	ST1000DM002
SATA 6G	ST1000DM002
	ST1000DM009
	ST1000DM006
	ST1000DM004
	ST1000DM004
TOSHIBA	DT01ACA150
	DT01ACA150
	DT01ACA150
	DT01ACA150
	DT01ACA150
	DT01ACA150
	DT01ACA150
	DT01ACA150
	DT01ACA150
	DT01ACA150
WD	WD1002FLEX
	WD1002FLEX
	WD1002FLEX
	WD1002FLEX
	WD1002FLEX
	WD1002FLEX
	WD1002FLEX
	WD1002FLEX
	WD1002FLEX
	WD1002FLEX

PRIME 2305S-C
PAGE 1

A comprehensive compatibility list for the ASUS PRIME J3355I-C motherboard, detailing supported Hard Drives (HDD/SSD), Power Supplies, USB Storage devices, Audio devices, Graphic Cards, Controller Cards, Ethernet devices, Wireless Networking devices, Fans and Heatsinks, Keyboards/mice, Optical Drives, Multi-function printer Devices, TV Tuner & Video Capture Cards, Input Devices (Apple, Android, Digital Cameras, Bluetooth Adapters, Tablets, Game Controllers, Web Cams), Display Devices (Monitors, Projectors), LVDS&eDP, UPS, Modems, and TPM.

lang:de score:9 filesize: 348.87 K page_count: 17 document date: 2017-07-06

PART C: Hardware Periphery Compatibility		
1. Hard Drives		
1.1. HDD Devices		
Type		Model
HGST		H4D72161DLA630
		H4D72195DLA630
		H4D7240ALAE440
		H4T17096ALAE600
		H4T72606ALAE610
		ST1000DLME
		ST1000DM003
		ST1000DM001
		ST1000LME4
		ST1000LMA01
Seagate		ST4000DM006
		ST1000DM001
		ST1000DM003
		ST1000NM.100
		ST1000NM.100.3
		ST1000NM.100.3
		ST1000NM.100.3
		ST1000NM.100.3
		ST1000NM.100.3
		ST1000NM.100.3
SATA 6G	TOSHIBA	DT01ACA002
		DT01ACA002
		DT01ACA002
		DT01ACA002
		DT01ACA002
		DT01ACA002
		DT01ACA002
		DT01ACA002
		DT01ACA002
		DT01ACA002
WD		WD1002FZRX
		WD1002FZRX
		WD1002FZRX
		WD1002FZRX
		WD1002FZRX
		WD1002FZRX
		WD1002FZRX
		WD1002FZRX
		WD1002FZRX
		WD1002FZRX
SATA 3G	HITACHI Seagate WD	H4D72161DLA630
		H4D72195DLA630
		H4D7240ALAE440
		H4T17096ALAE600
		H4T72606ALAE610
		ST1000DLME
		ST1000DM003
		ST1000DM001
		ST1000LME4
		ST1000LMA01

Vista Procedure QTC PRIME B250M K Devices report 20171109 dldcdnets asus pub ASUS mb LGA1151
PART C.Hardware Periphery Compatibility 1.Hard Drives 1.1. HDD Devices Type
SATA 6G SATA 3G HGST ... C MAGNUM 256GB T3-USB 3.0-32GB Thunder 1-
32GB SDCZ80-16GB-Z46 SDDDC-032G-G46 ADCZ88-128G-Z46 MARVEL-**M60**-
64GB EXPRESS RC4-USB 3.0-64GB T132-USB 3.0-64GB JetFlash 780
USM32GQX-32G AUC350 HXS3 CONNECT 31...

lang:de score:9 filesize: 304.37 K page_count: 18 document date: 2017-11-09

[illegible]

A comprehensive list of qualified vendors and their compatible models for various computer components, including power supplies, hard drives, SSDs, USB devices, audio devices, controller cards, networking equipment, fans, heatsinks, keyboards, mice, optical drives, printers, scanners, TV cards, input devices, and monitors, as provided by ASUSTeK Computer Inc.

lang:en score:9 filesize: 860.16 K page count: 18 document date: 2016-03-07

PART C.Hardware Periphery Compatibility		
1.Hard Drives		
1.1. SSD Devices		
Type	Model	
SATA 6G SSD	ADATA	AS51153
		AS51153
		SP510 128G
		SP510 128G
		SP510 128G
	OCZ	ADT4 25SAT3 128G
		OCZT1 25SAT3 128G
		VTR1 25SAT3 128G
		VTR1 25SAT3 128G
		VTR1 25SAT3 128G
	APACER	AS5105 128G
		AS5105 128G
		AS5105 128G
		AS5105 128G
		AS5105 128G
	CORSAIR	CM5105 128G
		CM5105 128G
		CM5105 128G
		CM5105 128G
		CM5105 128G
	Crucial	CT5105 128G
		CT5105 128G
		CT5105 128G
		CT5105 128G
		CT5105 128G
	FLUITSU	FS5105 128G
		FS5105 128G
		FS5105 128G
		FS5105 128G
		FS5105 128G
	GALAXY	GS5105 128G
		GS5105 128G
		GS5105 128G
		GS5105 128G
		GS5105 128G
	Intel	SS5105 128G
		SS5105 128G
		SS5105 128G
		SS5105 128G
		SS5105 128G
	Kingmax	KM5105 128G
		KM5105 128G
		KM5105 128G
		KM5105 128G
		KM5105 128G
	Kingston	SK5105 128G
		SK5105 128G
		SK5105 128G
		SK5105 128G
		SK5105 128G
	PLEKTOR	PL5105 128G
		PL5105 128G
		PL5105 128G
		PL5105 128G
		PL5105 128G
	PATRIOT	PT5105 128G
		PT5105 128G
		PT5105 128G
		PT5105 128G
		PT5105 128G
	RUNCORE	RC5105 128G
		RC5105 128G
		RC5105 128G
		RC5105 128G
		RC5105 128G
	SAMSUNG	SM5105 128G
		SM5105 128G
		SM5105 128G
		SM5105 128G
		SM5105 128G

[pdf] Safety Datasheet

Vista Procedure QTC B85M V5 PLUS Devices report dldcnet asus pub ASUS mb LGA1150

PART C.Hardware Periphery Compatibility 1.Hard Drives 1.1. SSD Devices Type SATA 6G SSD ADATA OCZ ... Disk Rex101-32GB Thunder 1-32GB FLEXI-DRIVE EXTREME DUO RAPID-CASE SDCZ80-16GB-Z46 Blaze B10 MARVEL-M60-64GB SFD201-USB3-8G SFD213-USB-64GB EXPRESS RC4-USB 3.0-64GB T132-USB 3.0-64GB JetFlash 780 USM3...

lang:de score:9 filesize: 454.65 K page_count: 18 document date: 2015-01-30

PART C.Hardware Periphery Compatibility		
1.Hard Drives		
1.1. SSD Devices		
Type	Model	
SATA 6G SSD	ADATA	AS51153
		AS51153
		SP510 128G
		SP510 128G
		SP510 128G
	OCZ	ADT4 25SAT3 128G
		OCZT1 25SAT3 128G
		VTR1 25SAT3 128G
		VTR1 25SAT3 128G
		VTR1 25SAT3 128G
	APACER	AS5105 128G
		AS5105 128G
		AS5105 128G
		AS5105 128G
		AS5105 128G
	CORSAIR	CM5105 128G
		CM5105 128G
		CM5105 128G
		CM5105 128G
		CM5105 128G
	Crucial	CT5105 128G
		CT5105 128G
		CT5105 128G
		CT5105 128G
		CT5105 128G
	FLUITSU	FS5105 128G
		FS5105 128G
		FS5105 128G
		FS5105 128G
		FS5105 128G
	GALAXY	GS5105 128G
		GS5105 128G
		GS5105 128G
		GS5105 128G
		GS5105 128G
	Intel	SS5105 128G
		SS5105 128G
		SS5105 128G
		SS5105 128G
		SS5105 128G
	Kingmax	KM5105 128G
		KM5105 128G
		KM5105 128G
		KM5105 128G
		KM5105 128G
	Kingston	SK5105 128G
		SK5105 128G
		SK5105 128G
		SK5105 128G
		SK5105 128G
	PLEKTOR	PL5105 128G
		PL5105 128G
		PL5105 128G
		PL5105 128G
		PL5105 128G
	PATRIOT	PT5105 128G
		PT5105 128G
		PT5105 128G
		PT5105 128G
		PT5105 128G
	RUNCORE	RC5105 128G
		RC5105 128G
		RC5105 128G
		RC5105 128G
		RC5105 128G
	SAMSUNG	SM5105 128G
		SM5105 128G
		SM5105 128G
		SM5105 128G
		SM5105 128G

ASUS Motherboard Hardware Compatibility List

A comprehensive list of compatible hardware peripherals for ASUS motherboards, including storage devices, power supplies, audio devices, and more.

lang:de score:9 filesize: 499.63 K page_count: 18 document date: 2015-04-08

PART C.Hardware Periphery Compatibility		
1.Power Supplies		
M.B Power Supply		
Type	Model	
M.B Power Supply	Avalon	AP 500 180W
		AP 500 180W
		AP 500 180W
		AP 500 180W
		AP 500 180W
	Antec	EA 500 180W
		EA 500 180W
		EA 500 180W
		EA 500 180W
		EA 500 180W
	Babek	BB 500 180W
		BB 500 180W
		BB 500 180W
		BB 500 180W
		BB 500 180W
	Century Star	CS 500 180W
		CS 500 180W
		CS 500 180W
		CS 500 180W
		CS 500 180W
	CodeMaster	CM 500 180W
		CM 500 180W
		CM 500 180W
		CM 500 180W
		CM 500 180W
	COMMANDER	CM 500 180W
		CM 500 180W
		CM 500 180W
		CM 500 180W
		CM 500 180W
	CORSAIR	CM 500 180W
		CM 500 180W
		CM 500 180W
		CM 500 180W
		CM 500 180W
	DELUX	DL 500 180W
		DL 500 180W
		DL 500 180W
		DL 500 180W
		DL 500 180W
	Enermax	EN 500 180W
		EN 500 180W
		EN 500 180W
		EN 500 180W
		EN 500 180W
	Envision	EV 500 180W
		EV 500 180W
		EV 500 180W
		EV 500 180W
		EV 500 180W
	FSP	FS 500 180W
		FS 500 180W
		FS 500 180W
		FS 500 180W
		FS 500 180W
	GoldenFish	GF 500 180W
		GF 500 180W
		GF 500 180W
		GF 500 180W
		GF 500 180W
	GreatWall	GW 500 180W
		GW 500 180W
		GW 500 180W
		GW 500 180W
		GW 500 180W
	HAMER	HM 500 180W
		HM 500 180W
		HM 500 180W
		HM 500 180W
		HM 500 180W
	Huntkey	HK 500 180W
		HK 500 180W
		HK 500 180W
		HK 500 180W
		HK 500 180W
	J-POWER	JP 500 180W
		JP 500 180W
		JP 500 180W
		JP 500 180W
		JP 500 180W
	LEPA	LP 500 180W
		LP 500 180W
		LP 500 180W
		LP 500 180W
		LP 500 180W
	ROCKWELL	RW 500 180W
		RW 500 180W
		RW 500 180W
		RW 500 180W
		RW 500 180W
	Seasonic	SE 500 180W
		SE 500 180W
		SE 500 180W
		SE 500 180W
		SE 500 180W
	SilverStone	SS 500 180W
		SS 500 180W
		SS 500 180W
		SS 500 180W
		SS 500 180W
	Super Flower	SF 500 180W
		SF 500 180W
		SF 500 180W
		SF 500 180W
		SF 500 180W

ASUS B85M-K PLUS Motherboard Hardware Periphery Compatibility List

A comprehensive compatibility list for the ASUS B85M-K PLUS motherboard, detailing compatible power supplies, hard drives, SSDs, graphics cards, peripherals, and other hardware components.

lang:en score:9 filesize: 416.39 K page_count: 17 document date: 2015-03-09

PART C.Hardware Periphery Compatibility	
1.Power Supplies	
Type	Model
Active	BP-150 180W
	CP-800
	CP-1000
	EA-3000
Antec	EA-550 GPE EN
	EA-750
	EA-750
AeroCool	PS-600W
BitFist	BT-1000 2X-600
Century Case	Big Powerwell 500
CoolerMaster	RS-400 SPWA-C3
	RS-200 800A-C3
	RS-200 SPWA-C3
	RS-400 800A-C3
COMMANDER	RS-700 P-CAL-E3
	RS-700 P-CAL-E3
CONSAIR	CMPSU-850W
DELUX	DLP-650PS
DI-HIGH	DHP-500W-GP-80P
Enertech	EN-300-ATX-300C
Enertech	EN-300-ATX-300C
FSP	AX-310H-RN
Gigabyte	GT-550W
Gigabyte	GT-550W
Gigabyte	GT-550W
Hanlin	Hanlin HK-400-550P 2.3+
Hanlin	Hanlin HK-400-550P 2.3+
J-POWER	JP-1000PS-M
LEPA	G1000-M
LEPA	G1000-M
ROSEWILL	RH-1000-M
Seasonic	SS-700W
Seasonic	SS-1000W
Seasonic	SS-1200W
Seventeam	ST-800P-M
Seventeam	ST-800P-M
Sigmatek	400W-15A-400P-M
Silicon	SST-510P-C3
Silicon	SST-510P-C3

ASUS H81M-P Motherboard Compatible Hardware List

A comprehensive compatibility list for hardware peripherals, including power supplies, storage devices, audio components, controller cards, networking equipment, and more, designed for the ASUS H81M-P motherboard.

lang:en score:9 filesize: 403.04 K page_count: 17 document date: 2014-11-14

PART C.Hardware Periphery Compatibility	
1.Hard Drives	
1.1. SSD Devices	
Type	Model
SATA 6G SSD	ADATA
	AS511S3
	AS511S3
	AS511S3
OCZ	OCZ1-25SAT3-256G
	OCZ1-25SAT3-256G
	OCZ1-25SAT3-256G
	OCZ1-25SAT3-256G
APACER	AS511S3
	AS511S3
	AS511S3
	AS511S3
CORSAIR	CMSSD F240GB-8K
	CMSSD F240GB-8K
	CMSSD F240GB-8K
	CMSSD F240GB-8K
Crucial	CT256M4SSD3
	CT256M4SSD3
	CT256M4SSD3
	CT256M4SSD3
FLEXTOR	F8B-120G
	F8B-120G
	F8B-120G
	F8B-120G
Intel	SSDSC2CT100A3
	SSDSC2CT100A3
	SSDSC2CT100A3
	SSDSC2CT100A3
Kingston	SM900 120GB
	SM900 120GB
	SM900 120GB
	SM900 120GB
Samsung	SM900 120GB
	SM900 120GB
	SM900 120GB
	SM900 120GB

[pdf] Safety Datasheet

Vista Procedure QTC J1800M A Devices report dlcndnet asus pub ASUS mb Intel CPU Onboard

PART C.Hardware Periphery Compatibility 1.Hard Drives 1.1. SSD Devices Type SATA 6G SSD ADATA OCZ ... Disk Rex101-32GB Thunder 1-32GB FLEXI-DRIVE EXTREME DUO RAPID-CASE SDCZ80-16GB-Z46 Blaze B10 MARVEL-M60-64GB SFD201-USB3-8G SFD213-USB-64GB T132-USB 3.0-64GB USM32GQX-32G USM16SA1-16GB Model TUH-300-H...

lang:de score:9 filesize: 482.01 K page_count: 16 document date: 2015-03-10

PART C.Hardware Periphery Compatibility	
1.Hard Drives	
1.1. SSD Devices	
Type	Model
SATA 6G SSD	ADATA
	AS511S3
	AS511S3
	AS511S3
OCZ	OCZ1-25SAT3-256G
	OCZ1-25SAT3-256G
	OCZ1-25SAT3-256G
	OCZ1-25SAT3-256G
APACER	AS511S3
	AS511S3
	AS511S3
	AS511S3
CORSAIR	CMSSD F240GB-8K
	CMSSD F240GB-8K
	CMSSD F240GB-8K
	CMSSD F240GB-8K
Crucial	CT256M4SSD3
	CT256M4SSD3
	CT256M4SSD3
	CT256M4SSD3
FLEXTOR	F8B-120G
	F8B-120G
	F8B-120G
	F8B-120G
Intel	SSDSC2CT100A3
	SSDSC2CT100A3
	SSDSC2CT100A3
	SSDSC2CT100A3
Kingston	SM900 120GB
	SM900 120GB
	SM900 120GB
	SM900 120GB
Samsung	SM900 120GB
	SM900 120GB
	SM900 120GB
	SM900 120GB

ASUS Motherboard Compatibility List: Peripherals and Components

A comprehensive compatibility report detailing various peripherals and components compatible with ASUS motherboards, including storage devices, power supplies, audio devices, graphics cards, and more.

lang:de score:9 filesize: 482.06 K page_count: 16 document date: 2015-03-10

