

PROEL V12FREE

Proel V12FREE Battery-Powered Complete Audio System

User Instruction Manual

1. INTRODUCTION

The Proel V12FREE is a versatile and portable battery-powered audio system designed for maximum freedom of use. It features a powerful 400W Class D amplifier, an integrated 3-channel mixer with effects and EQ, and an advanced MP3 player with Bluetooth connectivity. This system supports playback from SD cards, USB drives, or directly from your smartphone/tablet. It also includes two USB inputs for connecting Proel U24H or U24B 2.4 GHz digital wireless microphones (sold separately). With its integrated lithium-ion battery, the V12FREE offers up to 10 hours of operation without mains power. Its ultra-portable and lightweight design (11 kg) allows for easy transport with a removable handle and wheels, and it can be mounted on standard speaker stands.

2. IMPORTANT SAFETY INSTRUCTIONS

Please read and follow all safety instructions carefully before operating the Proel V12FREE. Keep this manual for future reference.

- **Power Source:** Only use the power adapter supplied with the unit. Ensure the voltage matches your local power supply.
- **Ventilation:** Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- **Water and Moisture:** Do not expose this apparatus to rain or moisture. Do not use near water.
- **Heat:** Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- **Cleaning:** Clean only with a dry cloth.
- **Servicing:** Do not attempt to service this product yourself. Refer all servicing to qualified service personnel.
- **Battery Care:** Do not expose the battery to excessive heat or direct sunlight. Charge the battery regularly, even if the unit is not in use, to maintain its lifespan.

3. PRODUCT OVERVIEW

3.1 Components and Controls

The Proel V12FREE is designed for intuitive operation. Familiarize yourself with the main components and control panel before use.



Figure 3.1: Front view of the Proel V12FREE portable audio system. This image shows the main speaker grille and the robust casing.



Figure 3.2: Rear view of the Proel V12FREE, highlighting the control panel, power input, and wheels for portability.



Figure 3.3: Detailed view of the Proel V12FREE control panel, showing the media player, input channels, EQ, effect controls, and battery level indicators.

3.2 Key Features

- Complete battery-powered audio system with MP3 player, USB port, SD slot, Bluetooth connection, and LCD display.
- Two MIC/LINE inputs plus one stereo Line input.
- Two USB inputs for use with U24H and U24B 2.4 GHz wireless microphones.
- One Line output.
- HIGH + LOW tone controls (EQ).

- Integrated effect processor.
- 400W Class D amplifier.
- 1" neodymium compression driver with horn and 12" woofer.
- Lithium-ion battery with 10-12 hours of autonomy.
- Compact and lightweight polypropylene cabinet with two wheels and a telescopic handle for easy transport.

4. SETUP GUIDE

4.1 Unpacking

Carefully remove the Proel V12FREE from its packaging. Inspect the unit for any signs of damage that may have occurred during transit. Retain the original packaging for future transport or storage.

4.2 Initial Charging

Before first use, it is recommended to fully charge the integrated lithium-ion battery. Connect the power cable to the AC input on the rear panel and plug it into a suitable power outlet. The battery level indicators on the control panel will show the charging status. A full charge typically takes several hours.

4.3 Placement

The V12FREE can be placed on a flat, stable surface or mounted on a standard speaker stand using the integrated pole mount. When using the telescopic handle and wheels for transport, ensure the handle is fully extended and locked into position for comfortable pulling.



Figure 4.1: The Proel V12FREE with its telescopic handle extended, ready for transport. The wheels at the base facilitate easy movement.



Figure 4.2: A hand demonstrating the ease of portability by pulling the Proel V12FREE using its extended telescopic handle and wheels.

4.4 Connecting Devices

The V12FREE offers various input options:

- **Microphone/Line Inputs (CH1, CH2):** Use XLR or 1/4" TRS cables to connect microphones or line-level instruments. Adjust the respective channel level knobs.
- **Stereo Line Input (CH3):** Use RCA cables to connect stereo audio sources like CD players or other media devices.
- **USB/SD Media Player:** Insert a USB drive or SD card into the dedicated slots on the media player section.
- **Bluetooth:** Pair your smartphone or tablet wirelessly (see Section 5.2).
- **Wireless Microphones:** Connect Proel U24H or U24B wireless microphone receivers to the dedicated USB inputs labeled 'WIRELESS 1' and 'WIRELESS 2'.



Figure 4.3: A close-up view of the USB port on the Proel V12FREE, demonstrating how a Proel U24 wireless microphone receiver can be connected for wireless audio input.

5. OPERATING INSTRUCTIONS

5.1 Power On/Off

To power on the unit, ensure all connections are secure, then flip the POWER switch located on the rear panel to the 'ON' position. The LCD display will illuminate, and the unit will initialize. To power off, flip the switch back to 'OFF'.

5.2 Bluetooth Connectivity

1. Ensure the V12FREE is powered on.
2. On the media player section, press the 'MODE' button until 'Bluetooth' is selected on the LCD display. The Bluetooth icon will flash, indicating it's in pairing mode.
3. On your smartphone or tablet, go to Bluetooth settings and search for available devices.
4. Select 'PROEL V12FREE' from the list. Once connected, the Bluetooth icon on the V12FREE's display will stop flashing and remain solid.
5. You can now play audio from your device through the V12FREE.

5.3 USB/SD Playback

1. Insert a USB flash drive into the USB port or an SD card into the SD slot on the media player.
2. The unit will automatically detect the media and display 'Play Music' on the LCD. If not, press the 'MODE' button to select USB or SD mode.
3. Use the 'PLAY/PAUSE', 'PREV', and 'NEXT' buttons to control playback.

5.4 Microphone and Line Inputs

Connect your microphones or line-level devices to the respective inputs (CH1, CH2, CH3). Adjust the individual channel level knobs to set the input volume. Use the 'MASTER' volume knob to control the overall output level of the system.

5.5 EQ and Effects

The V12FREE features HIGH and LOW tone controls (EQ) to adjust the treble and bass frequencies of the overall mix. Turn the 'HIGH' knob to boost or cut high frequencies and the 'LOW' knob for bass frequencies. The 'EFFECT' knob controls the level of the integrated digital effect, adding reverb or other spatial effects to your sound.

6. MAINTENANCE AND CARE

- **Cleaning:** Use a soft, dry cloth to clean the exterior of the unit. Do not use abrasive cleaners, waxes, or solvents.
- **Battery Care:** To maximize battery life, avoid fully discharging the battery frequently. Recharge the unit after each use. If storing for an extended period, charge the battery to approximately 50% and recharge every few months.
- **Storage:** Store the unit in a cool, dry place away from direct sunlight and extreme temperatures.
- **Transportation:** When transporting, ensure the telescopic handle is fully retracted or extended and locked. Use the wheels for easy movement.

7. TROUBLESHOOTING

If you encounter any issues with your Proel V12FREE, refer to the table below for common problems and their solutions.

Problem	Possible Cause	Solution
No power	Unit not plugged in; Power switch off; Battery depleted.	Ensure power cable is securely connected and plugged into a live outlet. Turn power switch ON. Charge the battery.
No sound output	Master volume too low; Input channel volume too low; Incorrect input selected; Device not connected properly.	Increase MASTER volume. Increase individual channel volume. Ensure correct input mode (Bluetooth, USB, Line) is selected. Check all cable connections.
Bluetooth not pairing	V12FREE not in pairing mode; Device too far; Bluetooth interference.	Ensure V12FREE is in Bluetooth pairing mode (flashing icon). Move device closer to the V12FREE. Turn off other Bluetooth devices nearby.
USB/SD playback issues	Unsupported file format; Corrupted media; Media not inserted correctly.	Ensure audio files are in supported formats (e.g., MP3). Try a different USB drive/SD card. Reinsert the media securely.
Distorted sound	Input level too high (clipping); Master volume too high; EQ settings incorrect.	Reduce input channel level. Reduce MASTER volume. Adjust HIGH/LOW EQ knobs to a neutral position or to taste.

8. TECHNICAL SPECIFICATIONS

Detailed specifications for the Proel V12FREE audio system.


Feature	Value
Model Number	V12FREE
Brand	PROEL
Maximum Speaker Output Power	400 Watts
Connectivity Technology	Bluetooth, USB
Speaker Type	Portable
Item Weight	11 Kilograms
Speaker Size	12 Inches
Power Source	Battery Powered
Battery Life	10-12 hours (Lithium-ion)
Amplifier Type	Class D
Inputs	2 x MIC/LINE (XLR/TRS), 1 x Stereo Line (RCA), 2 x USB (for wireless mics)

Feature	Value
Outputs	1 x Line Out
Media Player	USB, SD, Bluetooth, LCD display

9. WARRANTY AND CUSTOMER SUPPORT

PROEL products are manufactured to the highest quality standards. For information regarding warranty coverage, terms, and conditions, please refer to the warranty card included with your product or visit the official PROEL website. If you require technical assistance, spare parts, or have any questions not covered in this manual, please contact PROEL customer support or your authorized dealer. Please have your product model number (V12FREE) and purchase information ready when contacting support.

Related Documents

	PROEL SESSION1 Compact Portable Column System User Manual Comprehensive user manual for the PROEL SESSION1 compact portable column system, covering safety instructions, features, operation, installation, and technical specifications.
	Proel STONE30 Rock Garden Speaker User Manual User manual for the Proel STONE30 Rock Garden Speaker, detailing technical specifications, safety instructions, and installation guidelines.
	PROEL PLAYMIX Series Mixing Consoles User Manual Comprehensive user manual for the PROEL PLAYMIX series of mixing consoles (PLAYMIX 6, PLAYMIX 8, PLAYMIX 10), covering features, operation, safety, specifications, and troubleshooting.

	PROEL MQ16USB 16-Channel Mixer with Effects and USB - User Manual Comprehensive user manual for the PROEL MQ16USB, a 16-channel audio mixer featuring built-in effects and USB connectivity. This guide details all controls, connections, specifications, and operational instructions.
--	--

Documents - PROEL – V12FREE




[\[pdf\]](#) User Manual Instructions Specifications Declaration of Conformity Warranty

V FREE User s Manual PROEL SPA V12FREE SPEAKER 2AVZ9 2AVZ9V12FREE v12free

V10FREE **V12FREE** Battery Powered Portable Sound Systems USER S MANUAL
96MAN0150-REV.09/20 ENGLISH ITALIANO DISPOSAL OF OLD ELECTRICAL
ELECTRONIC EQUIPMENT 3 GENERAL SAFETY INSTRUCTIONS 3 IN CASE OF
FAULT 3 PACKAGING, SHIPPING AND COMPLAINT 3 WARRANTY AND
PRODUCTS RETURN 3 MAINTENANCE ...

lang:en **score:45** filesize: 1.72 M page_count: 21 document date: 2020-04-07

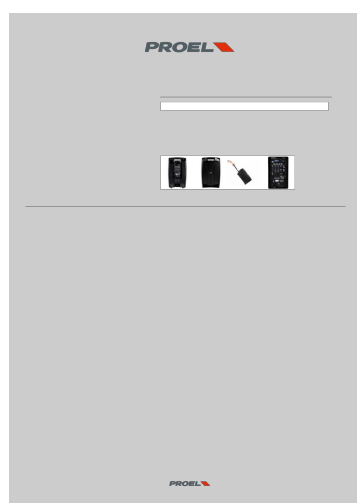


[\[pdf\]](#) Catalog

v12free Index of catalog view ps documents proel |||

V12FREE All-in-one battery powered sound system Description PROEL V FREE
systems gives you the freedom to perform your music or play your sound anywhere,
with a superb sound quality and without the hassle of laying down cables or finding a
power outlet. V10FREE and **V12FREE** are battery-powered portab...

lang:en **score:38** filesize: 28.68 K page_count: 2 document date: 2021-12-22

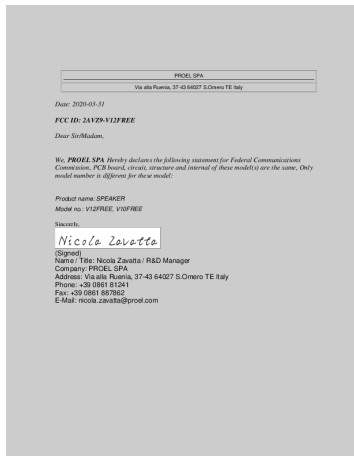

[\[pdf\]](#) Declaration of Conformity

Date siemic Declaration Letter of Model Difference PROEL SPA V12FREE SPEAKER 2AVZ9

2AVZ9V12FREE v12free

PROEL SPA Via alla Ruenia, 37-43 64027 S.Omero TE Italy Date: 2020-03-31 FCC ID: 2AVZ9-**V12FREE** Dear Sir/Madam, We, PROEL SPA Hereby declares the following statement for Federal Communications Commission, PCB board, circuit, structure and internal of these model s are the same, Only model number is ... lang:it score:36 filesize: 20.44 K page_count: 1 document date: 2020-04-07


[\[pdf\]](#) User Manual Instructions Specifications Decleration of Conformity Warranty

var www.html sideloads proel battery powered portable sound systems manual v10free v12free original V FREE User s Manual Strumenti Musicali Jun 16 2020 — DISPOSAL OF OLD ELECTRICAL ELECTRONIC EQUIPMENT This marking shown on the product or its literature indicates that it should not be disposed with 17 juin 96MAN0150 V10FREE V12FREE eng ita 694112 orionestore get attachment file 1189087 language 106 media discopiu files 7 20 attery Powered Portale Sound Systems USER S MANUAL Proel MANUALE D ISTRUZIONI ENG ITA ita7 ita2 ENGLISH ITALIANO REV 09 FlyMusic Trento PORTABLE SOUND SYSTEM en beta b2b image data documents play strumentimusicali net manuali 06 4c shop heuff nl docs Instrukcja obsługi V10Free od PLN 1669 00 2022 Porównanie cen Cenowarka Polska 7b38f3fc1da144ad5ad4539f53eef22a1c15 gzhls at blob ldb 6 a b 2 V12Free starting from £ 449 2023 Price Comparison Skinflint UK 694113 B2B and are featuring multiple inputs versatile MP3 player BLUETOOTH connectivity Hosted in contents ITAV10FREE B2Bv10free ita7v10free ita2Proel Manualאסכול V10FREE 20V10FREE 20FlyMusic TrentoV10FREE in 17 —Proel Polskaאסכול itaplay enproel itaorionestore 106beta itashop ita7shop ita2gzhls 7b38f3fc1da144ad5ad4539f53eef22a1c15media itagzhls 7b38f3fc1da144ad5ad4539f53eef22a1c15beta itaproel itamedia originalmedia originalproel itacontents in PROEL Portable All in One Battery 10” Loudspeaker MS THE MIX SHARING17 env1v10free itathemixofsharing 2024 04 אסכולAll one system System PROELProel אסכולV12 Combo Speaker V12FREEAll ||| V10FREE **V12FREE** Battery Powered Portable Sound Systems USER S MANUAL 96MAN0150-REV.09/20 ENGLISH ITALIANO DISPOSAL OF OLD ELECTRICAL ELECTRONIC EQUIPMENT 3 GENERAL SAFETY INSTRUCTIONS 3 IN CASE OF FAULT 3 PACKAGING, SHIPPING AND COMPLAINT 3 WARRANTY AND PRODUCTS RETURN 3 MAINTENANCE ... lang:en score:36 filesize: 1.74 M page_count: document date:





[\[pdf\]](#) User Manual Instructions Specifications Decleration of Conformity Warranty
V FREE User's Manual PROEL attery Powered Portale Sound Systems USER'S MANUAL< b> Read this manual< entirel and presere it for future referene When using an Ç eletri produt asi preautions should ala Çs e taken including the folloing: • To redue risk lose super Àision is neessar hen th used near hildren
480412_96man0150_v10free_v12free_eng_ita im static-thomann de pics atg atgdata document manual
480411_96man0150_v10free_v12free_eng_ita images DISPOSAL OF OLD ELECTRICAL & ELECTRONIC EQUIPMENT This marking shown on product or its literature indicates that not be disposed with
V10FREE **V12FREE** Battery Powered Portable Sound Systems USER S MANUAL
96MAN0150-REV.09/20 ENGLISH ITALIANO DISPOSAL OF OLD ELECTRICAL ELECTRONIC EQUIPMENT 3 GENERAL SAFETY INSTRUCTIONS 3 IN CASE OF FAULT 3 PACKAGING, SHIPPING AND COMPLAINT 3 WARRANTY AND PRODUCTS RETURN 3 MAINTENANCE ...
lang:en **score:35** filesize: 1.69 M page_count: 20 document date: 2020-08-24

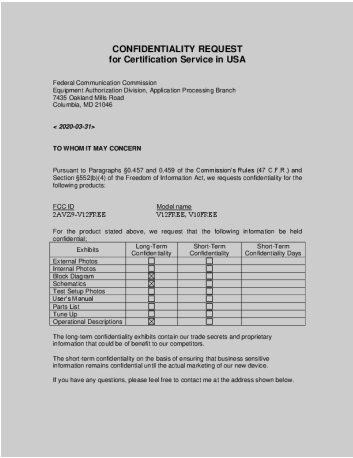

[\[pdf\]](#) Confidentiality Request Letter
SAMPLE CONFIDENTIALITY FORM Monika Mayr FCC Confidentiality request letter PROEL SPA
V12FREE SPEAKER 2AVZ9 2AVZ9V12FREE v12free
CONFIDENTIALITY REQUEST for Certification Service in USA Federal Communication Commission Equipment ... e Freedom of Information Act, we requests confidentiality for the following products: FCC ID 2AVZ9-**V12FREE** Model name **V12FREE**, V10FREE For the product stated above, we request that the following in...
lang:en **score:34** filesize: 89.37 K page_count: 2 document date: 2020-04-07



[\[pdf\]](#) User Manual
V10FREE V12FREE Thomann 2022 04 23 — ENTSORGUNG VON ELEKTRO UND ELEKTRONIK ALTGERÄTEN Diese Kennzeichnung auf dem Produkt oder in der Literatur weist darauf hin dass das
480412 480411d images static thomann de pics atg atgdata document manual |||
V10FREE **V12FREE** Batteriebetriebenen Tragbare Sound-Systeme BENUTZERHANDBUCH 96MAN0150-REV.10/22 DEUTSCH 2 ZUSAMMENFASSUNG ENTSORGUNG VON ELEKTRO- UND ELEKTRONIK-ALTGERTEN 4 ALLGEMEINE SICHERHEITSHINWEISE 4 IM FALLE EINER STRUNG 4 VERPACKUNG, VERSAND UND REKLAMATION4 GARANTIE UND PRODUKTRCKGABE 5...
lang:de **score:34** filesize: 2.4 M page_count: 14 document date: 2022-03-24




[\[pdf\]](#) User Manual

V10FREE V12FREE beta b2b proel 5 Proel ist nicht verantwortlich für Schäden die während des Transports auftreten Die Produkte werden ab Lager verkauft und der Versand erfolgt auf Kosten Gefahr Käufers 96MAN0150 de image data documents |||

V10FREE **V12FREE** Batteriebetriebene Tragbare Sound-Systeme
BENUTZERHANDBUCH 96MAN0150-REV.10/22 DEUTSCH 2
ZUSAMMENFASSUNG ENTSORGUNG VON ELEKTRO- UND ELEKTRONIK-
ALTGERÄTEN 4 ALLGEMEINE SICHERHEITSHINWEISE 4 IM FALLE EINER
STÖRUNG 4 VERPACKUNG, VERSAND UND REKLAMATION 4 GARANTIE UND
PRODUKTRÜCKGABE 5...

lang:de **score:33** filesize: 2.4 M page_count: 14 document date: 2022-03-24

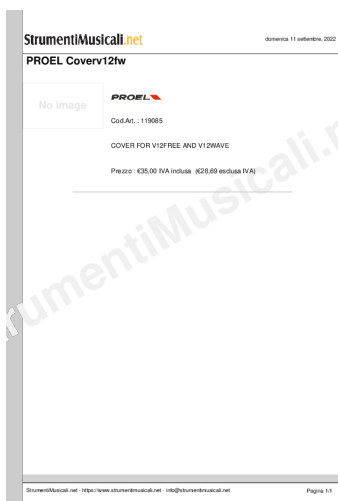


[\[pdf\]](#) Datasheet Declaration of Conformity

PROEL Coverv12fw No image Strumenti Musicali 1 giorno fa — Page StrumentiMusicali.net venerdì 09 settembre 2022 Cod Art : 119085 COVER FOR V12FREE AND V12WAVE doc strumentimusicali datasheet products id |||

PROEL Coverv12fw domenica 11 settembre, 2022 No image Cod.Art. : 119085
COVER FOR **V12FREE** AND V12WAVE trumentiMusicali.n Prezzo : 35,00 IVA
inclusa 28,69 esclusa IVA StrumentiMusicali.net - <https://www.strumentimusicali.net> -
info strumentimusicali.net Pagina 1/1 ...

lang:de **score:30** filesize: 14.99 K page_count: 1 document date: 2022-09-11

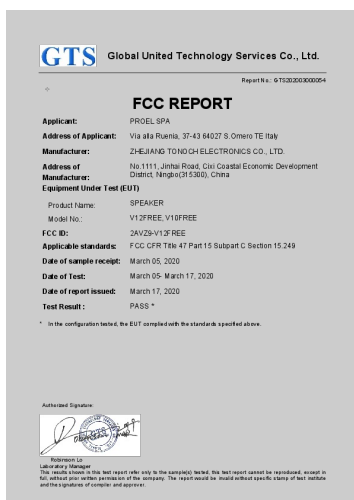

[\[pdf\]](#) Test Report

Microsoft Word GTS202003000054 FCC 15 249 BT EDR Administrator Test Report DXX PROEL SPA
V12FREE SPEAKER 2AVZ9 2AVZ9V12FREE v12free

Global United Technology Services Co., Ltd. Report No.: GTS202003000054 FCC
REPORT Applicant: P ... China Equipment Under Test EUT Product Name: Model
No.: FCC ID: Applicable standards: SPEAKER **V12FREE**, V10FREE
2AVZ9-**V12FREE** FCC CFR Title 47 Part 15 Subpart C Section 15.249 Date of
sample rec...

lang:en **score:28** filesize: 1.75 M page_count: 36 document date: 2020-04-07



[pdf] Label

Microsoft Word Label Administrator label and location PROEL SPA V12FREE SPEAKER 2AVZ9 2AVZ9V12FREE v12free

Label Location 4cm Model: **V12FREE** FCC ID: 2AVZ9-**V12FREE** This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: 1 This device may not cause harmful interference, and 2 this device must accept any interference received, including interference tha...

lang:en score:28 filesize: 86.41 K page_count: 1 document date: 2020-03-31



[pdf] Specifications Datasheet Warranty

480411_proel_free_datasheet images static-thomann de pics atg atgdata document specs proel V FREE SERIES www.proel.com om the date of purchase The product must be reg YEARS WARRANTY 2 yea ... b sound quality and without the hassle of laying down cables or finding a power outlet. V10FREE and **V12FREE** are battery-powered portable sound systems featuring a powerful 400W amplifier, a built-in 3... lang:en score:27 filesize: 823.99 K page_count: 6 document date: 2020-08-24


TECHNICAL SPECIFICATIONS	
V10FREE	V12FREE
AMBIER Section	
MONO inputs	2 x MIC/LINE IN (XLR-F + 1.4" JACK)
STEREO input	1 x LINE IN (2xRCA + 1/8" MINI-JACK)
WIRELESS inputs	2 x USB TYPE-A
Outputs	MONO LINE OUT (1.4" JACK)
Main EQ	2-band EQ (HIGH + LOW)
MULTIMEDIA Section	
Player Type	USB / SD / BLUETOOTH player
Compatible File Formats	MP3, WMA, M4A
Control Interface	LCD display, CONTROL buttons
AMPLIFIER Section	
Total Peak Power	400 W
Continuous Power	200 W
Amplifier Type	Class D
Power Supply	SMPS
Processing	Analogue
LOUDSPEAKER Section	
System Type	2-way vented enclosure
High Frequency Driver	1" horn loaded neodymium compression driver
Low Frequency Driver	10" woofer with 1.5" VC
Angular Coverage	90° H x 60° V
Frequency Response	60 Hz - 20 kHz
Max SPL	122 dB
GENERAL Specifications	
Construction	Polypropylene
Cabinet Color	Black
Handles	1 x top, 1 x top retractable
Wheels	2 x rear
Mounting Pole	3 x bottom
Dimensions (W x H x D)	380 x 524 x 206 mm
Weight	11 kg (24.3 lb.)
Li-Ion Battery	11.1 V / 8000 mAh
Battery Recharging Time	6-8 hours*
Battery Working Time	10-12 hours**
Power Supply	100-240 V ~ 50/60 Hz
Rated Consumption	350 W

[pdf] Specifications Dimension Guide

PROEL V12FREE 12 400 VFREE SPEC sounddd shop Specification |||

TECHNICAL SPECIFICATIONS V10FREE **V12FREE** MIXER Section MONO inputs 2 x MIC/LINE IN XLR-F 1.4 JACK STEREO input 1 x LINE IN 2xRCA MINI-JACK WIRELESS inputs 2 x USB TYPE-A Outputs MONO LINE OUT 1.4 JACK Main EQ 2-band EQ HIGH LOW MULTIMEDIA Section Player Type USB / SD /...


lang:en score:25 filesize: 280.98 K page_count: 1 document date: 2020-11-20

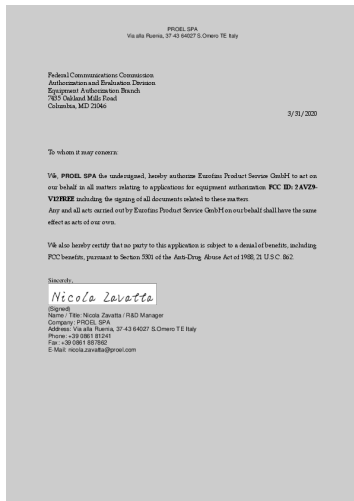

[pdf]

COMPANY LETTERHEAD Baschin FCC POA PROEL SPA V12FREE SPEAKER 2AVZ9
2AVZ9V12FREE v12free

PROEL SPA Via alla Ruenia, 37-43 64027 S.Omero TE Italy Federal
Communications Commission Authoriza ... act on our behalf in all matters relating to
applications for equipment authorization FCC ID: 2AVZ9**V12FREE** including the
signing of all documents related to these matters. Any and all acts carried ou...
lang:en score:24 filesize: 57.81 K page_count: 1 document date: 2020-04-07

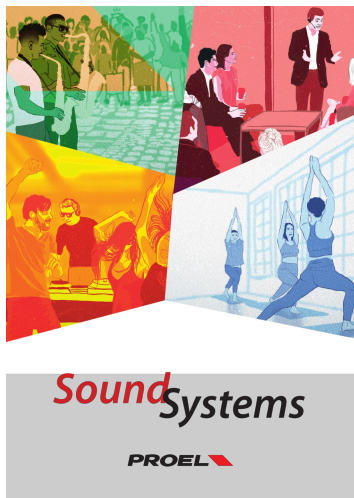

[pdf] Warranty Catalog

SCARICA IL CATALOGO proel sound landing it SSCAT21IE SOUND SYSTEMS 2021 beta b2b image
data catalogues |||

SoundSystems General Index Mixers 04 MQ series Stage Gear 10 DB series 11 100
series Processors 1 ... ss microphones OPTIONAL ACCESSORIES COVER V10FW
Cover for V10FREE and V10WAVE COVER V12FW Cover for **V12FREE** and
V12WAVE 2277 om the date of purchase The product must be reg YEARS
WARRANTY 2 years ...

lang:en score:24 filesize: 21.89 M page_count: 68 document date: 2021-11-03



[pdf] Warranty Catalog

SoundSystems Proel 77 MQ12USB BAGMQ12FX RACKMQ12USB Compact 12 input 4 bus mixer with
effect and USB I F MONO MIC LINE inputs 2 STEREO 6 low noise very high headroom microphone
preamplifiers PHANTOM power 'One knob COMPRESSOR LED indicator on channels 3 band EQ sweep
mids LO CUT filter 1 AUX send pre fader SSCAT20IE SOUND SYSTEMS 2020 LR proel image data
catalogues |||

SoundSystems General Index Mixers 04 MQ series Stage Gear 10 DB series 11 100
series Processors 1 ... b sound quality and without the hassle of laying down cables
or finding a power outlet. V10FREE and **V12FREE** are battery-powered portable
sound systems featuring a powerful 400W amplifier, a built-in 3...

lang:en score:22 filesize: 6.61 M page_count: 60 document date: 2020-03-10




[\[pdf\]](#) Product Photos

Microsoft Word FCC 15 249 BT EDR Administrator External photos PROEL SPA V12FREE SPEAKER 2AVZ9 2AVZ9V12FREE v12free

9 EUT Constructional Details Report No.: GTS202003000054 Global United Technology Services Co., Ltd. No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Telephone: 86 0 755 2779 8480 Fax: 86 0 755 2779 8...

lang:en score:14 filesize: 385.81 K page_count: 3 document date: 2020-03-19

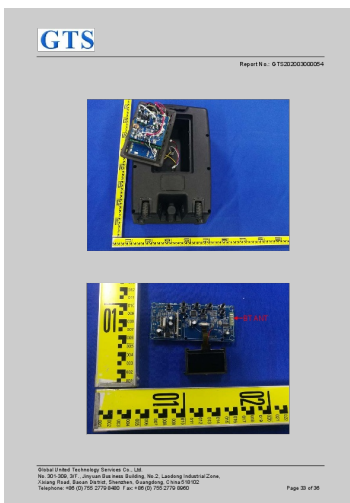

[\[pdf\]](#) Product Photos Teardown

Microsoft Word FCC 15 249 BT EDR Administrator Internal Photos PROEL SPA V12FREE SPEAKER 2AVZ9 2AVZ9V12FREE v12free

Report No.: GTS202003000054 BT ANT Global United Technology Services Co., Ltd. No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Telephone: 86 0 755 2779 8480 Fax: 86 0 755 2779 8960 Page 33 of 36 R...

lang:en score:14 filesize: 637.71 K page_count: 4 document date: 2020-03-19

8 Test Setup Photo

[\[pdf\]](#) Product Photos

Microsoft Word FCC 15 249 BT EDR Administrator Test Setup Photos PROEL SPA V12FREE SPEAKER
2AVZ9 2AVZ9V12FREE v12free

8 Test Setup Photo Report No.: GTS20200300054 Global United Technology
Services Co., Ltd. No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong
Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102
Telephone: 86 0 755 2779 8480 Fax: 86 0 755 2779 8960 Page ...
lang:tl score:14 filesize: 216.95 K page_count: 2 document date: 2020-03-19