

[Manuals.plus](#) /

› [XWNV](#) /

› XWNV 42V AC/DC Adapter Charger Instruction Manual for NAVEE V40/V50/V25 Electric Scooters

XWNV NKT2208-D32 / NKT2211-D32

XWNV 42V AC/DC Adapter Charger Instruction Manual

Compatible with NAVEE V40 / V50 / V25 Electric Scooters

1. INTRODUCTION

Thank you for choosing the XWNV 42V AC/DC Adapter Charger. This manual provides essential information for the safe and efficient use of your new charger. Please read these instructions carefully before use and retain them for future reference.

2. SAFETY INFORMATION

To ensure safe operation and prevent damage, observe the following safety precautions:

- This charger is designed for indoor use only.
- Ensure the input voltage (100-240V AC) matches your local power supply.
- Do not expose the charger to water, moisture, or extreme temperatures.
- Avoid placing the charger on heat-sensitive surfaces or near flammable materials.
- Do not disassemble or modify the charger. Refer all servicing to qualified personnel.
- Unplug the charger from the power outlet when not in use or during electrical storms.
- The charger features Over Voltage Protection, Over Current Protection, Short Circuit Protection, Over Temperature Protection, and Over Load Protection to safeguard your devices.

Safety Protections



Over Temperature
Protection



Short Circuit
Protection



Over Voltage
Protection



Over Current
Protection



Over Load
Protection

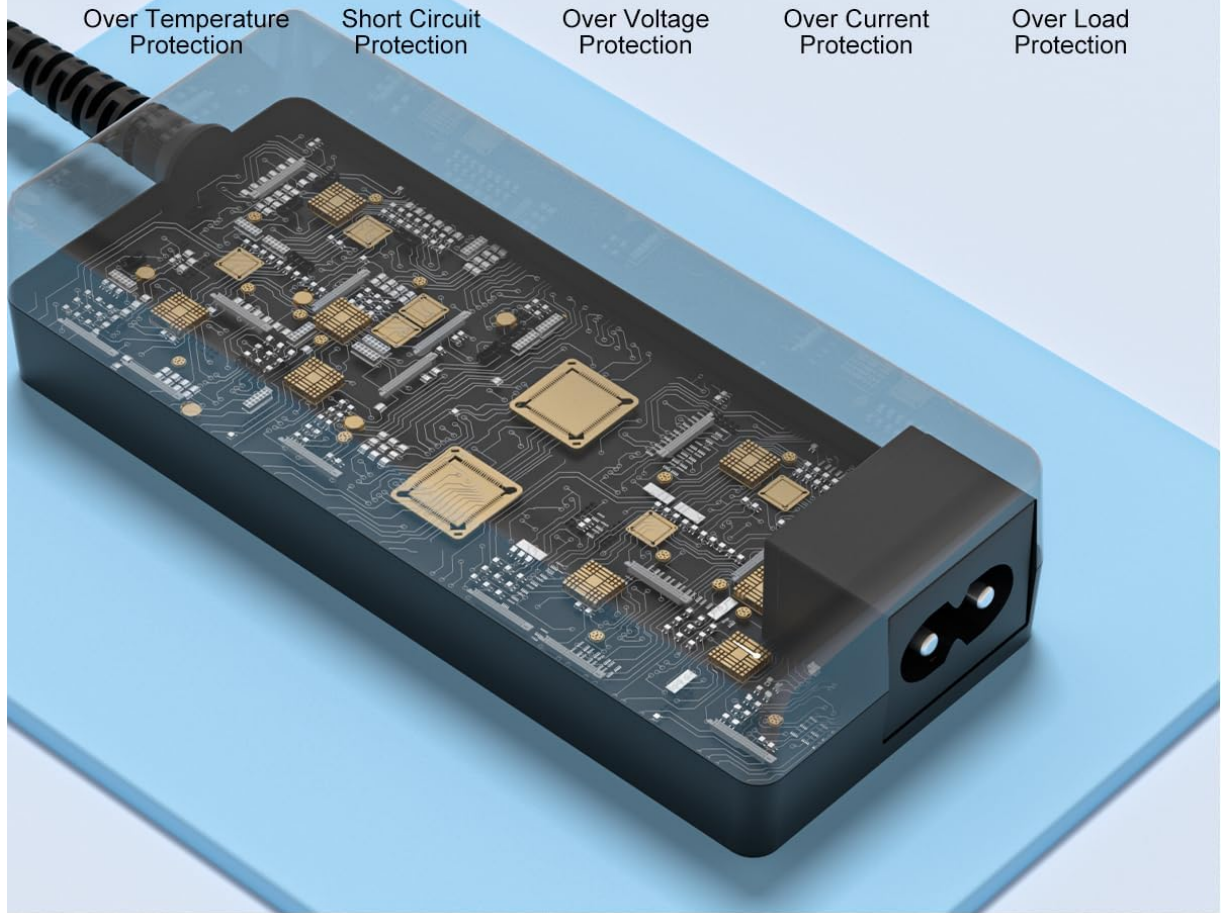


Image: The charger incorporates multiple safety features including protection against over temperature, short circuits, over voltage, over current, and over load. It is suitable for various compatible devices.

3. PACKAGE CONTENTS

Please verify that all items are present in the package:

- 1 x XWNV 42V AC/DC Adapter Charger
- 2 x USB Cable

4. SETUP

Follow these steps to set up your charger:

1. Unpack the AC/DC adapter and power cord from the packaging.
2. Connect the power cord to the AC input port on the adapter.
3. Plug the power cord into a standard 100-240V AC wall outlet.
4. Connect the round DC output connector of the adapter to the charging port of your compatible device (e.g., NAVEE V40/V50/V25 Electric Scooter).
5. Ensure all connections are firm and secure.

Detail Display

7FT replacement
power cord



Stable Output.
Firm Connect

Orbital Interface



Image: A detailed display of the charger components, including the 7-foot power cord, the adapter unit, and the round DC connector, highlighting stable output and firm connection.



Image: The charger connected to a wall outlet, illustrating its use in a charging scenario.

5. OPERATING INSTRUCTIONS

Once properly connected, the charger will begin to supply power to your device. Observe the following for optimal operation:

- Monitor the charging indicator on your device (if available) to determine charging status.
- Avoid interrupting the charging cycle frequently.
- The charger is designed for continuous use but should be kept in a well-ventilated area.

6. MAINTENANCE

Proper maintenance ensures the longevity of your charger:

- Keep the charger in a suitable ventilating and humidity-controlled environment.
- Do not place the charger on soft surfaces like beds or carpets, which can obstruct ventilation.
- Clean the charger periodically with a dry, soft cloth. Do not use liquid cleaners.

- Inspect the power cord and connectors regularly for any signs of damage. If damaged, discontinue use and replace.

7. TROUBLESHOOTING

If you encounter issues, refer to the following common solutions:

- **Charger not working:** Ensure the power cord is securely plugged into both the wall outlet and the adapter. Verify the wall outlet is functional.
- **Device not charging:** Confirm that the DC output connector is fully inserted into your device's charging port. Check if your device's charging port is clean and free of debris.
- **Incorrect fit:** Before purchasing, always confirm the output voltage, current, and plug size match your device's requirements. This charger provides 42V output with a round connector.
- **Overheating:** Ensure the charger is in a well-ventilated area and not covered. If overheating persists, discontinue use and contact support.

8. SPECIFICATIONS

Brand	XWNV
Input Voltage	100V - 240V AC, 50/60Hz
Output Voltage	42 Volts
Cable Length	7 feet (approx. 2.1 meters)
Connector Type	Round
Special Features	Over Voltage Protection, Over Current Protection, Short Circuit Protection, Over Temperature Protection, Over Load Protection
Color	Black
Item Weight	9 Ounces (approx. 255 grams)
Manufacturer	Dongguan Lewe Electronics Co. , LTD

COMPACT DESIGN

Small and lightweight to carry



Image: The charger's compact and lightweight design, making it easy to carry and store.

9. WARRANTY AND SUPPORT

This XWNV charger comes with a **3-year warranty** from the date of purchase, covering manufacturing defects.

For any questions, concerns, or technical support regarding your product, please contact the seller directly. We are committed to assisting you.