

[Manuals.plus](#) /

› [SCHWAIGER](#) /

› SCHWAIGER -661828- LED Floor Lamp User Manual

SCHWAIGER 661828

SCHWAIGER -661828- LED Floor Lamp with Bluetooth Speaker

USER MANUAL

Model: 661828 | Brand: SCHWAIGER

Introduction

Thank you for choosing the SCHWAIGER -661828- LED Floor Lamp. This versatile lamp is designed for both indoor and outdoor use, providing ambient lighting and high-quality audio through its integrated Bluetooth speakers. Featuring a durable, splash-proof design (IP44), a powerful 2200 mAh rechargeable battery, and convenient remote control, this lamp is perfect for enhancing your garden, balcony, or any living space. This manual provides essential information for safe operation, setup, and maintenance of your new device.

Safety Instructions

Please read these safety instructions carefully before using the product. Failure to follow these instructions may result in electric shock, fire, or serious injury.

- **Outdoor Use:** Ensure the USB-C charging port cover is securely closed when used outdoors to maintain IP44 splash protection.
- **Power Source:** Only use the provided USB-C cable for charging. Do not use damaged cables or chargers.
- **Battery Care:** Do not expose the battery to extreme temperatures, direct sunlight for prolonged periods, or fire. Do not disassemble or puncture the battery.
- **Cleaning:** Disconnect the lamp from any power source before cleaning. Use a soft, damp cloth. Do not use abrasive cleaners or solvents.
- **Water Exposure:** While splash-proof (IP44), do not submerge the lamp in water or expose it to heavy rain for extended periods.
- **Repairs:** Do not attempt to repair the device yourself. Refer all servicing to qualified personnel.
- **Children:** Keep the device and its accessories out of reach of children. The remote control contains a button cell battery which can be a choking hazard.

Package Contents

Please check the package contents upon unboxing to ensure all components are present and undamaged.

- LED Solar Lampshade (with integrated solar panel and speakers)
- 3-part Lamp Stand
- Lamp Base
- Remote Control (with CR2025 button cell battery)
- USB-C Charging Cable
- Instruction Manual

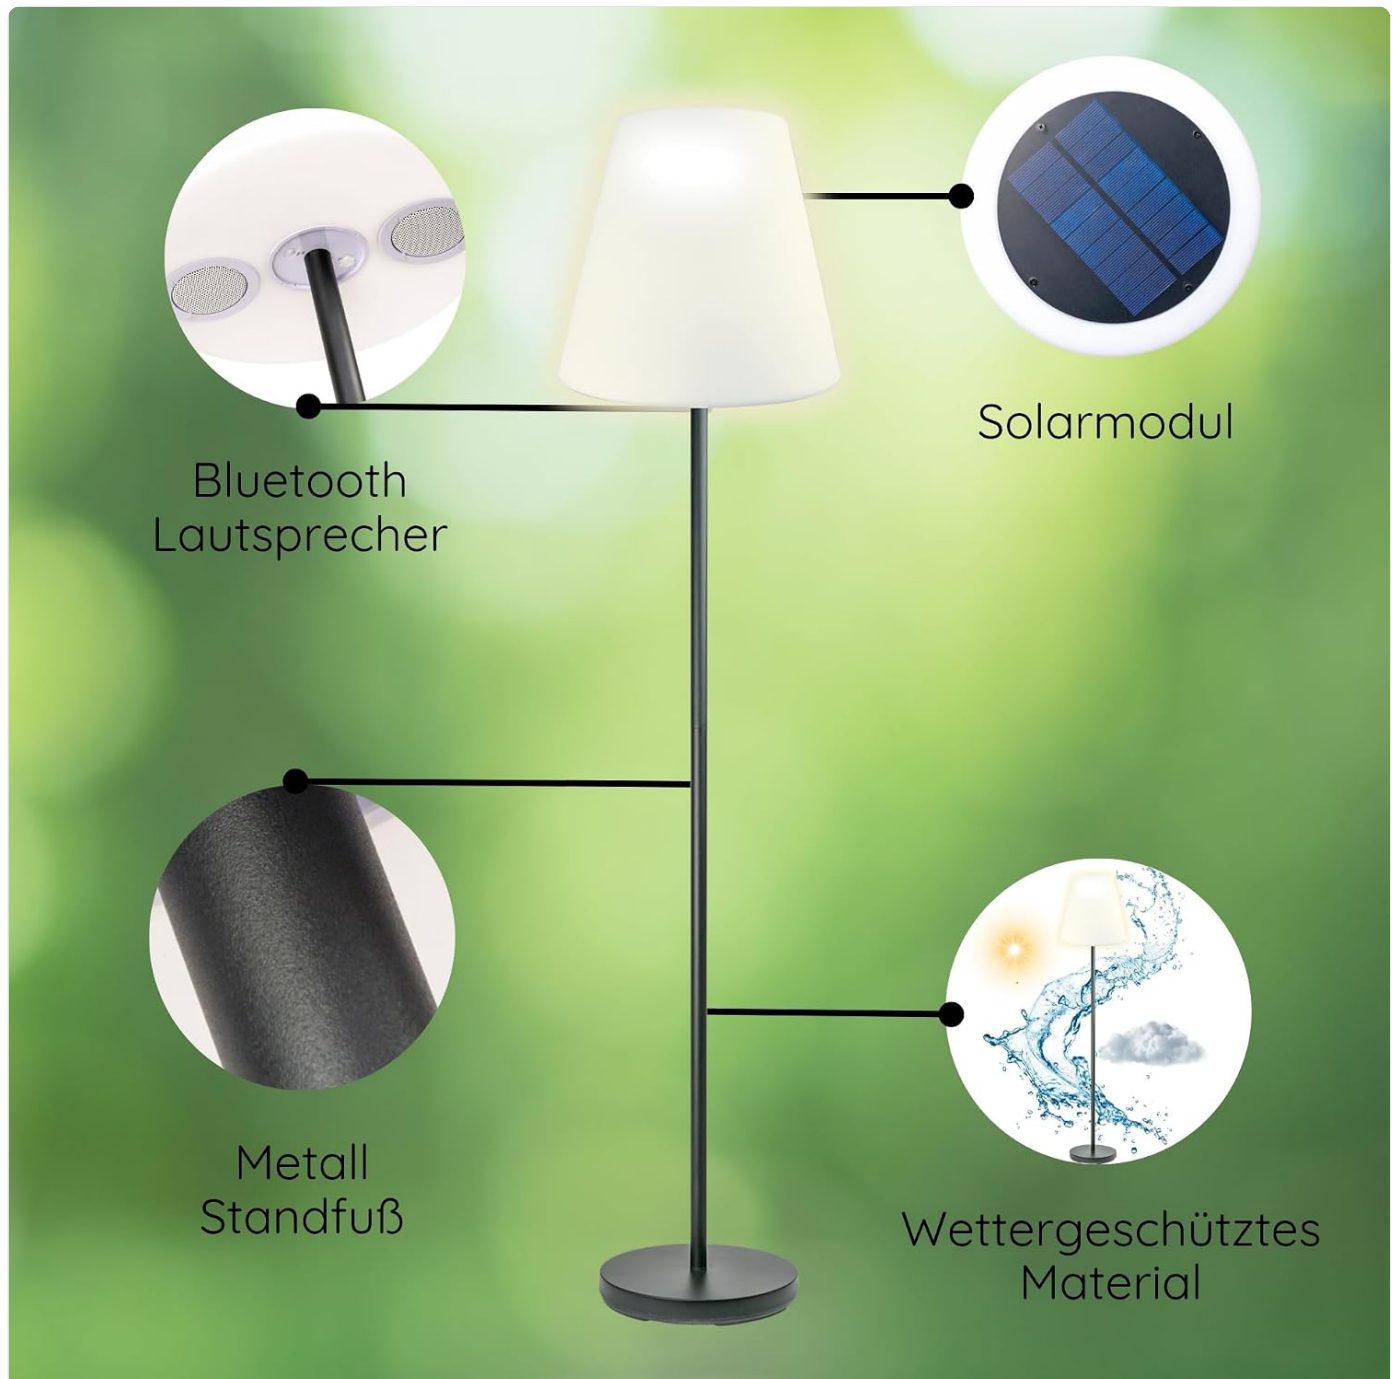


Image: Key components of the SCHWAIGER LED Floor Lamp, including the solar module, Bluetooth speaker, robust metal base, and weather-resistant materials.

Setup

Follow these steps to assemble your SCHWAIGER LED Floor Lamp.

1. **Assemble the Lamp Stand:** Carefully screw the three parts of the lamp stand together. Ensure they are securely

tightened.

2. **Attach the Lamp Base:** Screw the assembled lamp stand into the lamp base. Make sure it is stable and upright.
3. **Attach the Lampshade:** Carefully place the LED solar lampshade onto the top of the assembled lamp stand. Ensure the cable from the lampshade is properly routed through the stand and connected if necessary (refer to the diagram on the underside of the lampshade for connection points).
4. **Initial Charge:** Before first use, it is recommended to fully charge the lamp using the provided USB-C cable. Connect the USB-C cable to the charging port located on the underside of the lampshade and plug the other end into a suitable USB power adapter (not included). A full charge takes approximately 4 hours.



Image: The fully assembled SCHWAIGER LED Floor Lamp, ready for use.



Image: Dimensions of the lamp, indicating a height of 150 cm and a width of 34 cm.

Operating Instructions

Learn how to use the lighting and Bluetooth speaker functions of your lamp.

Power On/Off and Charging

- **Power Switch:** Locate the ON/OFF switch on the underside of the lampshade. Slide it to the "ON" position to activate the lamp.
- **Solar Charging:** The integrated solar panel on top of the lampshade will charge the battery automatically when exposed to direct sunlight. Ensure the solar panel is clean and unobstructed for optimal charging.
- **USB-C Charging:** For faster charging or when sunlight is insufficient, use the provided USB-C cable. The charging port is next to the power switch on the underside of the lampshade.
- **Battery Life:** A fully charged 2200 mAh battery provides up to 6 hours of operation.



Image: Detail of the power switch and USB-C charging port on the lamp's underside.

Lighting Control (Remote Control)

The lamp features 12 x RGB LEDs with 8 watts and 200 lumens, offering various color options and modes controlled by the remote.

- **Power Button:** Press the power button on the remote to turn the light on or off.
- **Color Selection:** Use the color buttons on the remote to select your desired static color.
- **Brightness Adjustment:** Use the brightness up/down buttons to adjust the light intensity.
- **Mode Selection:** The remote offers 4 lighting modes (e.g., flash, strobe, fade, smooth). Press the mode buttons to cycle through them.

Bluetooth Speaker Operation

The lamp includes 2 x 5 watt stereo speakers for wireless music playback.

- **Pairing:** With the lamp powered on, activate Bluetooth on your smartphone or audio device. Search for "SCHWAIGER 661828" (or similar name) in the list of available devices and select it to pair. A confirmation sound will indicate successful pairing.
- **Music Playback:** Once paired, you can play music from your device. The remote control can also be used to control music playback (play/pause, next/previous track, volume up/down).

- **Volume Control:** Adjust the volume using your connected device or the remote control.



Image: The lamp providing ambient light and music on a patio at night.

**Genießen Sie eine angenehme Beleuchtung
zusammen mit Ihrer Lieblingsmusik!**



Image: Two lamps enhancing an outdoor seating area with light and sound.



Image: Versatile usage scenarios for the lamp, including indoor and outdoor environments.

Maintenance

- **Cleaning:** Wipe the lamp surface with a soft, damp cloth. Do not use harsh chemicals or abrasive materials. Ensure the solar panel is kept clean for efficient charging.
- **Battery Care:** To prolong battery life, avoid fully discharging the battery frequently. If storing the lamp for an extended period, charge it fully every 3-6 months.
- **Storage:** Store the lamp in a cool, dry place when not in use, especially during winter months if used outdoors.
- **Remote Control Battery:** If the remote control stops responding, replace the CR2025 button cell battery. Ensure correct polarity when inserting the new battery.

Troubleshooting

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Lamp does not turn on.	Battery is depleted; Power switch is OFF; Remote control battery is dead.	Charge the lamp via USB-C or place in direct sunlight; Ensure power switch is ON; Replace remote control battery.
Bluetooth not connecting.	Lamp is not in pairing mode; Device is too far; Already connected to another device.	Ensure lamp is ON; Move device closer to the lamp; Disconnect from other devices and try pairing again.
Light is dim or flickers.	Low battery; Dirty solar panel.	Charge the lamp; Clean the solar panel.
Remote control not working.	Battery is dead; Obstruction between remote and lamp; Remote is too far.	Replace CR2025 battery; Ensure clear line of sight; Move closer to the lamp.

Specifications

Feature	Detail
Model Number	661828
Brand	SCHWAIGER
Dimensions (H x W x D)	149 cm x 34 cm x 34 cm
Weight	5.3 kg
Material	Metal (base), PE plastic UV-resistant (lampshade)
Light Source	12 x RGB LEDs
Light Output	8 Watts, 200 Lumens
Color Temperature	3 Kelvin (Warm White)
Speaker Output	2 x 5 Watts (Stereo)
Battery Type	Lithium-ion
Battery Capacity	2200 mAh
Operating Time	Up to 6 hours
Charging Time (USB-C)	Approx. 4 hours
Solar Panel	1.5 W Polycrystalline
Protection Rating	IP44 (Splash-proof)
Control Method	Remote Control

Warranty and Support

SCHWAIGER products are designed and manufactured to the highest quality standards. For information regarding warranty terms and conditions, please refer to the warranty card included with your product or visit the official SCHWAIGER website.

For technical support, troubleshooting assistance, or spare parts, please contact SCHWAIGER customer service. Contact details can typically be found on the product packaging or the brand's official website.

Website: www.schwaiger.de (Please note: This is a general placeholder, actual support links may vary.)

© 2024 SCHWAIGER. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question