Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

HOROW HR-T36

HOROW HR-T36 Smart Toilet User Manual

Model: HR-T36

1. Introduction and Overview

This manual provides essential information for the safe and efficient operation, installation, and maintenance of your HOROW HR-T36 Smart Toilet. Please read this manual thoroughly before installation and use, and retain it for future reference.

The HOROW HR-T36 is a sophisticated smart toilet designed to enhance your bathroom experience with advanced features such as automatic lid opening/closing, powerful dual flush, integrated bidet functions, heated seat, and a warm air dryer.



The HOROW HR-T36 Smart Toilet offers a range of luxurious features including auto open/close seat and lid, auto flushing, dual flush system, auto bowl pre-rinse, built-in pump-assisted flush, front and rear wash, multi-function foot sensor, warm air dryer, heated seat, UV light, deodorizer, arced stainless steel nozzle, LED nightlight, remote control, and energy-saving design.

2. Safety Information

Always adhere to the following safety guidelines to prevent injury or damage to the product:

- Ensure the toilet is connected to a grounded 120 Volts AC power source.

- Do not immerse the product in water or spray water directly onto electrical components.
- Unplug the toilet from the power outlet before performing any maintenance or cleaning.
- Keep children and pets away from the toilet during operation, especially when the lid is opening/closing automatically.
- Do not attempt to repair or modify the toilet yourself. Contact qualified service personnel for assistance.
- The maximum wattage for this unit is 1240 watts. Ensure your electrical circuit can support this load.

3. Package Contents

Verify that all components are present in the package before beginning installation:

- Smart Toilet Unit
- Use Manual
- Flange
- Installing Template
- Hose
- Wax Ring
- Valve
- Installation Accessories
- Remote Control
- Battery for Remote Control



Included components: Flange, Remote Control, Battery, Wax Ring, Valve, Installation Accessories, Manual, and Installation Template.

4. Setup and Installation

The HOROW HR-T36 is designed for floor-mounted installation with a 12-inch rough-in. Professional installation is recommended due to the electrical and plumbing connections required.

4.1 Pre-Installation Check

- Verify your bathroom's rough-in measurement is 12 inches.
- Ensure a dedicated 120V AC grounded electrical outlet is available near the installation area. The power cord length

is 43 inches.

- Perform a water flow test: Place a 2-gallon bucket under your existing toilet's water supply line. Open the valve and measure the water collected in 15 seconds. You need at least 1 gallon to ensure proper flushing performance for the HR-T36.

4.2 Plumbing Connection

The toilet features a built-in water pump for powerful flushing, even with lower water pressure. Connect the provided hose and valve to your existing water supply line according to the installation template.



The pump-assisted powerful flush system ensures efficient full (1.45 GPF) or half (1.08 GPF) flushes, ideal for low water pressure environments.

4.3 Toilet Placement

Carefully position the toilet over the flange, aligning the bolts. The toilet's design allows it to sit close to the wall, so ensure adequate clearance for water supply connections.



The sleek black design of the HR-T36 Smart Toilet integrates seamlessly into modern bathroom aesthetics.

5. Operating Instructions

Your HOROW HR-T36 Smart Toilet offers a range of automated and customizable functions for optimal comfort and hygiene.

5.1 Automatic Lid Operation

The toilet features sensors that detect your approach and departure, automatically opening and closing the lid for a hands-free experience.



The smart toilet automatically opens and closes its lid upon detecting presence, providing a hygienic, hands-free experience.

5.2 Flushing Options

The HR-T36 offers multiple ways to flush:

- **Auto Dual Flush:** Automatically detects full or half flush based on seat time.
- **Off-seat Flush:** Flushes automatically when you stand up.
- **Foot Sensor:** Activate flush with a foot gesture.
- **Remote Control:** Use the provided remote for manual flush.
- **Knob:** Manual flush option via the side knob. In case of power outage, a short press of the knob will initiate a flush.



The toilet offers versatile flushing options: off-seat, foot sensor, remote, knob, and automatic dual flush based on seat time.

5.3 Bidet Functions and Temperature Control

Customize your cleaning experience with various washing methods and adjustable temperatures:


- **Washing Modes:** Front wash, rear wash, and pulse massage cleaning modes.
- **Water Temperature:** Adjust water temperature to your preference.
- **Heated Seat:** The seat temperature can be adjusted to 6 levels (from room temperature to 100°F).
- **Warm Air Dryer:** Gentle warm air completes your cleaning routine. Air temperature is also adjustable to 6 levels (from room temperature to 122°F).



The nozzle provides front wash, rear wash, and pulse massage, with instant water temperature adjustment across 6 levels.



The heated seat offers 6 adjustable temperature levels for personalized comfort.

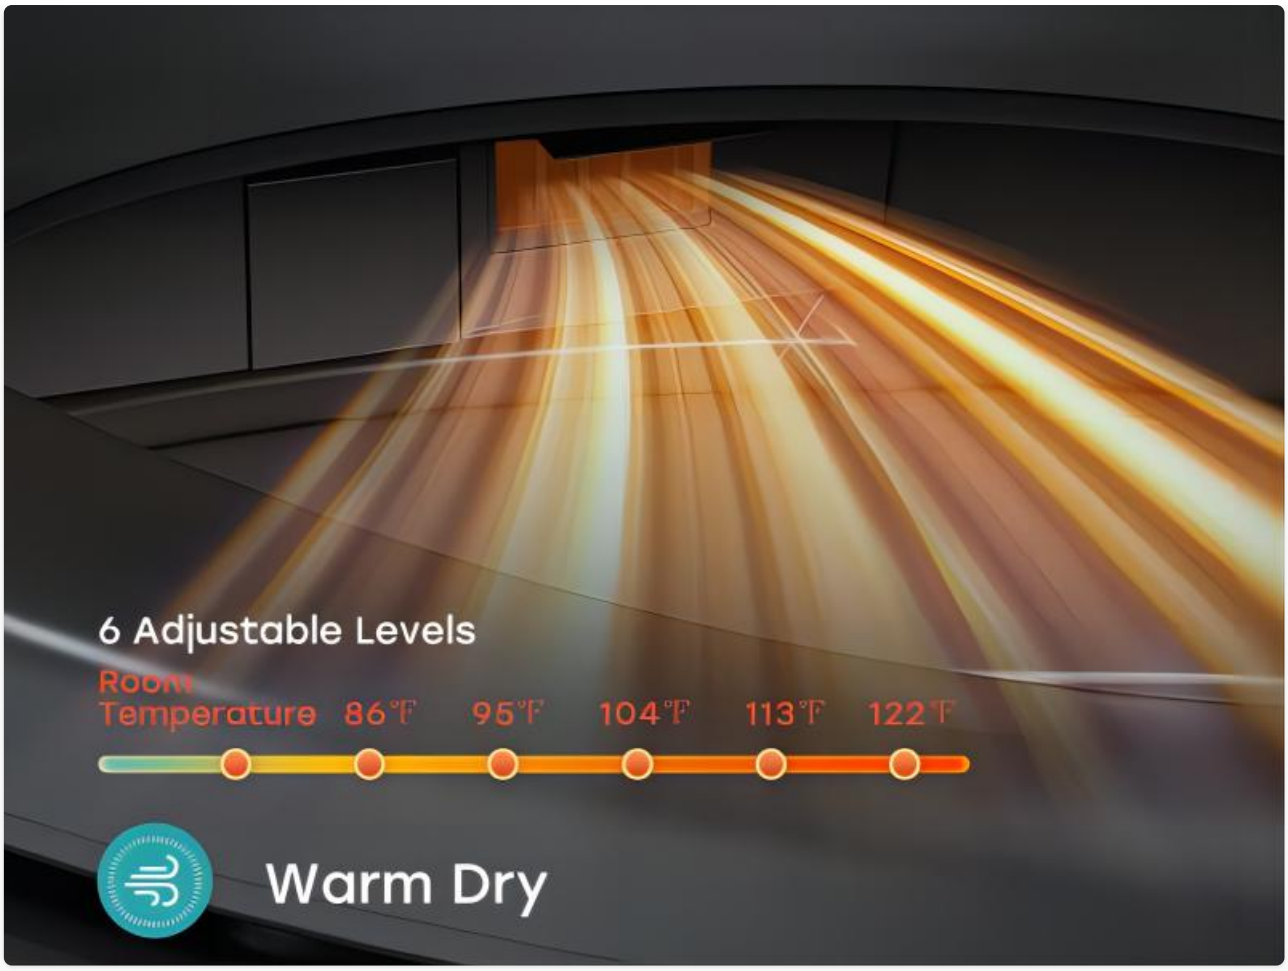

The warm air dryer provides 6 adjustable temperature levels for efficient drying.

5.4 Night Light and Digital Display

The intelligent bowl nightlight provides illumination for nighttime use. The exquisite digital display shows current settings for warm air temperature, seat temperature, and water temperature.



The intelligent bowl nightlight provides subtle illumination for convenience during nighttime.



The digital display provides clear indicators for warm air temperature, seat temperature, and water temperature.

6. Maintenance

Regular maintenance ensures the longevity and optimal performance of your smart toilet.

6.1 Self-Cleaning Nozzle

The bidet nozzle features a self-cleaning function to maintain hygiene. This function activates automatically before and after each use.



The self-cleaning nozzle ensures hygienic operation by cleaning itself before and after each use.

6.2 Auto Deodorization


The toilet is equipped with an auto deodorization system to minimize unpleasant odors, contributing to a fresher bathroom environment.



The auto deodorization feature helps maintain a fresh and clean environment by reducing unpleasant smells.

6.3 Pre-Wet Function

Upon sitting, a stream of water will pre-wet the inner wall of the bowl. This helps prevent waste from sticking, making the bowl easier to clean.

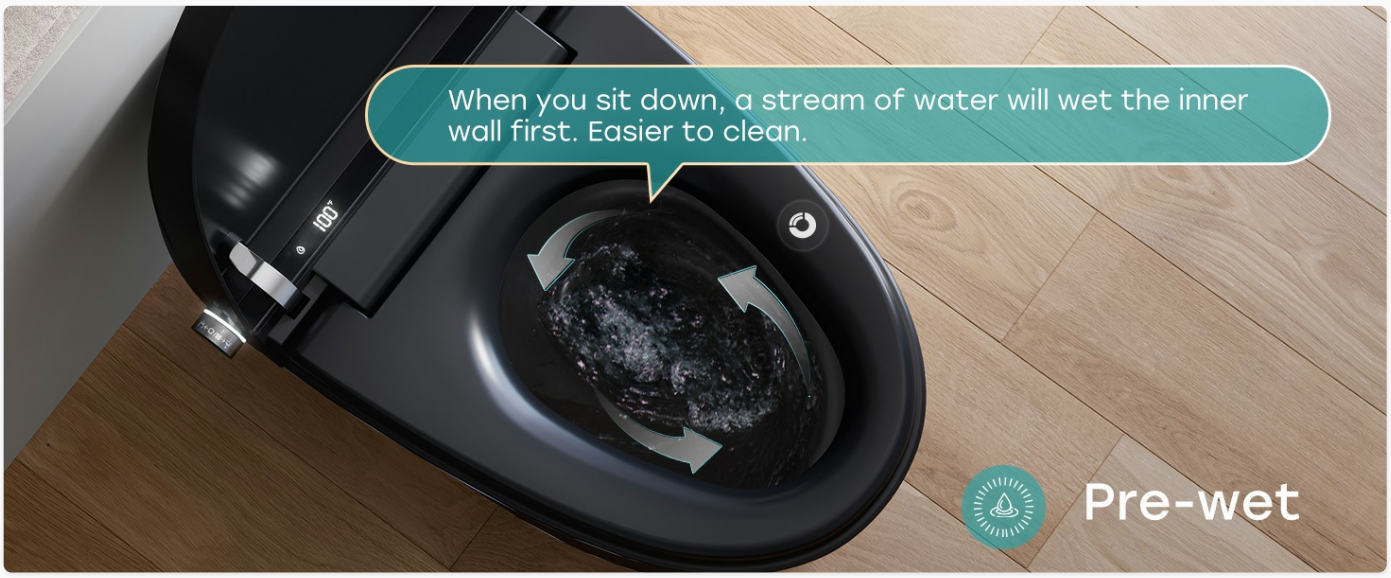

The pre-wet function ensures the inner bowl is moistened before use, facilitating easier cleaning.

6.4 General Cleaning

Clean the exterior surfaces with a soft, damp cloth and mild, non-abrasive cleaner. Avoid harsh chemicals or abrasive materials that could damage the finish.

7. Troubleshooting

If you encounter issues with your HOROW HR-T36 Smart Toilet, refer to the following common solutions. For problems not listed here, please contact customer support.

Problem	Possible Cause	Solution
No power/Unit not responding	Power cord unplugged, circuit breaker tripped, GFCI outlet tripped.	Check power connection, reset circuit breaker/GFCI.
Lid not opening/closing automatically	Sensor obstructed or dirty, object blocking lid path.	Clean sensor, remove obstructions.
Weak flush	Insufficient water pressure, water supply valve partially closed.	Ensure water supply valve is fully open. Verify adequate water flow (refer to Section 4.1).
Bidet spray not working or weak	Nozzle clogged, water filter dirty, water supply issue.	Clean nozzle, check water filter, ensure water supply is open.
Heated seat not warming	Temperature setting too low, power issue.	Adjust seat temperature setting, check power.

8. Specifications

Feature	Specification
Model Number	HR-T36
Dimensions (L x W x H)	26.77 x 16.81 x 19.21 inches
Item Weight	95 pounds
Material	Ceramic
Color	Black
Installation Type	Floor Mounted
Rough-In	12 Inches
Voltage	120 Volts
Wattage	1240 watts
Power Source	AC
Plug Format	B - US style with ground plug
Flush Type	Dual
Seat Material Type	Plastic
Special Features	Waterproof, Temperature adjustment, Water pressure adjustment, Heated seat, Quiet close Seat

9. Warranty and Support

HOROW is committed to providing high-quality products and excellent customer service.

- **30-Day Money Back Guarantee:** If you are not satisfied with your purchase, you may return it within 30 days for a full refund.
- **12-Month Replacement Warranty:** The product is covered by a 12-month replacement warranty from the date of purchase for manufacturing defects.
- **Considerate Service:** For any problems or inquiries, please contact our customer service team. We aim to reply within 24 hours.

For further assistance, please visit the official HOROW store or contact customer support through your purchase platform.

© 2024 HOROW. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0D9BB41X3

More documents and user manuals: **https://manuals.plus/**