**Saved from manuals.plus.**
**Open the live page for links to other documents and user manuals.**



## Dpofirs DBEp206vurxmbgoz3123

# Dpofirs Wireless Air Remote Mouse

Model: DBEp206vurxmbgoz3123

Brand: Dpofirs

## Introduction

The Dpofirs Wireless Air Remote Mouse is an intelligent 2.4G air mouse with integrated voice control, infrared control, and learning functions. Designed for versatility, it is compatible with a wide range of devices including TV Boxes, Mini PCs, Windows computers, HTPCs, and PCTV systems. Its robust and durable construction ensures stable performance and a long service life.
This manual provides detailed instructions on how to set up, operate, and maintain your new air remote mouse, along with troubleshooting tips and product specifications.

## Package Contents

- 1 x Wireless Air Remote Mouse
- 1 x USB Receiver
- 1 x User Manual

## Setup

### 1. Battery Installation

The remote control requires two AAA batteries (not included).

1. Locate the battery compartment on the back of the remote control.
2. Slide open the battery cover.
3. Insert two AAA batteries, ensuring the correct polarity (+/-) as indicated inside the compartment.
4. Close the battery cover securely.




The image shows the back of the remote with the battery cover removed, revealing the two AAA battery slots. The compact nano USB receiver is also displayed, emphasizing its plug-and-play convenience.

## 2. Connecting the USB Receiver

The remote connects wirelessly via a 2.4G USB receiver.

1. Plug the USB receiver into an available USB port on your TV Box, Mini PC, Windows computer, HTPC, or PCTV system.
2. The system should automatically recognize the device. No additional drivers are typically required.
3. Once connected, the remote is ready for use.




This image displays the Dpofirs Wireless Air Remote Mouse alongside its compact USB receiver, highlighting the sleek black design of the remote.

## Operating Instructions

### 1. 2.4G Air Mouse Function

The remote features a 6-axis gyroscope for precise air mouse control. Simply point the remote at the screen and move your wrist to control the cursor.

- To activate/deactivate the air mouse function, press the**Mouse On**/**Off** button.
- The cursor will appear on your screen, allowing for intuitive navigation.




A user is shown comfortably holding the Dpofirs 2.4G Air Fly Mouse, demonstrating its ergonomic design and ease of use for controlling a smart TV or media box.




An illustration highlighting key features such as the white backlit buttons for visibility in low light, the built-in 6-axis gyroscope for precise air mouse control, 2.4GHz wireless connectivity for up to 10 meters range, and integrated voice search capability.

## 2. Voice Control

The built-in HD microphone allows for voice input and search functions.

- Press the **Voice Switch** button (microphone icon) to activate voice input.
- Speak clearly into the microphone.
- **Note:** The voice search function may not be supported by all applications. It is primarily applicable to built-in search boxes or voice input applications.

## 3. Infrared (IR) Learning Function

The remote supports IR learning for the Power Key, allowing you to consolidate control of multiple devices.

1. Place the Dpofirs remote and the original remote control head-to-head, approximately 1-3 cm apart.
2. Press and hold the **Power** button on the Dpofirs remote for 3 seconds. The red indicator light will start to flash slowly, indicating it has entered learning state.


3. Press the **Power** button on your original remote control. The Dpofirs remote's red indicator light will flash rapidly and then go out, signifying successful IR learning.
4. The Power Key on your Dpofirs remote is now programmed.




This image provides a visual guide on how to program the remote's Power Key using infrared learning, allowing it to control other IR-enabled devices. It shows pressing and holding the Power button to enter learning mode and then aligning with another remote to transfer the signal.

## 4. Button Functions Overview

Refer to the diagram below for a detailed layout and function of each button.

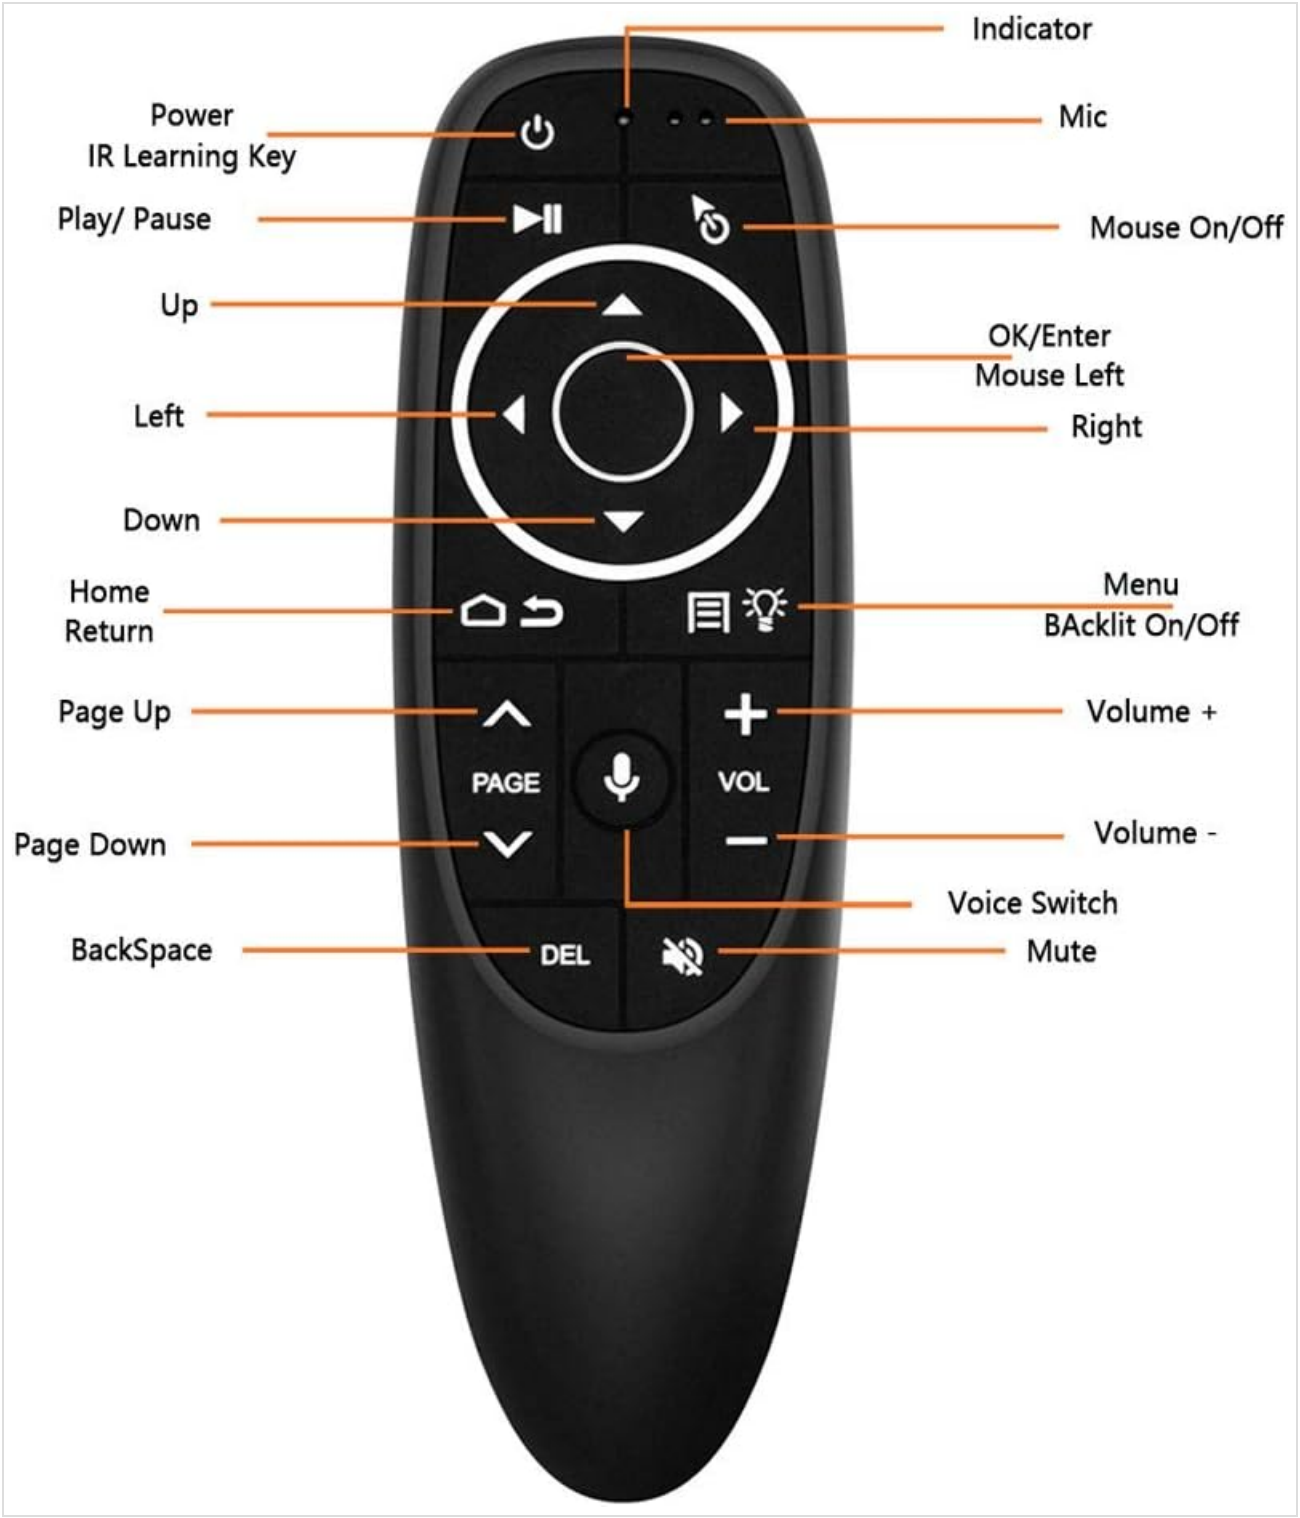


A comprehensive diagram labeling each button on the remote control, including Power, Play/Pause, Navigation (Up, Down, Left, Right, OK/Enter), Home, Return, Menu, Backlit On/Off, Page Up/Down, Microphone, Volume Up/Down, Delete, and Mute.

- **Power / IR Learning Key:** Turns the device on/off, also used for IR learning.
- **Play/Pause:** Controls media playback.
- **Mouse On/Off:** Toggles the air mouse cursor.
- **Navigation Pad (Up, Down, Left, Right, OK/Enter):** For menu navigation and selection.
- **Home:** Returns to the home screen.
- **Return:** Goes back to the previous screen.
- **Menu:** Opens context menus.
- **Backlit On/Off:** Controls the white backlight of the buttons.
- **Page Up/Down:** Scrolls through pages.

- **Voice Switch (Mic):** Activates the microphone for voice input.
- **Volume + / -:** Adjusts the volume.
- **DEL (Backspace):** Deletes characters or goes back.
- **Mute:** Mutes/unmutes audio.

## Maintenance

- Clean the remote control regularly with a soft, dry cloth. Avoid using liquid cleaners or abrasive materials.
- Do not expose the remote to extreme temperatures, direct sunlight, or high humidity.
- If the remote will not be used for an extended period, remove the batteries to prevent leakage.
- Handle the USB receiver with care to prevent damage.

## Troubleshooting

### Remote not responding:

- Ensure batteries are correctly installed and not depleted. Replace if necessary.
- Check if the USB receiver is securely plugged into the device. Try a different USB port.
- Ensure the remote is within the operating range (up to 10 meters) of the USB receiver.
- Restart the host device (TV Box, PC, etc.).

### Air mouse cursor is erratic or not moving smoothly:

- Ensure there are no obstructions between the remote and the USB receiver.
- Try recalibrating the gyroscope by placing the remote on a flat surface for a few seconds.

### Voice control not working:

- Verify that the application you are using supports voice input.
- Ensure the microphone is not covered.
- Check the audio input settings on your host device.

### IR learning failed:

- Ensure the original remote and the Dpofirs remote are aligned correctly and close enough (1-3 cm).
- Make sure the original remote's battery is not low.
- Repeat the IR learning steps carefully.

## Specifications

| Feature | Detail |
|---|---|
| Product Type | Wireless Air Remote Mouse |
| Brand | Dpofirs |
| Model Number | DBEp206vurxmbgoz3123 |
| Color | Black (default) |
| Material | ABS |

| Feature | Detail |
|---|---|
| Connectivity Technology | 2.4GHz Radio Frequency (Wireless) |
| Operating Distance | Approx. 10 meters (33 feet) |
| Battery Type | 2 x AAA batteries (NOT included) |
| Interface | USB (for receiver) |
| Special Features | Durable, Robust, Wireless, Voice Control, IR Learning, 6-Axis Gyroscope, White Backlit Buttons |
| Number of Buttons | 15 |
| Compatible Devices | Streaming devices, Televisions, TV Box, Mini PC, Windows, HTPC, PCTV |




This diagram details the multi-layer spraying process for the remote's buttons, ensuring durability and clear character visibility. It also lists compatible devices: Smart TV, PC, Android TV Box, Mouse, Tablet, and Gamepad.

This image compares different Printed Circuit Board (PCB) manufacturing processes, highlighting the Electroless Nickel Immersion Gold (ENIG) PCB used in this product for its durability, non-oxidizing properties, and long service life, compared to Carbon Oil PCB and Hot Air Solder Leveling (HASL) PCB.

## Warranty and Support

This product is covered by a return policy allowing for refund or replacement within 30 days of purchase. For any issues or support inquiries, please refer to the seller's contact information provided at the point of purchase or through the online marketplace where the product was acquired.
For additional information or to explore other products from Dpofirs, please visit the official Dpofirs brand storeDpofirs Brand Store.

© 2023 Dpofirs. All rights reserved.

## Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

**Name**

Anonymous

**Email**

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

**Question**

Example: How do I reset this device or fix this error?

**Details**

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

**Open the live page**

**https://manuals.plus/asin/B08DY83SSD**

More documents and user manuals: **https://manuals.plus/**