Manuals+
Q & A | Deep Search | Upload

GEREE C108WX-UK

GEREE CCTV Camera Wireless Outdoor Wifi IP Home Security Camera

Model: C108WX-UK

Brand: GEREE

Introduction

This manual provides detailed instructions for the installation, operation, and maintenance of your GEREE C108WX-UK Wireless Outdoor Wifi IP Home Security Camera. Please read this manual thoroughly before using the product to ensure proper functionality and safety.
The GEREE C108WX-UK camera features 1080P Full HD video, 360° pan/tilt functionality, night vision, two-way audio, smart motion tracking, and is designed for outdoor use with IP66 waterproofing.

Package Contents

Verify that all items are present in the package:

- 1 x WiFi IP Camera
- 1 x User Manual (this document)
- 1 x Power Cable
- 1 x Screw Pack for mounting

Safety Information

- Ensure the power supply is 12V 2.5A (included). Using an incorrect power supply may damage the device.
- The camera is IP66 waterproof and dustproof, designed to operate in temperatures from -10°C to 45°C (14°F to 113°F).
- Do not attempt to disassemble or modify the camera. This will void the warranty and may cause damage.
- Keep the camera away from strong magnetic fields or corrosive environments.

Setup Guide

1. App Installation and Account Creation

The camera operates with the "ICSee" application, compatible with iOS and Android devices.

1. Download the "ICSee" app from your device's app store.
2. Open the app and create a new user account.

2. Camera Power-On and Initial Connection

3. Connect the camera to the provided 12V 2.5A power supply and plug it into an electrical outlet.
4. Wait for the camera to power on and initiate its self-test.
5. In the "ICSee" app, select the '+' icon to add a new camera.

3. Wi-Fi Network Configuration

The camera supports 2.4GHz Wi-Fi networks only. 5GHz Wi-Fi is not supported.

6. Select your 2.4GHz Wi-Fi network from the list in the app and enter your Wi-Fi password. Then, select "Connect to Wi-Fi".
7. The app will display a QR code. Position your camera to scan this QR code.
8. Once the QR code is scanned successfully, select "Next" in the app.
9. Select "Save" and then "Start using" to complete the pairing process.
10. If the connection fails, please push the Reset button on the camera and try again.

Image: The GEREE CCTV Camera, illustrating its physical design and dual antenna setup for wireless connectivity.

Operating Instructions

1. Live View and Pan/Tilt Control

Access the live video feed through the "ICSee" app. The camera offers 355° horizontal and 110° vertical rotation.

- Use the directional controls within the app to remotely adjust the camera's viewing angle.
- The 1080P Full HD resolution provides clear video streaming.

Image: The camera providing a wide-angle view of a house, with an overlay showing app controls for pan and tilt.

2. Night Vision

The camera is equipped with 8 Array LEDs (4 IR LEDs + 4 full-color LEDs) for enhanced night vision up to 40 meters (132ft).

- The camera automatically switches between day and night modes based on ambient light.
- Minimal illumination required: Color: 0.4 Lux (Day), Black/White: 0.01 Lux (Night).

3. Two-Way Audio

The built-in microphone and speaker enable two-way communication.

- Use the app to speak through the camera or listen to audio from the camera's location.

Image: Demonstrates the two-way audio function, allowing communication with visitors via the camera.

4. Smart Motion Detection and Tracking

The camera can detect motion and send alerts to your phone. It also features smart motion tracking.

- Configure motion detection zones and sensitivity settings within the "ICSee" app.
- Upon detecting movement, the camera sends an alert notification and a 6-second video clip to your phone.
- When someone moves in front of the lens, the camera will automatically follow their direction. It returns to its original position after the person leaves the frame.

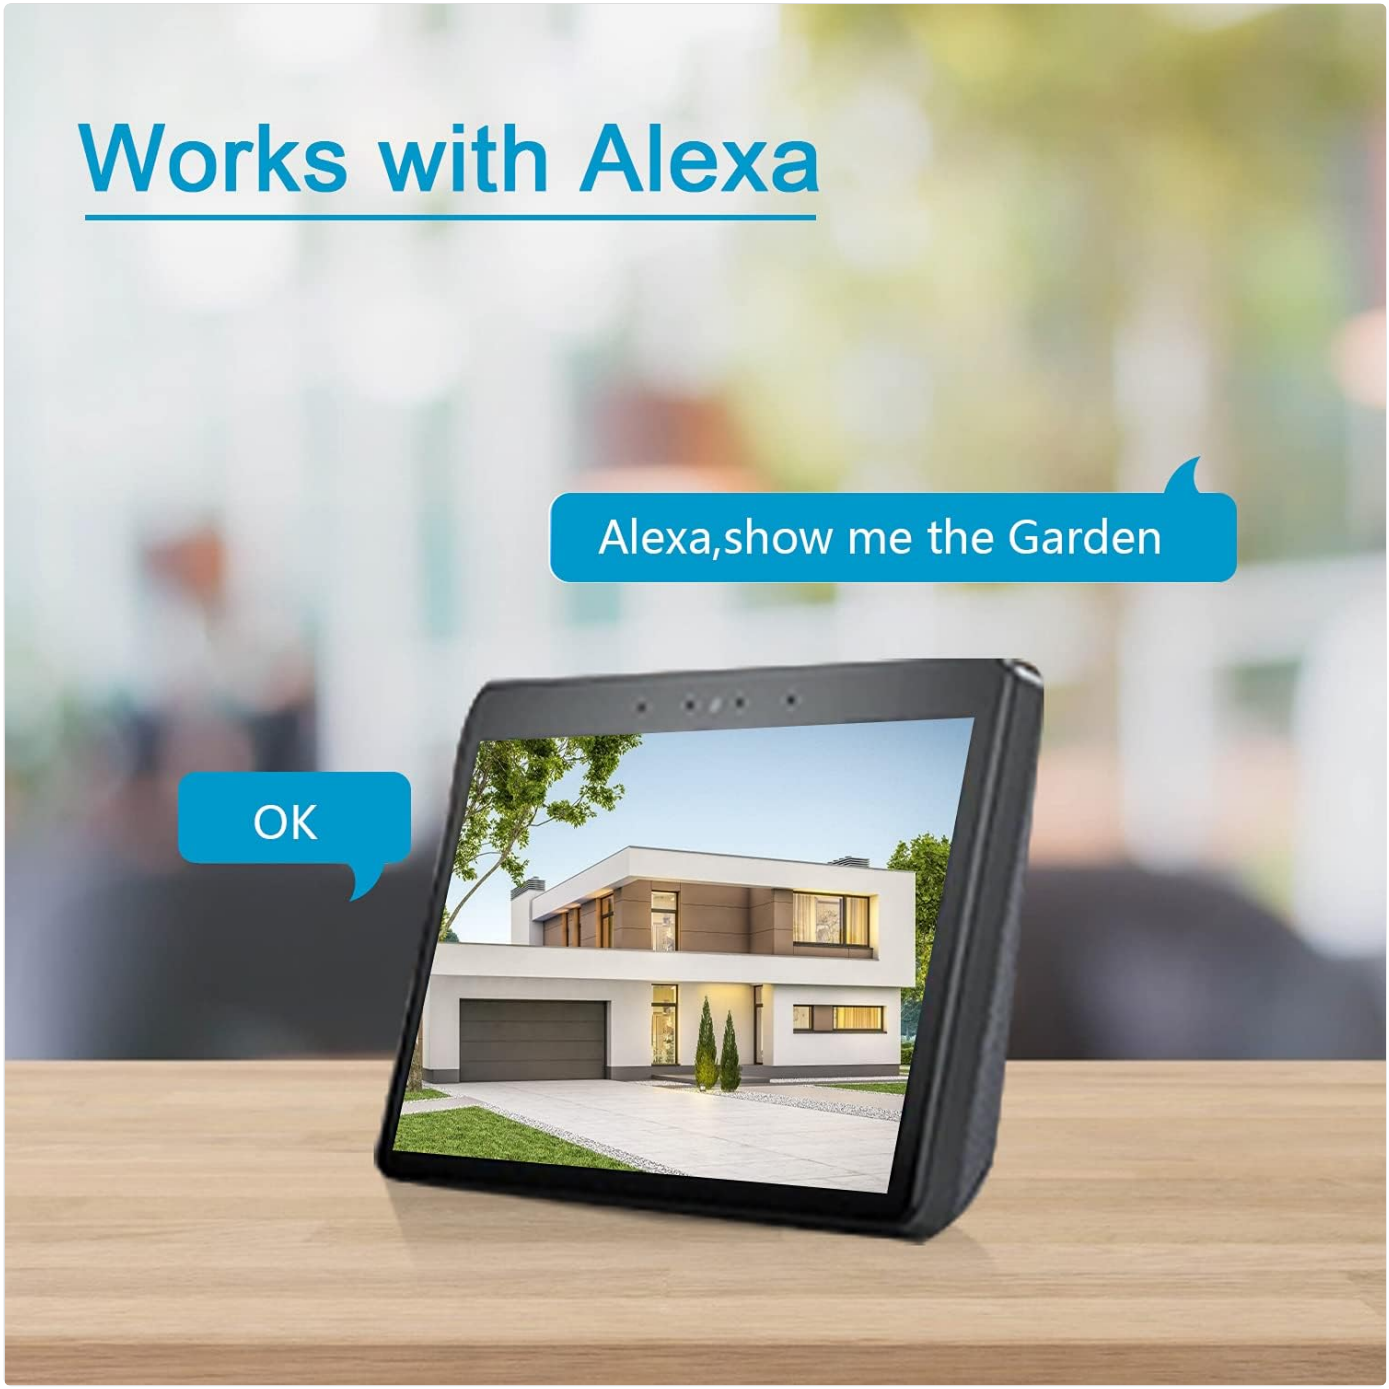

Image: A smartphone displaying a "Smart Motion Detection Alarm" notification from the camera, showing a detected intruder.

Image: Illustrates the mobile tracking feature, where the camera automatically follows moving subjects.

5. Storage Options

The camera supports both local and cloud storage for video recordings.

- **SD Card Storage:** Insert a Micro SD card (up to 128GB) into the designated slot on the camera for local recording.
- **Cloud Storage:** Cloud storage is available as an optional service through the "ICSee" app. Cloud servers are located in the United States for privacy protection.

6. Multi-User Access

Share camera access with family and friends.

- The "ICSee" app allows up to 6 users to view the camera feed simultaneously.
- You can share access to your camera system with relatives, friends, or neighbors through the app.

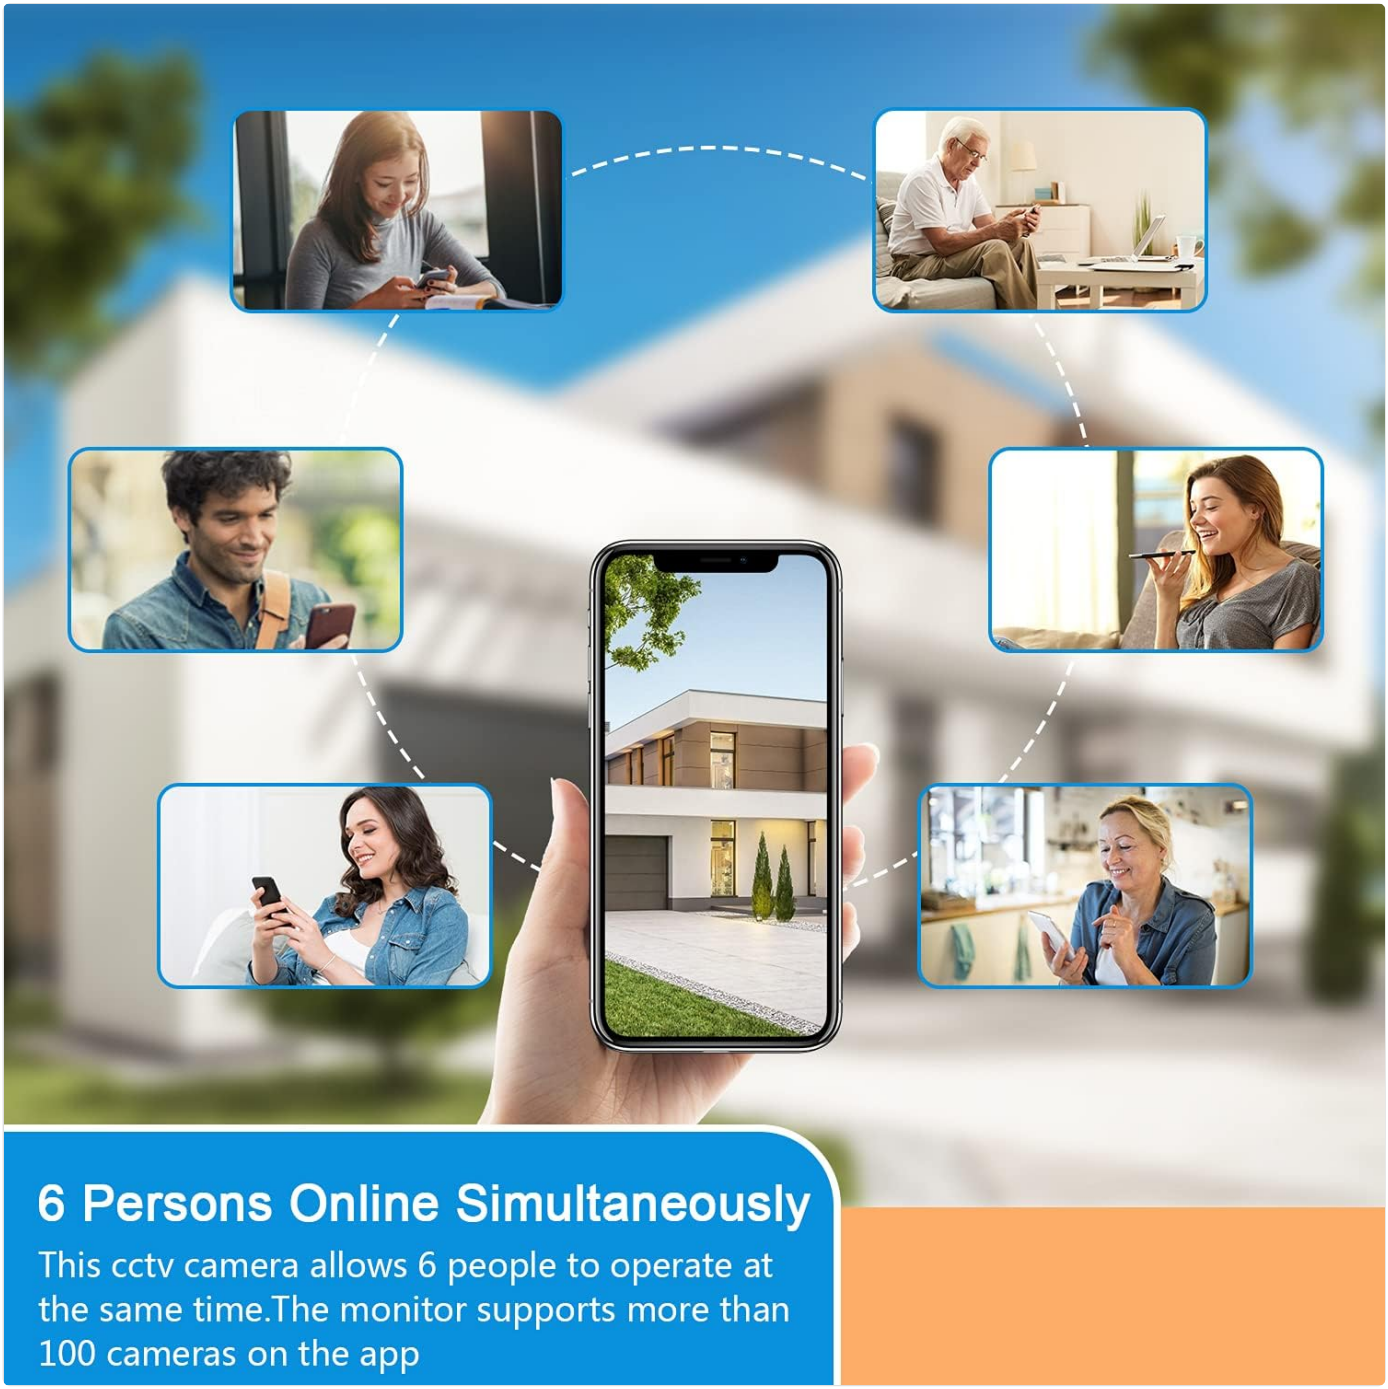

Image: Depicts multiple users simultaneously accessing the camera feed via their smartphones.

7. Works with Alexa

Integrate your GEREE camera with Amazon Alexa for voice control.

- Follow the instructions in the "ICSee" app or Alexa app to link your camera.
- Once linked, you can use voice commands like "Alexa, show me the Garden" to view the camera feed on compatible Alexa devices.

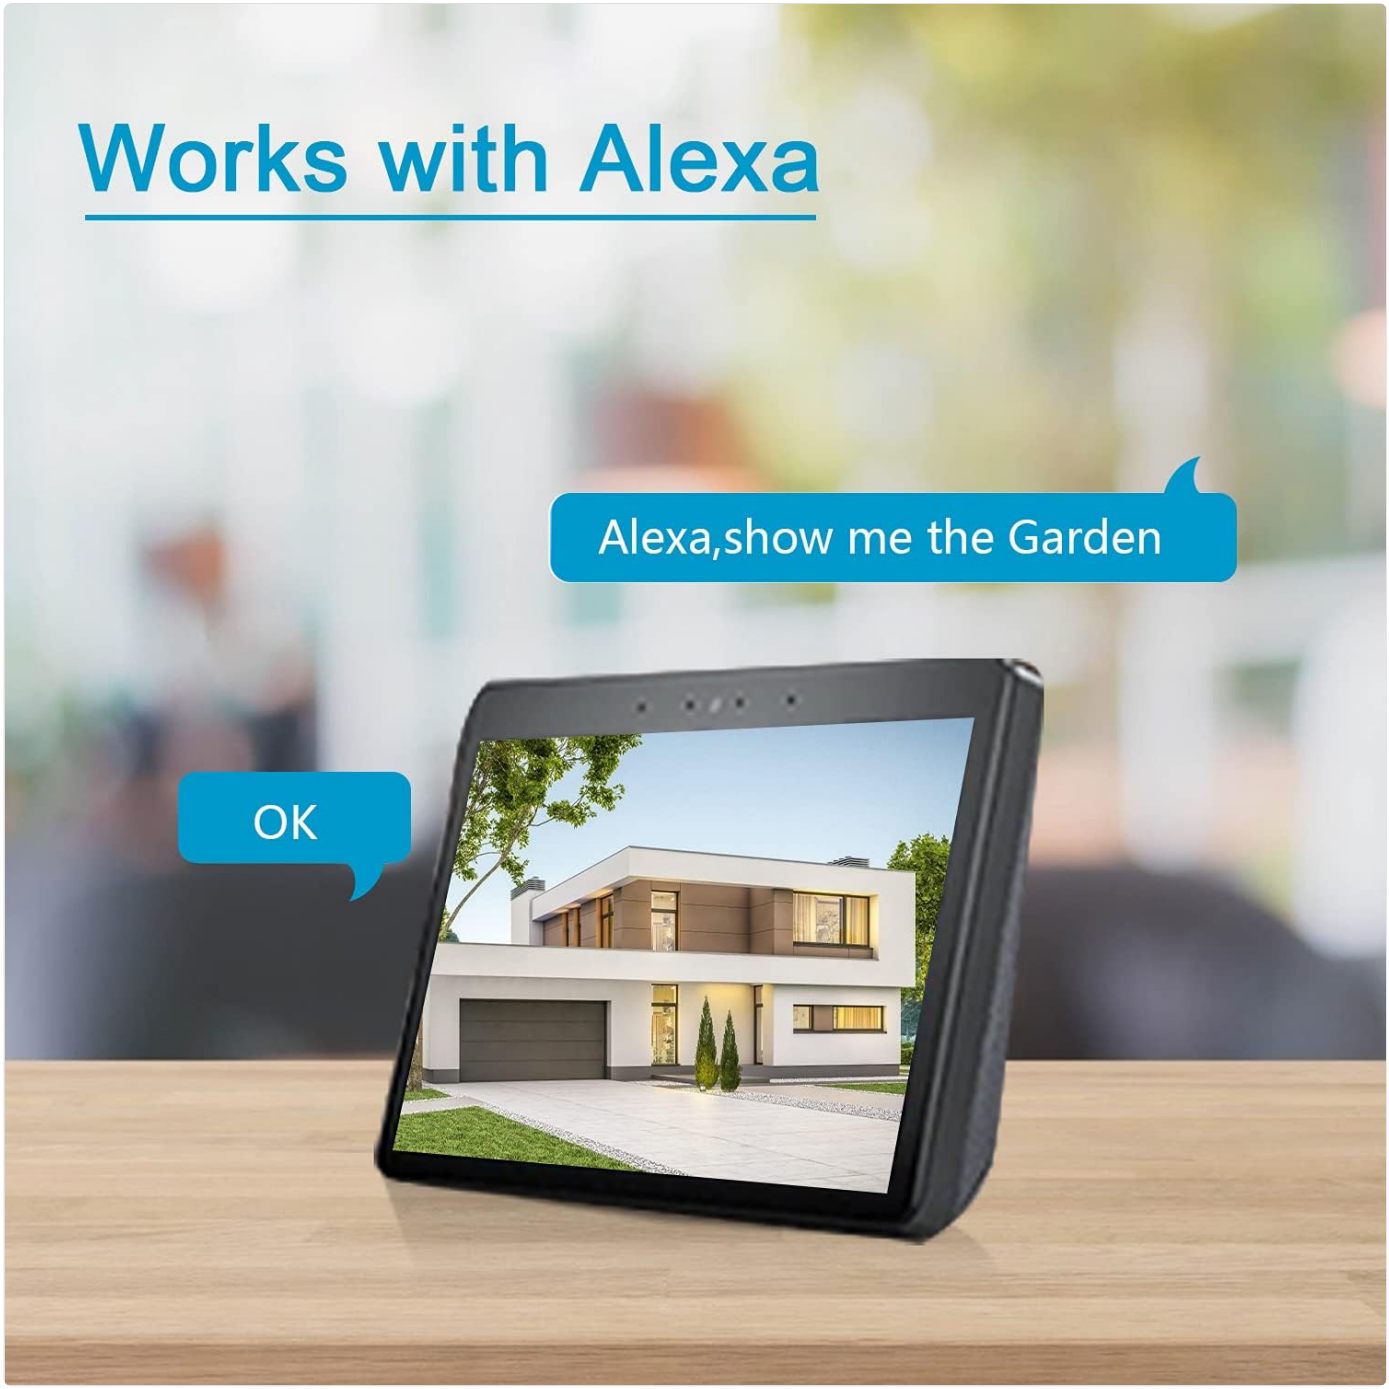

Image: An Echo Show device displaying the camera's live feed, demonstrating compatibility with Alexa.

Maintenance

1. Cleaning

- Periodically clean the camera lens and housing with a soft, damp cloth.
- Do not use harsh chemicals or abrasive cleaners, as these can damage the camera's finish or lens.

2. Firmware Updates

- Check the "ICSee" app regularly for available firmware updates.
- Keeping the firmware updated ensures optimal performance and security.

Image: The camera shown with water droplets, highlighting its IP66 waterproof and dustproof capabilities for all-weather use.

Troubleshooting

1. Connection Issues

- **Camera not connecting to Wi-Fi:**
  - Ensure your Wi-Fi network is 2.4GHz. 5GHz networks are not supported.
  - Verify the Wi-Fi password is correct.
  - Move the camera closer to your Wi-Fi router to improve signal strength.
  - Reset the camera using the reset button and try the setup process again.
- **App not finding the camera:**
  - Ensure the camera is powered on and in pairing mode (indicated by a specific LED status, refer to app for details).

- Check if your phone is connected to the same 2.4GHz Wi-Fi network.

2. Video Quality Issues

- **Blurry or unclear video:**
  - Clean the camera lens carefully.
  - Ensure adequate lighting, especially during night vision operation.
  - Check your internet connection speed. A slow connection can affect streaming quality.

3. Motion Detection Not Working

- **No alerts received:**
  - Verify motion detection is enabled in the "ICSee" app settings.
  - Adjust motion detection sensitivity.
  - Ensure app notifications are enabled on your smartphone.

Specifications

Feature	Detail
Model Number	C108WX-UK
Resolution	1920*1080P (Full HD)
Processor & Sensor	XM530+SC2235
Power Supply	12V 2.5A (Included)
IR Cut Minimal Illumination	Color: 0.4 Lux (Day), B/W: 0.01 Lux (Night)
IR LED Configuration	8pcs Array LED (4pcs IR led + 4pcs full-color led)
IR Distance	40 meters / 132 ft
Wireless Protocols	Support 2.4GHz (802.11b/g/n), No support for 5GHz Wi-Fi
Network Interface	10/100M Base-TX Ethernet, RJ45 Connector
Video Compression	H.264
Pan/Tilt Range	355° Horizontal, 110° Vertical
Storage	Max 128GB SD Card, Cloud Storage (optional)
Operating Temperature	-10°C to 45°C (14°F to 113°F)
Waterproof Rating	IP66
Operating System Compatibility	Android, iOS
Item Weight	640 g
Package Dimensions	23.1 x 21.4 x 13.5 cm

Warranty and Support

GEREE products come with a 12-month warranty from the date of purchase.
For technical support or warranty claims, please contact GEREE customer service through the contact information provided with your purchase or on the official GEREE website.

© 2026 GEREE. All rights reserved.