

Eskiin Eskiin-01

Eskiin Filtered Showerhead User Manual

Model: Eskiin-01

1. INTRODUCTION

Thank you for choosing the Eskiin Filtered Showerhead. This manual provides essential information for the safe and efficient installation, operation, and maintenance of your new showerhead. Please read this manual thoroughly before installation and retain it for future reference.

2. PACKAGE CONTENTS

Verify that all items are present in your package:

- 1 x Eskiin Filtered Showerhead
- 1 x Eskiin Filter (pre-installed inside the showerhead)
- 1 x Wrench
- 1 x Plumber's Tape
- 1 x Installation Guide

3. INSTALLATION INSTRUCTIONS

Follow these steps for a quick and easy installation. No special tools are required beyond what is provided.

1. **Prepare for Installation:** Ensure the main water supply to your shower is turned off. Remove your existing showerhead by twisting it counter-clockwise. Use the provided wrench if necessary. Clean any residue from the shower arm threads.



Figure 3.1: Removing the old showerhead.

2. **Apply Plumber's Tape:** Wrap the threads of your shower arm with the provided plumber's tape (PTFE tape) 3-4 times clockwise. This helps prevent leaks.
3. **Install the Eskiin Showerhead:** Carefully twist the Eskiin Filtered Showerhead onto the shower arm threads in a clockwise direction. Hand-tighten until snug. Avoid over-tightening.

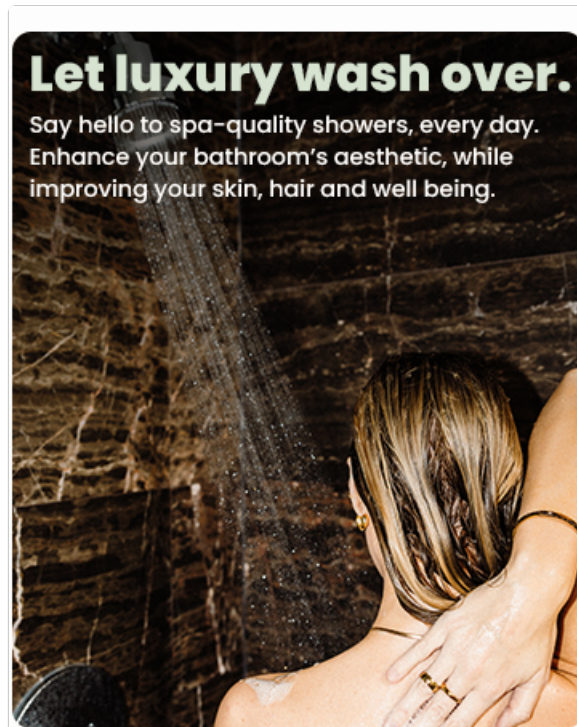


Figure 3.2: Twisting on the new Eskiin showerhead.

4. **Check for Leaks:** Turn on the main water supply and check for any leaks around the connection point. If leaks occur, tighten slightly more or reapply plumber's tape.

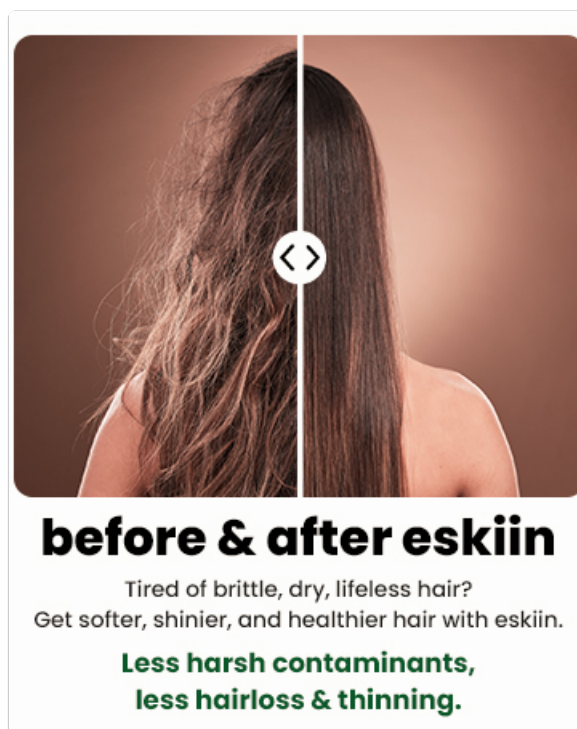


Figure 3.3: Enjoying your new showerhead.

4. OPERATING INSTRUCTIONS

The Eskiin Filtered Showerhead operates like a standard showerhead, with the added benefit of advanced water filtration.

- **Water Flow:** Turn on your shower faucet as usual. The showerhead is designed to provide high-pressure water flow.
- **Filtration:** Water passes through the multi-stage filter inside the showerhead, reducing chlorine, heavy metals, and other impurities.

- **Initial Use:** During the first use or after a filter change, allow water to run for a few minutes to flush out any loose filter media. You may notice some discoloration initially; this is normal and will clear.

5. MAINTENANCE

5.1 Filter Replacement

The internal filter should be replaced approximately every 2-3 months, or sooner depending on water quality and usage, to maintain optimal filtration performance.

1. Turn off the main water supply to your shower.
2. Unscrew the showerhead from the shower arm by twisting counter-clockwise.
3. Carefully open the showerhead housing to access the filter cartridge.
4. Remove the old filter and dispose of it.
5. Insert a new Eskiin replacement filter, ensuring it is seated correctly.
6. Reassemble the showerhead and reattach it to the shower arm, following the installation steps (Section 3).
7. Flush the new filter by running water for a few minutes before use.

5.2 Cleaning the Showerhead

To prevent mineral buildup and maintain spray performance, periodically clean the showerhead nozzles.

- Gently rub the rubber nozzles with your finger or a soft brush to dislodge mineral deposits.
- For stubborn buildup, soak the showerhead in a solution of white vinegar and water for a few hours, then scrub and rinse thoroughly. Avoid harsh chemical cleaners.

6. TROUBLESHOOTING

Problem	Possible Cause	Solution
Low Water Pressure	• Clogged filter • Mineral buildup in nozzles • Low household water pressure	• Replace filter (Section 5.1) • Clean nozzles (Section 5.2) • Consult a plumber for household water pressure issues
Leaking at Connection	• Insufficient plumber's tape • Loose connection • Damaged washer	• Reapply plumber's tape (Section 3, Step 2) • Tighten connection (Section 3, Step 3) • Check and replace washer if damaged
Water Discoloration	• New filter flushing • Old filter saturation	• Run water for several minutes until clear • Replace filter (Section 5.1)

7. SPECIFICATIONS

Brand	Eskiin
Model Number	Eskiin-01
Material	Chromium

Finish Type	Polished
Color	Chrome
Installation Type	Wall Mounted
Product Dimensions	5.5"L x 4.5"W
Efficiency	2.5 GPM
Special Feature	High pressure, advanced filtration (reduces chlorine and heavy metals)
Item Weight	2.55 pounds
UPC	198715432473

8. SAFETY INFORMATION

- Always turn off the main water supply before installing or performing maintenance on the showerhead.
- Do not use abrasive cleaners or tools on the showerhead finish, as this may cause damage.
- Ensure all connections are secure to prevent leaks and water damage.
- Keep replacement filters out of reach of children.
- If you experience persistent issues, consult a qualified plumber.

9. WARRANTY AND SUPPORT

Eskiin is committed to providing high-quality products. The "Eskiin promise" ensures that every step of the manufacturing process is scrutinized and tested with third-party inspectors and labs.

For support, questions, or warranty claims, please refer to the contact information provided with your purchase documentation or visit the official Eskiin website.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question