



Manuals.plus /

› Findepot /

› Findepot 44-48" W x 71" H Pivot Glass Shower Door Instruction Manual

Findepot FD-US-8D-3-4871-S

Findepot Pivot Glass Shower Door

Model: FD-US-8D-3-4871-S (44-48" W x 71" H)

Instruction Manual

[Safety Information](#)

[Product Overview](#)

[Package Contents](#)

[Specifications](#)

[Installation](#)

[Operation](#)

[Maintenance](#)

[Troubleshooting](#)

[Support](#)

1. SAFETY INFORMATION

Please read all instructions carefully before installation and use. Failure to follow these instructions may result in injury or product damage.

- This shower door uses 1/4 inch (6 mm) ANSI certified tempered glass. Tempered glass is designed to be durable, but can shatter into small, relatively harmless pieces if damaged at the edges or impacted forcefully.
- The glass panel is covered with an explosion-proof film to prevent shards from scattering in case of breakage.
- Always wear appropriate personal protective equipment (PPE) during installation, including safety glasses and gloves.
- It is recommended that two people install this shower door due to the weight and size of the glass panels.
- Ensure the installation surface (walls, floor) is structurally sound and level before beginning installation.
- Do not use abrasive cleaners or tools that could scratch the glass or metal finishes.



ANSI Certified

Fixed Glass **5mm**
Glass for Spindles **6mm**

Covered with explosion-proof film to prevent shards from scattering in case of breakage.

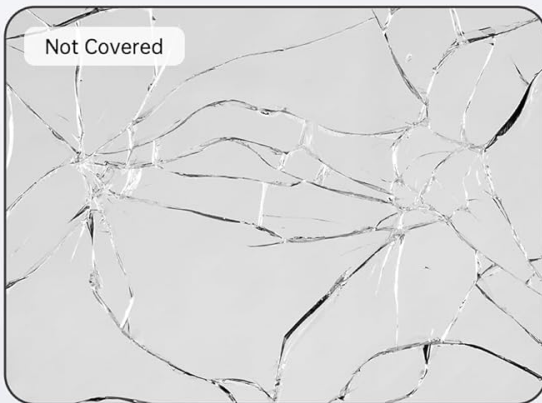


Image 1: Illustration of ANSI certified tempered glass with explosion-proof film for enhanced safety. The image shows two layers of glass, indicating fixed glass (5mm) and glass for spindles (6mm), with a visual comparison of broken glass (not covered vs. covered with film).

2. PRODUCT OVERVIEW

The Findepot Pivot Glass Shower Door is designed for modern bathrooms, offering both functionality and aesthetic appeal. Key features include:

- **Adjustable Width:** The door's width can be adjusted from 44 to 48 inches to fit various shower openings without cutting.
- **130° Pivot Opening:** Provides ample space for easy entry and exit.
- **Easy-Clean Coating:** The glass features a protective coating to resist water stains and soap buildup, simplifying maintenance.
- **Enhanced Safety:** Constructed with 1/4 inch (6 mm) ANSI certified tempered glass and an explosion-

proof film.

- **Dry and Wet Separation:** Effectively prevents water splashes and leaks, keeping the bathroom floor dry.
- **Durable Materials:** Features an aluminum alloy frame and 304 stainless steel handle for corrosion resistance and longevity.
- **Reversible Installation:** Can be installed for left or right-hand opening.



Image 2: A full view of the Findepot Pivot Glass Shower Door installed in a modern bathroom setting, showcasing its sleek design and clear glass panels.

3. PACKAGE CONTENTS

Before beginning installation, please verify that all components listed below are present and undamaged. If any parts are missing or damaged, please contact customer support immediately.



Image 3: Diagram illustrating the various components included in the shower door package. Labels include: A: Bottom Gasket, B: Door panel-1, C: Vertical Gasket, D: Wall Jamb, F: Door panel-2, G: Hinge, H: Handle, I: Magnetic strip, J: Magnetic Seal Aluminum, K: Magnetic Seal Wall Jamb, L: Water seal, M: Packaging Box.

- Bottom Gasket (A)
- Door Panel-1 (B)
- Vertical Gasket (C)
- Wall Jamb (D)
- Door Panel-2 (F)
- Hinge (G)
- Handle (H)
- Magnetic Strip (I)
- Magnetic Seal Aluminum (J)
- Magnetic Seal Wall Jamb (K)
- Water Seal (L)
- Mounting Hardware (screws, anchors, etc.)

4. SPECIFICATIONS

Feature	Detail
Brand	Findepot
Model Number	FD-US-8D-3-4871-S
Product Dimensions	44-48" W x 71" H (Adjustable)
Material	Aluminum, Tempered Glass (1/4" / 6mm)
Color	Brushed Nickel
Item Weight	88 Pounds
Installation Method	Freestanding (requires wall mounting)
Assembly Required	Yes



Image 4: Detailed diagram showing the dimensions of the pivot shower door, including overall width (A: 44-48"), height (B: 71"), access width (C: 22 1/16"), door width (D: 29 15/16"), and pivot panel width (P: 17 15/16").

5. INSTALLATION INSTRUCTIONS

This section provides general guidance for installing your Findepot Pivot Glass Shower Door. Refer to the detailed instruction manual included in your package for step-by-step diagrams and specific measurements.

5.1. Pre-Installation Checklist

- Confirm all package contents are present and undamaged.
- Ensure the shower opening width is between 44 and 48 inches and the height is 71 inches.
- Verify walls are plumb and level.
- Gather necessary tools: measuring tape, level, drill, drill bits (**IMPORTANT: Use a 6mm masonry drill bit for tile, NOT 5/16 inch or 8mm as some instructions may incorrectly state, to ensure proper anchor fit.**), screwdriver, caulk gun, silicone sealant.

5.2. General Installation Steps

1. **Measure and Mark:** Carefully measure the shower opening and mark the positions for the wall jambs (D) on the wall. Ensure the marks are level and plumb.
2. **Drill Holes:** Drill pilot holes at the marked positions. Insert wall anchors.
3. **Install Wall Jambs:** Secure the wall jambs (D) to the wall using the provided screws.
4. **Assemble Frame:** Attach the horizontal frame components to the wall jambs. The design allows for adjustment of up to 4 inches to fit your opening.
5. **Install Fixed Glass Panel:** Carefully place the fixed glass panel (Door Panel-2, F) into the frame. Ensure it is properly seated and secured.
6. **Install Pivot Door Panel:** Attach the pivot door panel (Door Panel-1, B) to the hinge (G) mechanism within the frame. This door can be installed for either left or right-hand opening.
7. **Attach Handle and Seals:** Install the handle (H) on the pivot door. Apply the bottom gasket (A), vertical gasket (C), magnetic strip (I), magnetic seal aluminum (J), magnetic seal wall jamb (K), and water seal (L) as per the manual to ensure a watertight enclosure.
8. **Seal with Silicone:** Apply a bead of silicone sealant along the exterior joints of the frame and wall to prevent water leakage. Allow adequate drying time before use.

ADJUSTABLE DESIGN


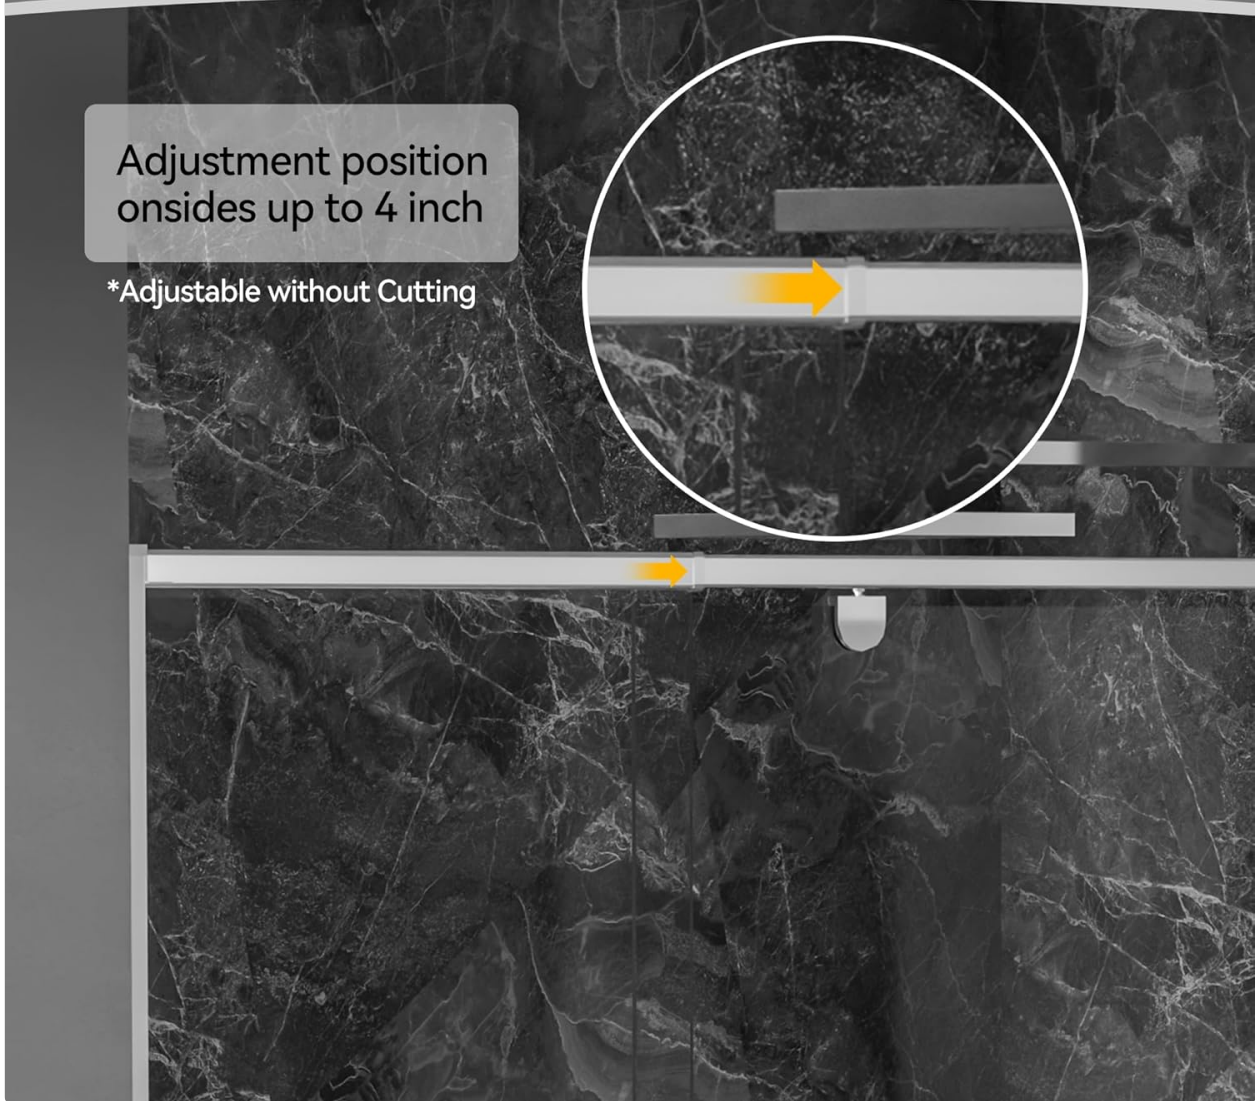


Image 5: Illustration demonstrating the adjustable design of the shower door, allowing for up to 4 inches of adjustment in width without requiring cutting.

REVERSIBLE INSTALLATION

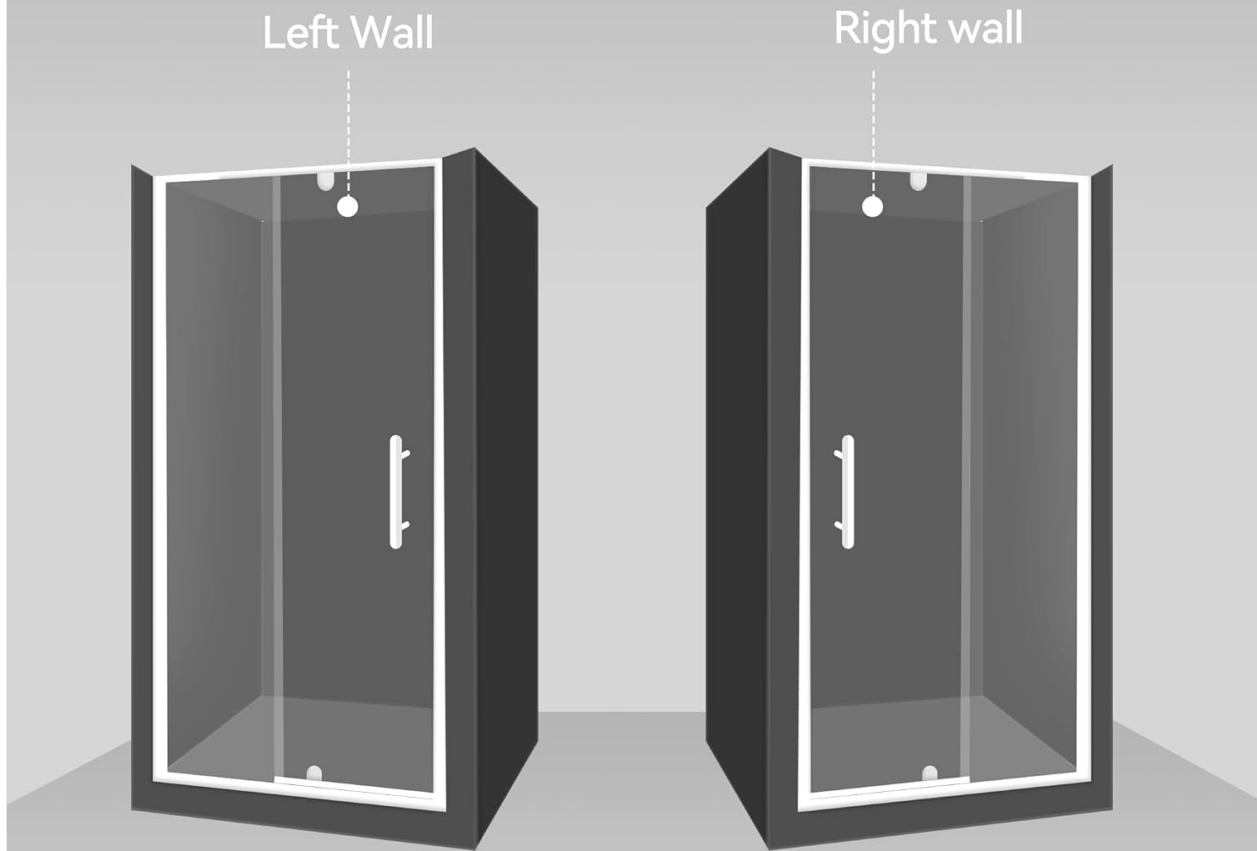

Reversible design can adapt Left or Right opening layout

Image 6: Diagram showing the reversible installation feature, allowing the shower door to be configured for either a left wall or right wall opening layout.



Image 7: Close-up view highlighting the high-quality materials and detailed controls, including the aluminum alloy frame, 304 stainless steel handle, 130° rotatable pivot, bottom aluminum seal, and side water stopper.

5.3. Installation Video Reference

Your browser does not support the video tag.

Video 1: This video provides a visual overview of the 44-48" W x 71" H Pivot Glass Shower Door, demonstrating its smooth 130-degree pivot design and premium protective glass coating. It highlights the transformation of a bathroom space with this shower door.

Your browser does not support the video tag.

Video 2: This video showcases the 28-54" W x 72" Pivot Glass Shower Door, emphasizing its adjustable and elegant design. It provides a general view of the product's features and appearance in a bathroom setting.

6. OPERATION

The Findepot Pivot Glass Shower Door features a smooth 130-degree pivot mechanism for convenient access.

- To open the door, gently push or pull the handle to pivot the door outwards or inwards, depending on your installation preference. The door can rotate up to 130 degrees.
- To close the door, guide it back until the magnetic seals engage, ensuring a secure and watertight closure.
- Avoid forcing the door beyond its intended pivot range.



Image 8: Overhead view of the shower door in an open status, illustrating the 130-degree rotatable pivot for easy entry and exit.

Matt Black



Brushed Nickel



Image 9: A visual comparison showing the shower door in both closed and open positions, demonstrating the pivot action.

7. MAINTENANCE AND CLEANING

Regular cleaning and maintenance will ensure the longevity and appearance of your shower door.

- **Glass Cleaning:** The glass features an easy-clean coating designed to guard against water stains and soap buildup. For daily cleaning, wipe the glass with a soft cloth and mild soap or a non-abrasive glass cleaner. Avoid harsh chemicals, abrasive pads, or scouring powders, as these can damage the coating and finish.
- **Frame and Hardware:** Clean the aluminum frame and stainless steel handle with a soft, damp cloth. Do not use abrasive cleaners or steel wool, which can scratch the finish or cause corrosion.
- **Seals:** Periodically check the water seals and gaskets for wear or damage. Clean any mold or mildew with a mild bathroom cleaner. Replace worn seals to maintain water tightness.
- **Hinges:** Ensure the pivot hinges operate smoothly. If they become stiff, a small amount of silicone-based lubricant can be applied, avoiding contact with the glass.

untreated

treated

PREMIUM PROTECTIVE CLASS COATING



No Stains.No Scum.
No Worries.



Easy to Clean



Protects Against Soap
& Limescale Buildup.



Image 10: Visual comparison of untreated versus treated glass, highlighting the benefits of the premium protective coating in preventing stains, scum, and buildup, making it easy to clean.

8. TROUBLESHOOTING

If you encounter issues with your shower door, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Water leakage from door edges	Worn or improperly installed seals/gaskets; insufficient silicone sealant.	Check all seals and gaskets for proper placement and condition. Reapply silicone sealant where necessary, ensuring a continuous bead. Replace damaged seals.
Door does not close smoothly or completely	Misaligned frame or hinges; debris in pivot mechanism; magnetic strips not engaging.	Verify the frame is plumb and level. Adjust hinges if possible. Clean any obstructions from the pivot mechanism. Ensure magnetic strips align and are free of debris.
Door is difficult to open/close	Stiff hinges; friction from seals.	Apply a small amount of silicone-based lubricant to the pivot points. Check if seals are binding and adjust if necessary.
Glass appears cloudy or stained	Hard water deposits or soap scum buildup.	Clean with a soft cloth and a mild, non-abrasive glass cleaner. For stubborn stains, use a cleaner specifically designed for hard water deposits on shower glass, following product instructions.

9. WARRANTY AND CUSTOMER SUPPORT

Findepot is committed to providing high-quality products. For any questions, missing parts, or concerns regarding your shower door, please refer to the contact information provided with your purchase or reach out to the retailer where the product was acquired.

This product typically includes a return policy (e.g., 30-day easy returns). Please consult your purchase documentation for specific warranty terms and conditions.

For direct assistance, you may contact Findepot customer service through their official channels, usually found on their website or product packaging.