

VTech VS112-2

VTECH VS112-2 DECT 6.0 Bluetooth 2 Handset Cordless Phone User Manual

Model: VS112-2

INTRODUCTION

This manual provides detailed instructions for the setup, operation, maintenance, and troubleshooting of your VTECH VS112-2 DECT 6.0 Bluetooth 2 Handset Cordless Phone. Please read this manual thoroughly to ensure proper use and to take full advantage of all features.



Image: The VTECH VS112-2 cordless phone system, showing two handsets and the base unit with an integrated answering machine.

SETUP

1. Unpacking and Initial Placement

- Carefully remove all components from the packaging.
- Place the base unit near a standard electrical outlet and a telephone wall jack.
- Ensure the location is away from heat sources, direct sunlight, and other electrical devices that may cause interference.

2. Connecting the Base Unit

1. Plug the small end of the power adapter into the power jack on the back of the base unit.
2. Plug the large end of the power adapter into a wall outlet.
3. Plug one end of the telephone line cord into the TEL LINE jack on the back of the base unit.
4. Plug the other end of the telephone line cord into a telephone wall jack.

3. Battery Installation and Charging

- Each handset requires 2 product-specific batteries (included).
- Open the battery compartment cover on the back of each handset.
- Insert the batteries, observing the correct polarity (+ and - markings).

- Replace the battery compartment cover.
- Place each handset in its respective charger cradle. The CHARGE light on the handset will illuminate, indicating proper charging.
- Allow the handsets to charge for at least 16 hours before initial use.

4. Connect to Cell Pairing

The Connect to Cell feature allows you to make and receive cellular calls using your cordless handsets. You can pair up to two cell phones or one cell phone and one Bluetooth headset.

1. Ensure your cell phone's Bluetooth is enabled and discoverable.
2. On the VTECH handset, navigate to the Bluetooth menu.
3. Select 'Pair New Device' and follow the on-screen prompts to search for and connect to your cell phone.
4. Confirm the pairing code on both devices if prompted.



Image: This image demonstrates the 'Connect to Cell' functionality, showing how the cordless phone integrates with mobile devices for call management.

5. Digital Answering System Setup

The system includes a digital answering machine with a voice guide to assist with setup.

- Access the Answering System menu on the handset or base unit.
- Follow the voice guide prompts to set the outgoing announcement, number of rings, and message alert tone.
- The system can record up to 22 minutes of messages, announcements, and memos.

OPERATING INSTRUCTIONS

1. Making and Receiving Calls

- **To make a call:** Press **HOME/FLASH** for a landline call or **CELL** for a cellular call, then dial the number.
- **To answer a call:** Press any dialing key (0-9, #, *) or **HOME/FLASH** or **CELL** when the phone rings.
- **To end a call:** Press **OFF/CANCEL** or place the handset in the charger.

2. Speakerphone Function

The handset features a full-duplex speakerphone, allowing both parties to speak and be heard simultaneously for natural conversations.

- During a call, press the **SPEAKER** button to activate the speakerphone.
- Press **SPEAKER** again to switch back to the earpiece.

Full-duplex Speakerphone



*This phone allows both ends to speak and be heard at the same time.
Enjoy conversations that are more true to life.*

Image: This image illustrates the full-duplex speakerphone in use, showing a user engaged in a hands-free conversation.

3. Smart Call Blocker

This feature helps filter unwanted calls, including robocalls. It can block up to 1,000 numbers.

- **To block a number during a call:** Press **CALL BLOCK**.
- **To block a number from Caller ID history:** Navigate to the Caller ID log, select the number, and press **CALL BLOCK**.
- **Robocall screening:** Set the system to ask callers to press the pound key.
- **Unknown caller screening:** Set the system to ask callers to record their names and press the pound key. The phone will announce the caller's name, allowing you to choose to answer, block, or send to voicemail.

A graphic titled "Smart Call Blocker" in blue text. It features a silver VTech cordless phone handset on its charging base. The handset's screen displays "VTECH", "000-555-9511", "ECO", "02", "10:08 PM", and "5121". A blue speech bubble with a red prohibition sign (a circle with a diagonal line) is positioned over the handset, pointing to the "CALL BLOCK" button on the keypad. The base unit also has a "CALL BLOCK" button and a "FIND HANDSET" button. The background is a light blue gradient.

Say goodbye to unwanted calls. Robocalls on your landline are automatically blocked from ever ringing through—even the first time. Up to 1,000 name and number call-block directory. (Note: use of smart call blocker feature requires a subscription to caller ID service.)

Image: This graphic represents the Smart Call Blocker feature, designed to prevent unwanted calls from ringing through.

1,000 name and number smart call block directory



You can permanently blacklist up to 1,000 numbers with one touch.

Image: This image illustrates the capacity of the smart call block directory, capable of storing up to 1,000 names and numbers.


4. Digital Answering System Operation

The answering system records incoming messages when you are unavailable.

- **Playing messages:** Press **PLAY/STOP** on the base unit or access the Answering System menu on the handset.
- **Recording a memo:** Access the Answering System menu and select 'Record Memo'.
- The LED message counter on the base unit displays the number of new messages.

Digital Answering Sytem

“Hi, Johnson.
Don't forget
our meeting,”

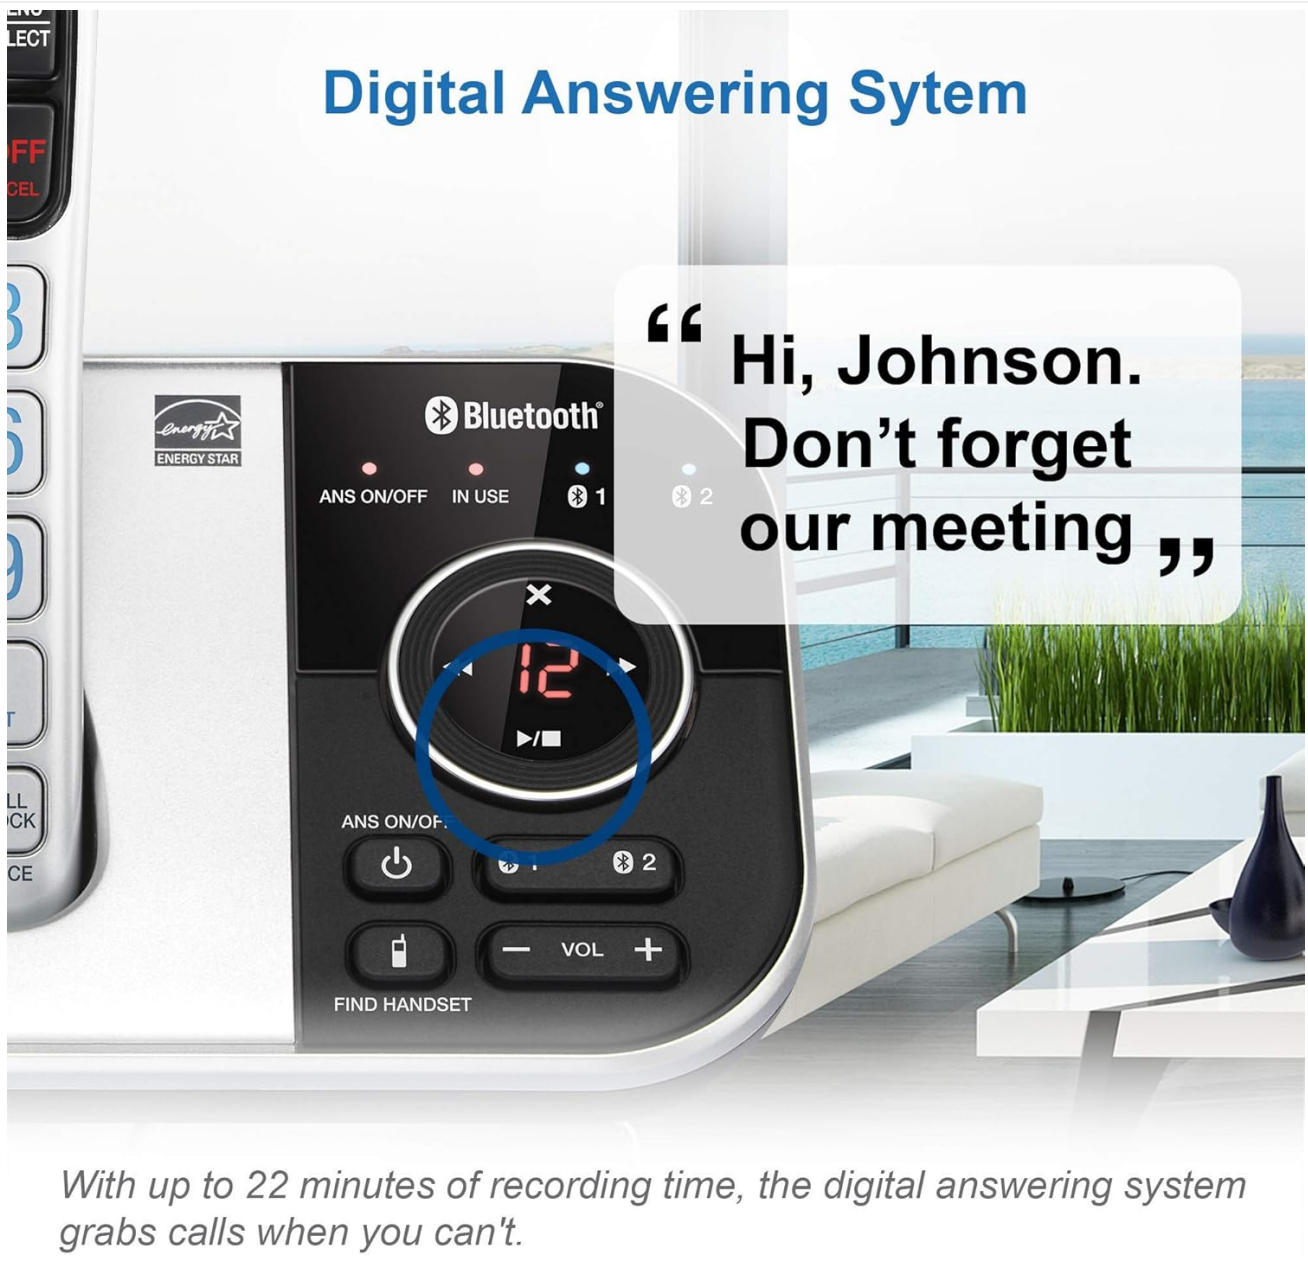

With up to 22 minutes of recording time, the digital answering system grabs calls when you can't.

Image: This image highlights the digital answering system, showing the message counter and a visual representation of a recorded message.

5. Caller ID and Call Waiting

The phone stores up to 50 name and number caller ID records.

- When a call comes in, the caller's name and number will display on the handset screen (requires subscription to caller ID service).
- If you have call waiting service, a tone will indicate an incoming second call. Press **FLASH** to switch between calls.

Caller ID/call Waiting



50 name and number caller ID history.

Image: This close-up shows the phone's screen displaying caller ID details, indicating an incoming call.

6. Intercom Function

Use the intercom feature to communicate between handsets.

- Press **INT** on one handset.
- The other handset will ring. Press any key to answer the intercom call.

7. Siri or Google Now Access

When connected to a cell phone via Bluetooth, you can access your smartphone's voice assistant.

- Press and hold the **CELL** button on the handset to activate Siri or Google Now.
- Speak your command into the handset.

8. Visual Ringer and Display

The handset features a visual ringer and a large, backlit display for enhanced usability.

- A light on top of the handset flashes during an incoming call, providing a visual alert, especially useful in noisy environments or for those with hearing impairments.
- The 2-inch high-contrast, white backlit display and enlarged, lighted keypad ensure easy readability and dialing in various lighting conditions.

Visual ringer



A light on the top of the handset flashes when the phone rings, signaling an incoming call. With the ringers muted, this visual indicator can let you know the calls in silence. Also helpful for those who are hearing impaired.

Image: This close-up shows the visual ringer, a light on the handset that flashes to signal an incoming call.

Big buttons & 2" white backlit display



High-contrast text on the extra-large 2" screen makes it easy to read incoming caller ID or call history records. Plus, the blue back lit handset keypad allows for easy dialing in low-light conditions.

Image: This image highlights the large buttons and the 2-inch white backlit display of the handset, designed for improved visibility and ease of use.

MAINTENANCE

1. Cleaning the Phone

- Wipe the phone and base unit with a soft, slightly damp cloth.
- Do not use cleaning sprays or liquid cleaners, as they may damage the finish or electrical components.
- Ensure the phone is unplugged from the power source before cleaning.

2. Battery Care

- To maintain optimal battery performance, keep the handsets in their chargers when not in use.
- If the phone will be unused for an extended period, remove the batteries to prevent leakage.
- Replace batteries when they no longer hold a charge effectively.

TROUBLESHOOTING

If you experience issues with your phone, try the following troubleshooting steps:

No Dial Tone

- Ensure the base unit's power adapter is securely plugged into a working electrical outlet.
- Verify the telephone line cord is properly connected to both the base unit and the wall jack.
- Check if other phones on the same line have a dial tone. If not, the issue may be with your telephone service.

Handset Not Charging

- Ensure the handset is correctly seated in the charger cradle. The CHARGE light should illuminate.
- Clean the charging contacts on both the handset and the charger with a dry cloth.
- Verify the charger's power adapter is plugged into a working outlet.

Poor Call Quality or Static

- Move the handset closer to the base unit.
- Avoid placing the base unit near large metal objects, other cordless phones, Wi-Fi routers, or microwave ovens.
- If using Connect to Cell, ensure your cell phone is within range of the base unit.

Call Blocking Not Working

- Ensure you have correctly added the numbers to the call block list.
- Verify that the Smart Call Blocker feature is enabled in the phone's settings.
- Note that some call blocking features may require a subscription to caller ID service from your telephone provider.

Answering System Issues

- Ensure the answering system is turned ON.
- Check the memory capacity; if full, delete old messages.
- Verify the number of rings setting.

SPECIFICATIONS

Brand	VTech
Model	VS112-2
Telephone Type	Cordless
Technology	DECT 6.0, Bluetooth
Number of Handsets	2
Answering System Type	Digital
Answering System Recording Time	Up to 22 minutes
Caller Identification	Yes
Smart Call Blocker Capacity	Up to 1,000 numbers
Display	2-inch, high-contrast, white backlit
Power Source	Corded Electric

Batteries	2 Product Specific batteries required (included)
Product Dimensions	5.95 x 3.33 x 7.36 inches
Item Weight	1.82 pounds

WARRANTY AND SUPPORT







Amazon Renewed Guarantee


This product is offered as an Amazon Renewed item. Amazon Renewed products are professionally inspected and tested to work and look like new. If you are not satisfied with your purchase, renewed products are eligible for replacement or refund under the Amazon Renewed Guarantee.

Manufacturer Support

For further assistance, technical support, or detailed warranty information beyond the Amazon Renewed Guarantee, please refer to the official VTech website or contact VTech customer service directly. Contact information can typically be found on the manufacturer's website or in the original product packaging.

Related Documents - VS112-2

	VTech VS112 Series Cordless Phone with Smart Call Blocker - User Guide Learn how to set up and use your VTech VS112 Series DECT 6.0 cordless phone system. This guide covers Smart Call Blocker features, Bluetooth connectivity, answering system functions, caller ID, and basic operation for efficient home communication.
	VTech Smart Call Blocker VS112 Series: User Guide and Setup Learn how to set up and use the VTech Smart Call Blocker feature on your VS112 series DECT 6.0 cordless telephone system to filter robocalls and unwanted callers.
VG 208 208-2   User's manual	VTech VG208 / VG208-2 User Manual: Features, Safety, and Operation Guide Comprehensive user manual for the VTech VG208 and VG208-2 DECT 6.0 cordless phones. Learn about installation, operation, features like answering machine, caller ID, call blocking, intercom, safety instructions, and technical specifications.
	VTech VS112-0 Accessory Handset User's Manual User's manual for the VTech VS112-0 DECT 6.0 accessory handset, covering setup, registration, safety instructions, features, and technical specifications. Includes information on battery care, warranty, and regulatory compliance.
	VTech CS2050/CS2051/CS2052/CS2053 Quick Start Guide Comprehensive guide to setting up and using your VTech CS2050, CS2051, CS2052, or CS2053 cordless phone system, including safety instructions, product registration, warranty information, and feature setup.



[VTech IS8151 Smart Call Blocker: User Guide and Setup](#)

Learn how to use the VTech IS8151 Smart Call Blocker to filter robocalls and unwanted calls. This guide provides setup instructions, configuration options, and tips for managing your call lists for your DECT 6.0 cordless telephone system.