

[manuals.plus](#) /› [saschedross](#) /› [saschedross AC Adapter for Dejavoo Z8 VEGA3000 Terminal - User Manual](#)

saschedross 9VDC 4A AC Adapter

saschedross AC Adapter for Dejavoo Z8 VEGA3000 Terminal - User Manual

Model: 9VDC 4A AC Adapter

1. IMPORTANT SAFETY INSTRUCTIONS

Please read and understand all safety instructions before using this product. Failure to follow these instructions may result in electric shock, fire, or other hazards.

- Do not expose the adapter to rain, moisture, or excessive humidity.
- Do not use the adapter if the cord or plug is damaged.
- Ensure the adapter is connected to a properly grounded outlet.
- Do not disassemble or modify the adapter. Refer all servicing to qualified personnel.
- Keep the adapter away from heat sources and direct sunlight.
- Ensure the voltage and current ratings of the adapter match the requirements of your device (Dejavoo Z8 VEGA3000 Terminal).

2. PRODUCT OVERVIEW

This saschedross AC Adapter is designed as a replacement power supply for the Dejavoo Z8 VEGA3000, Vega 3000 Magnetic POS Credit Debit EBT Card Terminal. It provides a stable 9V DC output at 4A (4000mA) to ensure reliable operation of your terminal.

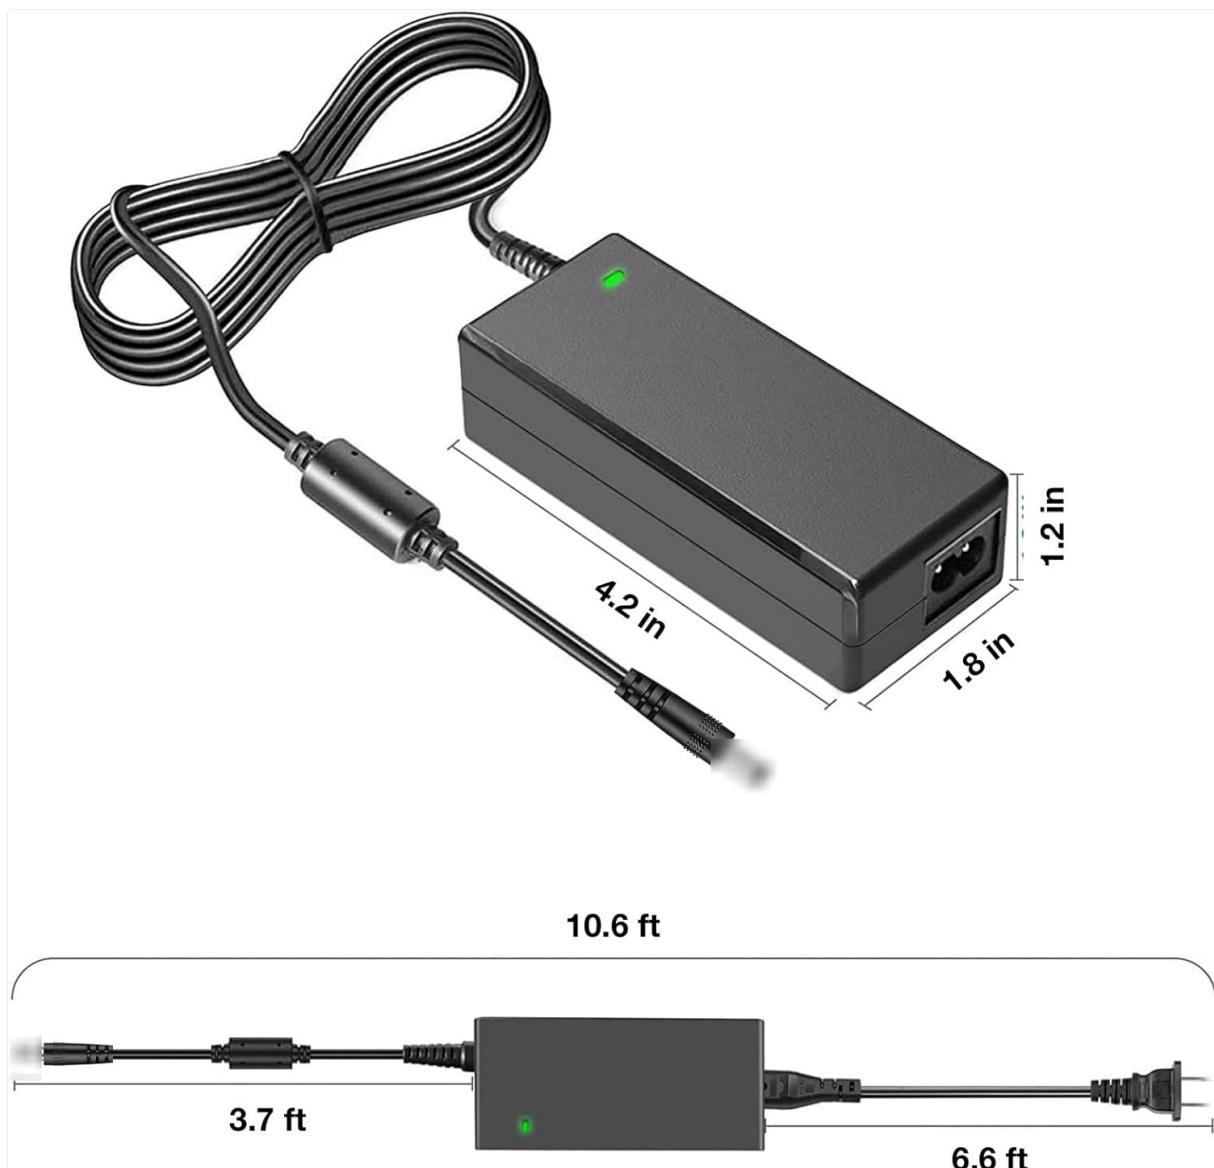


Figure 1: AC Adapter with key dimensions. The adapter unit measures approximately 4.2 inches in length, 1.8 inches in width, and 1.2 inches in height. The total cable length is approximately 10.6 feet, with the DC output cable being 3.7 feet and the AC input cable being 6.6 feet.

The package includes one AC adapter unit. This adapter features a 2-pin connector type suitable for the specified Dejavoo terminals.

3. SETUP INSTRUCTIONS

Follow these steps to properly connect your AC adapter to the Dejavoo Z8 VEGA3000 Terminal:

- 1. Verify Compatibility:** Ensure that your Dejavoo Z8 VEGA3000 or Vega 3000 terminal requires a 9V DC, 4A power supply with a 2-pin connector.
- 2. Connect DC Output:** Plug the DC output connector of the adapter firmly into the power input port of your Dejavoo terminal.
- 3. Connect AC Input:** Insert the AC input cable into the adapter's AC inlet. Then, plug the other end of the AC input cable into a standard 110V AC wall outlet.
- 4. Power On:** Once connected, the adapter's indicator light (if present) should illuminate, and your terminal should receive power.



Figure 2: The AC adapter connected to a power outlet, ready for use with the terminal.

4. OPERATING INSTRUCTIONS

Once properly connected, the AC adapter will continuously supply power to your Dejavoo Z8 VEGA3000 terminal. The green LED indicator on the adapter signifies that power is being supplied. No further user interaction is required for basic operation.

- Ensure the adapter is placed in a well-ventilated area to prevent overheating.
- Disconnect the adapter from the power outlet when not in use for extended periods.

5. MAINTENANCE

Proper maintenance ensures the longevity and safe operation of your AC adapter.

- **Cleaning:** Disconnect the adapter from the power source and the terminal before cleaning. Use a soft, dry cloth to wipe the exterior. Do not use liquid cleaners or aerosols.
- **Storage:** Store the adapter in a cool, dry place away from direct sunlight and extreme temperatures when not in use. Avoid tightly coiling the cables to prevent damage.
- **Inspection:** Periodically inspect the power cord and adapter housing for any signs of damage, such

as cuts, fraying, or cracks. If damage is found, discontinue use and replace the adapter.

6. TROUBLESHOOTING

If you encounter issues with your AC adapter, refer to the following common troubleshooting steps:

Problem	Possible Cause	Solution
No power to terminal	Adapter not plugged in. Wall outlet is not active. Loose connection. Damaged adapter or cable.	Ensure both AC and DC cables are fully inserted. Test the wall outlet with another device. Check all connections for tightness. Inspect cables for damage. If damaged, replace the adapter.
Adapter is hot to touch	Normal operation (slight warmth). Poor ventilation. Overload or internal fault.	Ensure adequate airflow around the adapter. If excessively hot, disconnect immediately and contact support.

7. SPECIFICATIONS

Technical specifications for the saschedross AC Adapter:

- Brand:** saschedross
- Manufacturer:** Shenzhen Waweis Technology Co., Ltd
- Input Voltage:** 110 Volts (AC)
- Output Voltage:** 9 Volts (DC)
- Output Current:** 4 Amperes (4000mA)
- Connector Type:** 2-Pin
- Compatible Devices:** Dejavoo Z8 VEGA3000, Vega 3000 Magnetic POS Credit Debit EBT Card Terminal
- Included Components:** 1 x AC Adapter
- Color:** Black
- Special Feature:** High Quality

8. WARRANTY AND SUPPORT

This product is covered by a standard manufacturer's warranty. For specific warranty details, please refer to the documentation provided with your purchase or contact the seller directly.

For technical support, troubleshooting assistance, or warranty claims, please contact your point of purchase or the manufacturer, Shenzhen Waweis Technology Co., Ltd, through their official channels.

