



[Manuals.plus](#) /

> [SOLRIG](#) /

> SOLRIG 60x80 Inch 1-Lite Mirror MDF Sliding Closet Door Instruction Manual

SOLRIG 60x80 Inch 1-Lite Mirror Sliding Closet Door

SOLRIG 60x80 Inch 1-Lite Mirror MDF Sliding Closet Door Instruction Manual

Model: 60x80 Inch 1-Lite Mirror Sliding Closet Door

1. INTRODUCTION

Thank you for choosing the SOLRIG 60x80 Inch 1-Lite Mirror MDF Sliding Closet Door. This manual provides essential information for the safe and correct installation, operation, and maintenance of your new sliding closet door. Please read all instructions carefully before beginning installation and retain this manual for future reference.

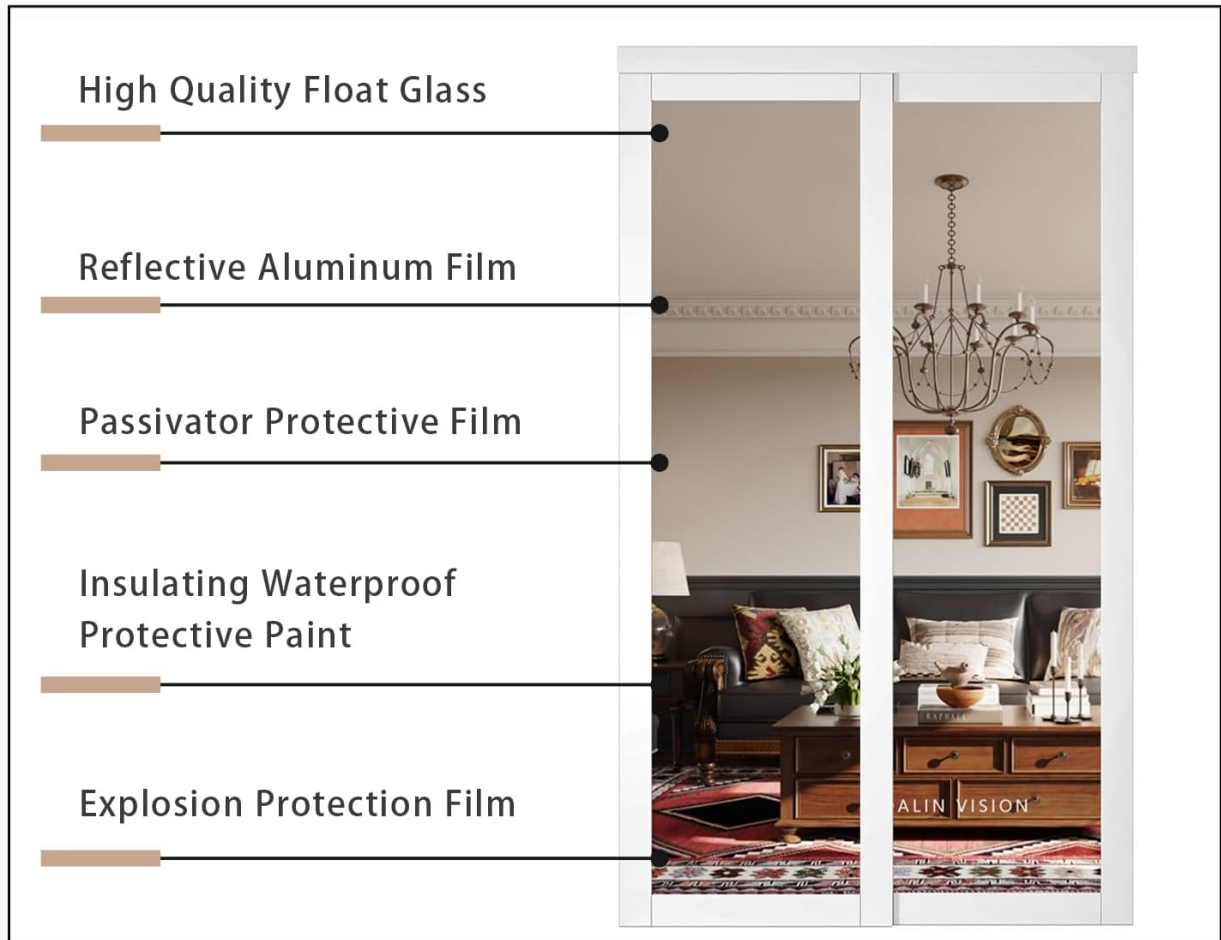


Image 1.1: The SOLRIG 60x80 Inch 1-Lite Mirror MDF Sliding Closet Door provides a space-saving and aesthetically pleasing solution for closet openings.

2. SAFETY INFORMATION

- Always wear appropriate safety gear, including gloves and eye protection, during installation.
- The door panels are heavy. Exercise caution and use proper lifting techniques or seek assistance to prevent injury.
- Ensure the installation surface (wall/ceiling) is structurally sound and capable of supporting the weight of the doors and track system.
- Keep children and pets away from the installation area.
- Handle mirror panels with care to avoid breakage. The mirror is designed with explosion protection film for added safety.

SAFETY GLASS MIRRORS



HD Imaging



No Deformation



Shatter-Proof



Eco-Friendly Material

Image 2.1: The mirror panels feature multiple layers for enhanced durability and safety, including an explosion protection film.

3. PACKAGE CONTENTS

Verify that all components are present and undamaged before beginning installation. If any parts are missing or damaged, please contact customer support.

- 2 x Door Panels (1-Lite Mirror on front, white panel on back)
- 1 x Hardware Track Kit (includes top track, rollers, floor guides, and connectors)
- Installation Screws and Fasteners
- Instruction Manual


4. SPECIFICATIONS

Feature	Detail
Brand	SOLRIG

Feature	Detail
Model	60x80 Inch 1-Lite Mirror Sliding Closet Door
Material	Engineered Wood (MDF) with Safety Glass Mirror
Overall Door Opening Size	60 inches (Width) x 80 inches (Height)
Actual Single Door Panel Size	30.98 inches (Width) x 78.58 inches (Height) x 0.82 inches (Thickness)
Item Weight	Approximately 90 pounds
Assembly Required	Yes

SLIDING CLOSET DOORS SIZE CHART

PANEL SIZE	ADAPT TO THE WIDTH OF THE DOOR OPENNING	ACTUAL SINGLE DOOR WIDTH	ACTUAL DOUBLE DOOR WIDTH
60" * 80"	60" 1524mm	30.98" 787mm	60" 1524mm

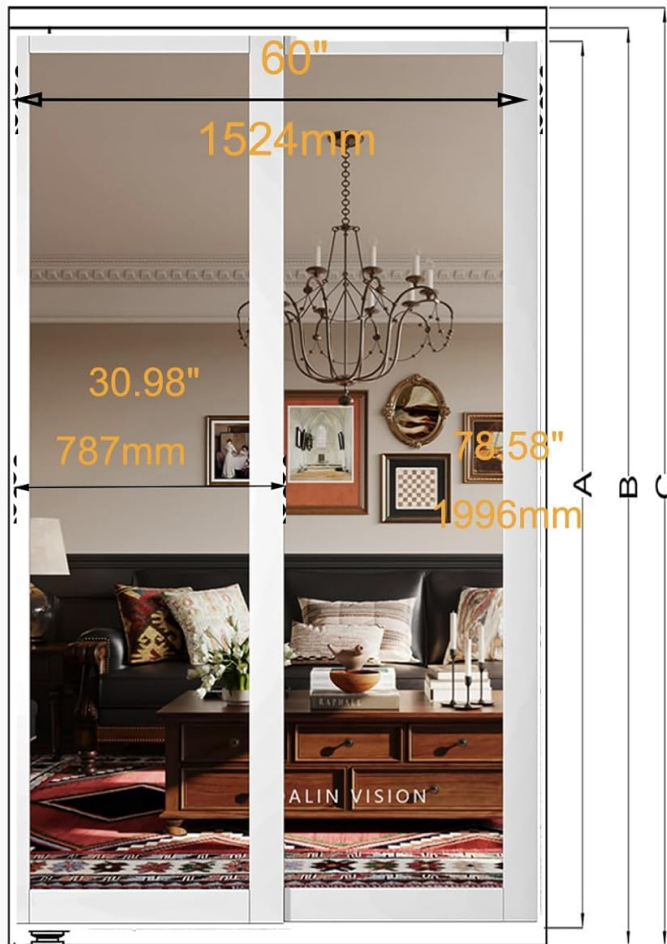

A ACTUAL HEIGHT	B FIT OPENING HEIGHT
78.58" 1996mm	80" 2032mm
C FIT OPENING HEIGHT AND TRACK	DOOR PANEL THICKNESS
80 11/16" 2049mm	0.82" 21mm

Note: Please carefully look at the **actual size of the door panel** and the **applicable door opening** before purchasing.

If you have any questions, please do not hesitate to **contact us**.

Image 4.1: Refer to the size chart to ensure compatibility with your door opening. Note the actual panel dimensions versus the recommended opening size.

High Quality MDF



**Eco-friendly
materials**



No Warping



**Smoother
Finish**



**Better Stable
and Hard**

Image 4.2: The doors are constructed from high-quality MDF, known for its stability and environmental friendliness.

5. INSTALLATION INSTRUCTIONS

This section outlines the general steps for installing your sliding closet door. Specific details may vary; always refer to the included hardware kit instructions for precise measurements and fastener types.

1. **Prepare the Opening:** Ensure your door opening measures approximately 60 inches wide by 80 inches high. The opening should be plumb, level, and free of obstructions.
2. **Install the Top Track:** Mount the top track securely to the header of your door opening. Use the provided 4x top connectors and screws. Ensure the track is level and properly aligned.
3. **Attach Rollers to Door Panels:** Secure the sliding door rollers to the top edge of each door panel according to the hardware instructions.
4. **Hang the Door Panels:** Carefully lift each door panel and engage the rollers with the top track. Ensure the panels hang freely and can slide smoothly.
5. **Install Floor Guides:** Position the floor guides to prevent the bottom of the doors from swinging. These guides enhance stability and ensure smooth operation.
6. **Adjust and Test:** Make any necessary adjustments to the rollers or guides to ensure the doors slide quietly and without obstruction. Test the full range of motion for both panels.

SLIDING DOOR HARDWARE



1

Sliding Door Rollers
Quiet Operation



2

Sliding Floor Guides
Stability Enhancement



3

Sliding Door Tracks
Rugged Build

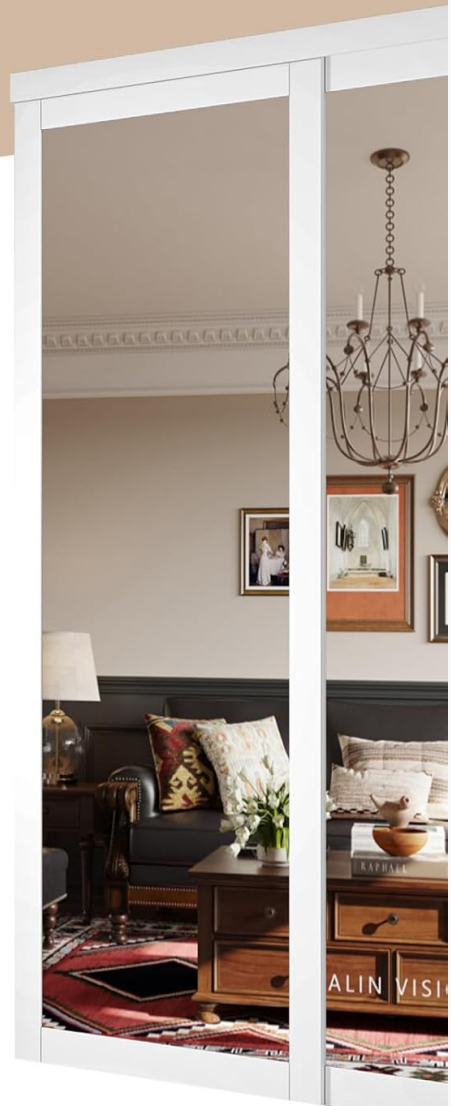


Image 5.1: Key hardware components include quiet-operating rollers, stability-enhancing floor guides, and robust tracks.

6. OPERATING INSTRUCTIONS

To operate your SOLRIG sliding closet doors, simply grasp the edge of a door panel and gently slide it along the top track. The rollers and floor guides are designed for smooth and quiet movement. Avoid forcing the doors, as this can cause damage to the track or panels.

7. MAINTENANCE

- **Cleaning the Mirror:** Use a soft, lint-free cloth and a standard glass cleaner to clean the mirror surface. Avoid abrasive cleaners or tools that could scratch the mirror or frame.
- **Cleaning the MDF Panels:** Wipe MDF surfaces with a soft, damp cloth. Avoid excessive moisture. For stubborn marks, use a mild, non-abrasive cleaner.
- **Track Maintenance:** Periodically inspect the top track and floor guides for any debris or dust accumulation. Clean the tracks with a vacuum or a damp cloth to ensure smooth operation.
- **Hardware Check:** Occasionally check all screws and fasteners to ensure they are tight. Retighten if necessary.

8. TROUBLESHOOTING

Problem	Possible Cause	Solution
Doors are difficult to slide or stick	Debris in track, misaligned rollers, loose fasteners	Clean tracks, check roller alignment, tighten fasteners.
Doors wobble or are unstable	Loose floor guides, uneven installation	Ensure floor guides are securely fastened and properly positioned. Verify track is level.
Noise during operation	Dry rollers, debris in track	Clean tracks. A small amount of silicone lubricant can be applied to rollers if needed.

9. CUSTOMER SUPPORT

SOLRIG is committed to providing excellent customer service. If you encounter any issues, have questions, or require assistance with damaged or missing parts, please do not hesitate to contact our support team. We are dedicated to ensuring your satisfaction.



Image 9.1: For any inquiries or support, please reach out to our customer service team.