

[Manuals.plus](#) /

› [YAMATIC](#) /

› YAMATIC Pressure Washer Tips, Turbo Nozzle, Gun, and Spray Nozzles User Manual

YAMATIC 819effc7-93b1-4297-a83a-72fac54d0f03

YAMATIC Pressure Washer Tips, Turbo Nozzle, Gun, and Spray Nozzles User Manual

Model: 819effc7-93b1-4297-a83a-72fac54d0f03

INTRODUCTION

This manual provides detailed instructions for the safe and effective use of your YAMATIC Pressure Washer Tips, Turbo Nozzle, Gun, and Spray Nozzles. Please read this manual thoroughly before operation and retain it for future reference. This product is designed to enhance your pressure washing capabilities for various cleaning tasks.

WHAT'S INCLUDED

The package includes the following components:

- 1 x Pressure Washer Turbo Nozzle
- 1 x Pressure Washer Gun
- 5 x Quick-Connect Spray Nozzle Tips (0°, 15°, 25°, 40°, 65°/Soap)



Image: Overview of the YAMATIC pressure washer kit, showing the turbo nozzle, pressure washer gun, and the set of five quick-connect spray nozzles.

SETUP

Follow these steps to set up your pressure washer accessories:

1. **Connect the Pressure Washer Gun:** The pressure washer gun features an M22-14mm male inlet. Connect your pressure washer hose to this inlet. Ensure a secure, leak-free connection. Teflon tape can be used for a tighter seal if needed.
2. **Attach Nozzle Tips:** The gun has a universal 1/4" quick connector outlet. To attach a spray nozzle tip or the turbo nozzle, pull back the collar on the quick connector, insert the desired nozzle, and release the collar to lock it in place. Ensure the nozzle is firmly seated before operation.

UNIVERSAL

1/4" CONNECT



5 QUICK-CONNECT NOZZLE TIPS (0°, 15°, 25°, 40°, SOAP)

Image: A close-up view demonstrating how to connect a quick-connect nozzle tip to the pressure washer gun's universal 1/4" quick connector.

OPERATING INSTRUCTIONS

Proper operation ensures effective cleaning and extends product life.

Using the Spray Nozzle Tips

The kit includes five color-coded quick-connect spray nozzle tips, each designed for a specific spray pattern and application:

- **Red (0°):** Pin-point jet for intense cleaning of small, tough spots. Use with extreme caution as it can damage surfaces.
- **Yellow (15°):** Narrow fan spray for concentrated cleaning of hard surfaces like concrete or brick.
- **Green (25°):** Medium fan spray for general cleaning of decks, patios, and driveways.
- **White (40°):** Wide fan spray for gentle cleaning of delicate surfaces like vehicles, siding, or windows.
- **Black (65°/Soap):** Low-pressure wide fan spray for applying detergents or rinsing.

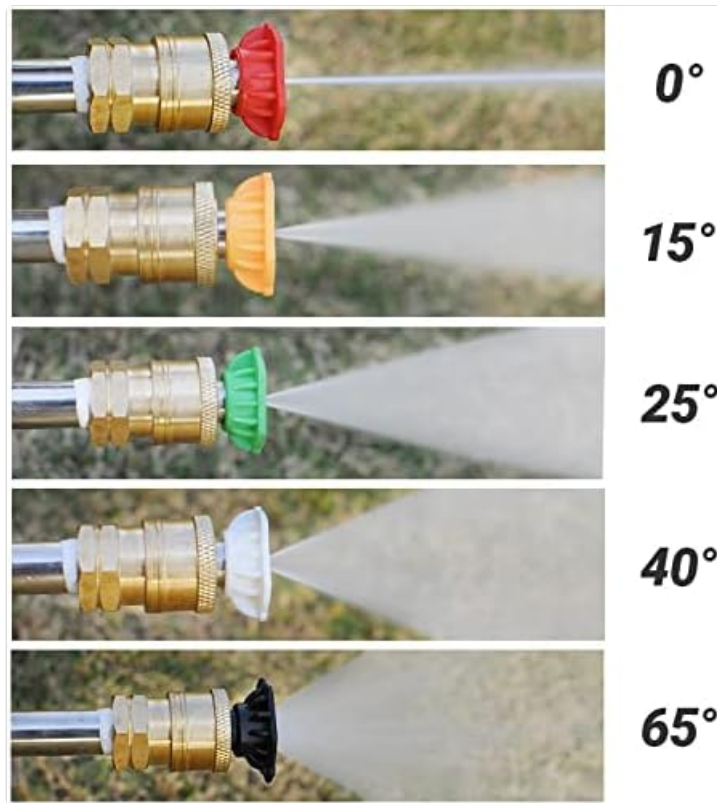


Image: Visual representation of the spray patterns produced by the 0°, 15°, 25°, 40°, and 65° (soap) quick-connect nozzles.

Using the Turbo Nozzle

The turbo nozzle provides a powerful, oscillating jet of water, ideal for cleaning larger, heavily soiled areas. It combines the intensity of a 0° stream with the coverage of a wider fan spray. The internal ceramic ball spins under pressure, creating a conical spray pattern that rotates rapidly.

- Attach the turbo nozzle to the pressure washer gun's quick connector.
- Maintain a safe distance from the surface being cleaned, typically 6-12 inches, and move the nozzle steadily.
- The turbo nozzle is effective for removing stubborn dirt, grime, and mildew from concrete, asphalt, and other durable surfaces.

FAST and POWERFUL

**UP TO 3000 PSI
4.0 GPM**

- ✓ **Cleaning Faster**
- ✓ **Efficiency Higher**
- ✓ **Save your time**

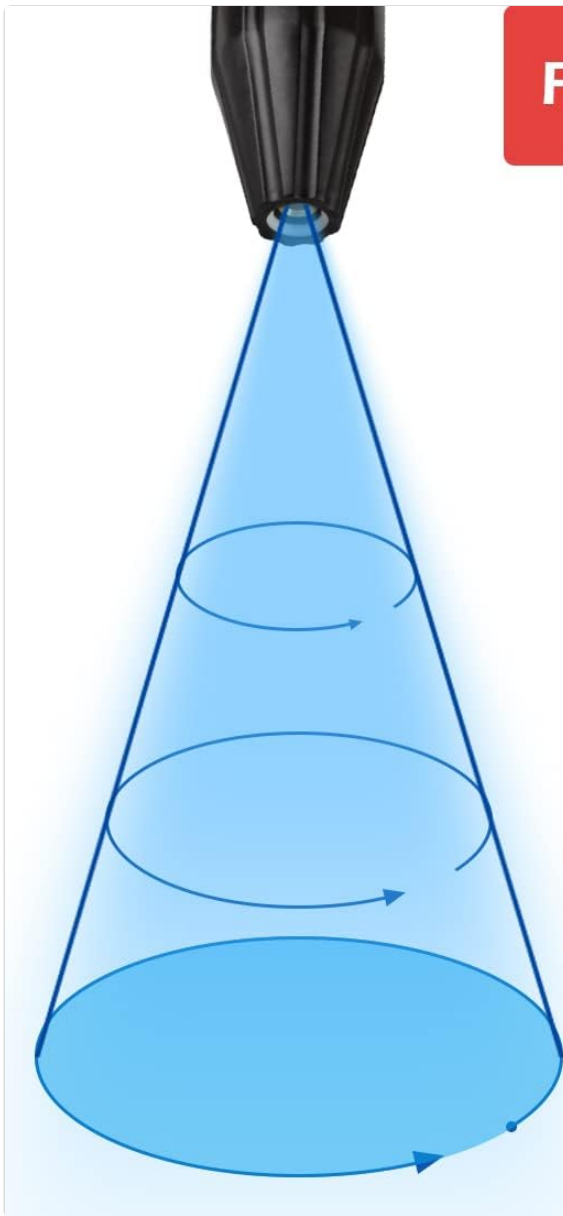


Image: Diagram illustrating the rotating conical spray pattern of the turbo nozzle, highlighting its effectiveness for fast and powerful cleaning.

One-piece Design



Avoiding screws
loosening under
high-pressure rotation
working and prevents
water leaking



Image: Close-up of the turbo nozzle, emphasizing its one-piece design to prevent loosening and leaking under high pressure.

A+ Ceramic Ball



**Wear resistance than metal,
provide powerful jet of water**

Image: Cutaway view showing the A+ ceramic ball inside the turbo nozzle, highlighting its wear resistance and ability to produce a powerful jet of water.

Pressure Washer Gun Operation


The pressure washer gun is designed for comfortable and efficient use. It features an easy-pull trigger requiring minimal tension to operate, reducing hand fatigue during extended use.

EASY PULL TRIGGER



ONLY 2 POUNDS Tension to keep it held

Image: A hand operating the pressure washer gun, illustrating the ease of pulling the trigger with only 2 pounds of tension required.

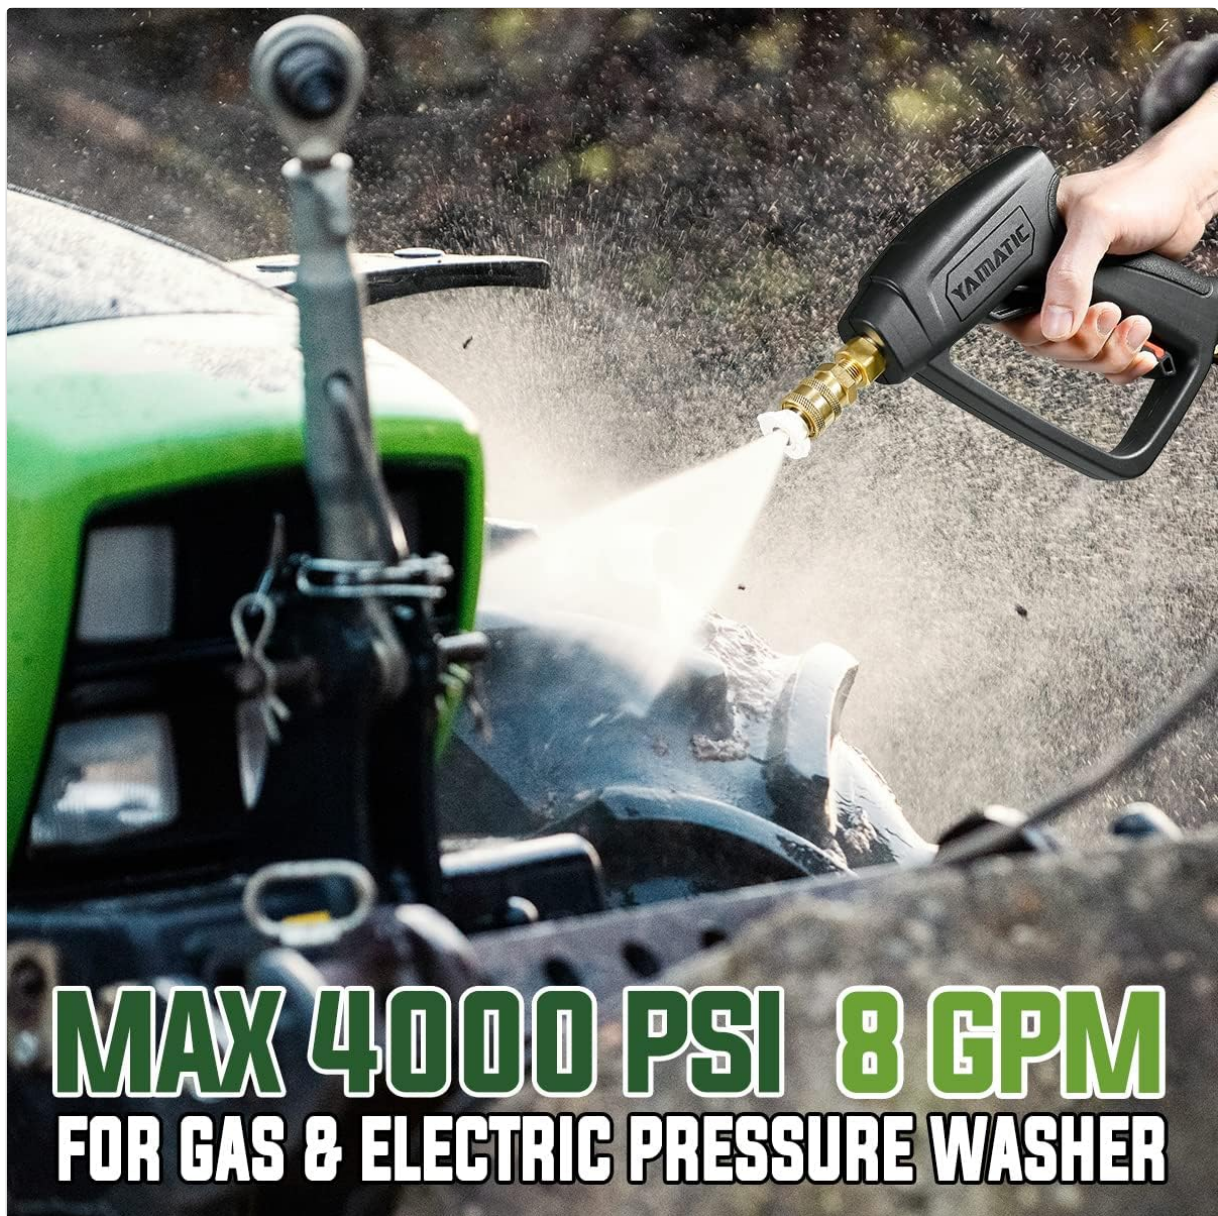

MAX 4000 PSI 8 GPM
FOR GAS & ELECTRIC PRESSURE WASHER

Image: The pressure washer gun being used to clean a tractor, demonstrating its application for heavy-duty cleaning tasks.

MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your YAMATIC pressure washer accessories:

- **After Each Use:** Flush the gun and nozzles with clean water to remove any detergent residue or debris.
- **Nozzle Cleaning:** If a nozzle becomes clogged, use a small wire or nozzle cleaning tool to clear the obstruction.
- **Storage:** Store the gun and nozzles in a clean, dry place, protected from freezing temperatures.
- **Inspect Connections:** Periodically check all connections for wear or damage. Replace worn O-rings or fittings as necessary to prevent leaks.

TROUBLESHOOTING

Here are some common issues and their solutions:

Problem	Possible Cause	Solution
No water flow or low pressure from nozzle.	Clogged nozzle tip; insufficient water supply; air in the system.	Clean the nozzle tip; ensure adequate water supply to the pressure washer; purge air from the system by running water through the gun without a nozzle until flow is steady.
Water leaking from connections.	Loose connections; worn O-rings; damaged fittings.	Tighten all connections; inspect and replace worn O-rings; replace damaged fittings.
Turbo nozzle not rotating.	Clogged internal mechanism; insufficient pressure.	Flush the turbo nozzle with clean water; ensure your pressure washer meets the minimum PSI requirement for the turbo nozzle.

SPECIFICATIONS

Key technical specifications for the YAMATIC Pressure Washer Tips, Turbo Nozzle, Gun, and Spray Nozzles:

Feature	Specification
Brand	YAMATIC
Model Number	819effc7-93b1-4297-a83a-72fac54d0f03
Material	Brass, Ceramic
Maximum Operating Pressure	3500 PSI (Pound per Square Inch)
Water Flow (Turbo Nozzle)	Up to 4.0 GPM (Gallons Per Minute)
Working Temperature	32°F - 140°F (0°C - 60°C)
Inlet Connection (Gun)	M22-14mm Male
Outlet Connection (Gun)	1/4" Quick Connector
Nozzle Tips Included	0°, 15°, 25°, 40°, 65° (Soap)

TOP MATERIAL

**DURABLE
BRASS
ADAPTER**

**INTERNAL
SOLID
CONSTRUCTION**

**HIGH QUALITY
DURABLE
SHELL**



Image: Diagram highlighting the durable brass adapter, solid internal construction, and high-quality durable shell of the pressure washer gun.

WARRANTY AND SUPPORT

YAMATIC products are manufactured to high-quality standards. For specific warranty information and customer support, please refer to the warranty card included with your purchase or visit the official YAMATIC website. You can also contact YAMATIC customer service through the retailer where the product was purchased.

For more products and accessories, visit the [YAMATIC Store on Amazon](#).