Findepot SD4-BN5975

Findepot Frameless Double Sliding Shower Door

Model: SD4-BN5975

Introduction

This manual provides detailed instructions for the installation, operation, and maintenance of your Findepot Frameless Double Sliding Shower Door. Please read all instructions carefully before beginning installation to ensure proper function and safety. Keep this manual for future reference.



The Findepot Frameless Double Sliding Shower Door, featuring clear tempered glass and brushed nickel hardware.


Safety Information

Your Findepot shower door is designed with safety in mind. It features 5/16" (8mm) ANSI-certified tempered glass, which is thick and durable. An explosion-proof film is applied to the glass to help prevent harmful splashes if the glass breaks. Always handle glass panels with care.

- Always wear appropriate safety gear, including gloves and eye protection, during installation.
- Ensure the installation surface is structurally sound and level.
- Do not apply excessive force to the glass panels.
- Allow all adhesives and sealants to cure completely before using the shower.

PREMIUM SAFETY

Findepot Glass Shower Door with 5/16" ANSI Certified Tempered Glass with Shatter Resistant Film for added safety.

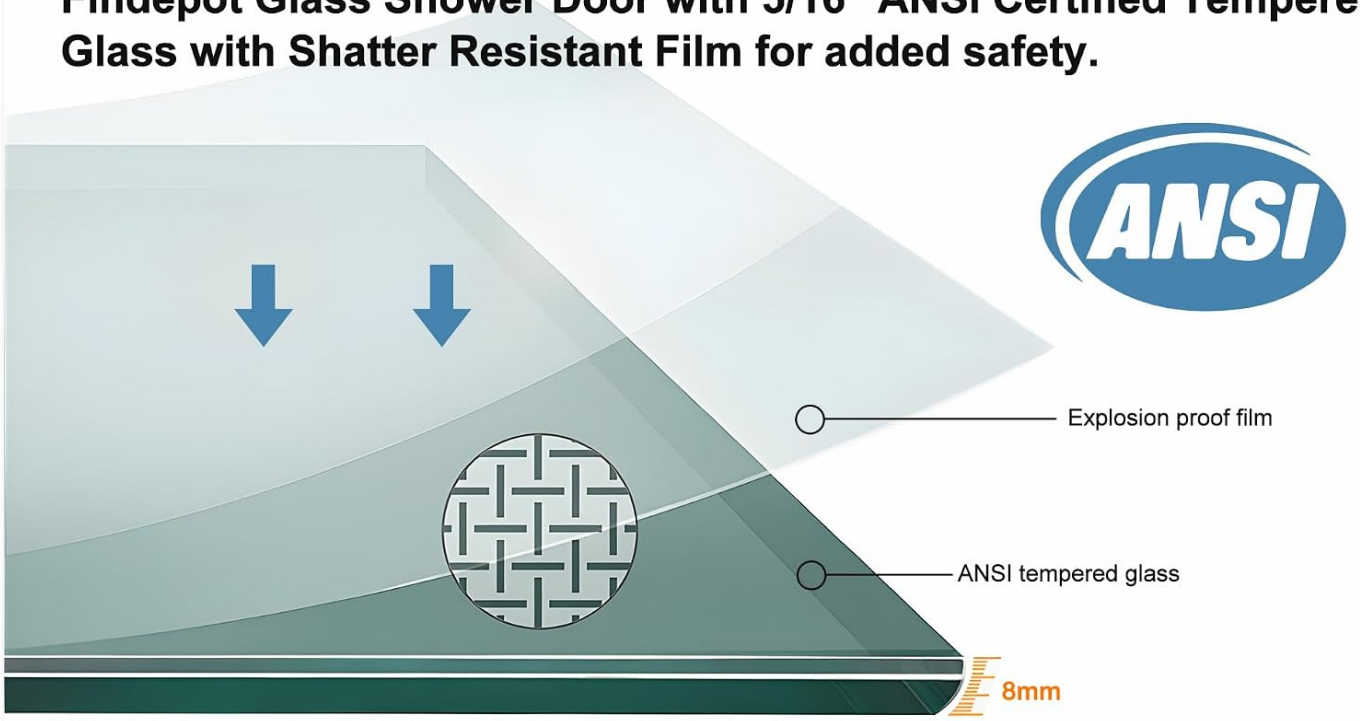

Glass Protector



Covered with explosion-proof filmto prevent shards from scattering in case of breakage

Nano Self-cleaning



Crystal clear glass is protected against water stain, soap scum and limescale build up

Premium safety features include 5/16" (8mm) ANSI-certified tempered glass with shatter-resistant film.



SGCC certified ultra-clear glass with explosion-proof film for superior safety and clarity.

Setup and Installation

This section guides you through the installation process. For a visual guide, please refer to the installation video below. Ensure all necessary hardware is present before starting.

Pre-Installation Steps:

1. **Measure Bathroom Width:** Use a leveling device to accurately measure the width of the shower base and the walls on both sides. The adjustable width of this frameless double sliding door is 55-60 inches.
2. **Cut Upper Guide Rail:** Cut the Upper Guide Rail (J) to the appropriate length based on your bathroom's width. Sand the cut surface smooth.
3. **Mark Wall Positions:** Use the provided templates (M) to mark the positions for drilling holes on the walls for the Wall Bracket Assembly (I). Also, mark the lower position for the Bottom Rail (B) installation. Ensure marks are aligned for correct angle.
4. **Drill Holes and Install Wall Anchors:** Drill the marked holes and insert wall anchors (dd). Secure the Wall Bracket Assembly (I) with screws (cc).
5. **Prepare Upper Guide Rail:** Install the two Outside Rollers (H) onto the Upper Guide Rail (J). Insert the Anti-Fluctuator (F) into the rail.

Main Installation Steps:

6. **Attach Upper Guide Rail:** Flip the Upper Guide Rail (J) and snap it onto the two Wall Bracket Assemblies (I). Adjust the Anti-Fluctuator (F) to ensure the door panel closes properly, then tighten and fix it.
7. **Install Bottom Rail and Guide:** Place the Bottom Rail (B) at the bottom where the shower door will be installed. Position the Bottom Guide (A) in the center. Note: The Bottom Guide (A) has a small hook that needs to be stuck on the Bottom Rail (B). Mark and drill holes for the Bottom Guide (A) and secure it with wall anchors (aa) and (bb).
8. **Mount Outside Door Panel:** Remove parts of the Outside Roller (H), align them with the two holes of the Outside Door panel (C), and screw them on. Snap the two Outside Door panels (C) into the two grooves of the Bottom Guide (A).
9. **Mount Inside Door Panel:** Align the two Inside Rollers (K) with the upper holes above the Outside Door panel (C). Install the parts and adjust to the proper angle with a hex wrench. Install the Anti-Jump Assembly (G) in the lower hole.
10. **Install Handles:** Install the Handle (E) on the inner and outer sides of the door panels separately.
11. **Install Anti-Collision Rubber Strips:** Install Anti-collision rubber strips (D) on both sides of each Outside Door panel (C).
12. **Seal Edges:** Fix the edges of the Bottom Guide (A) and the Bottom Rail (B) with a solid adhesive. Apply sealant to the inside edges as well.


Allow 24 hours for the glue to solidify before using the shower.


Detailed installation guide for the Findepot Frameless Double Sliding Shower Door.

REVERSIBLEINSTALLATION

Reversible mounting

Designed and manufactured to meet the needs of left or right side mounting.



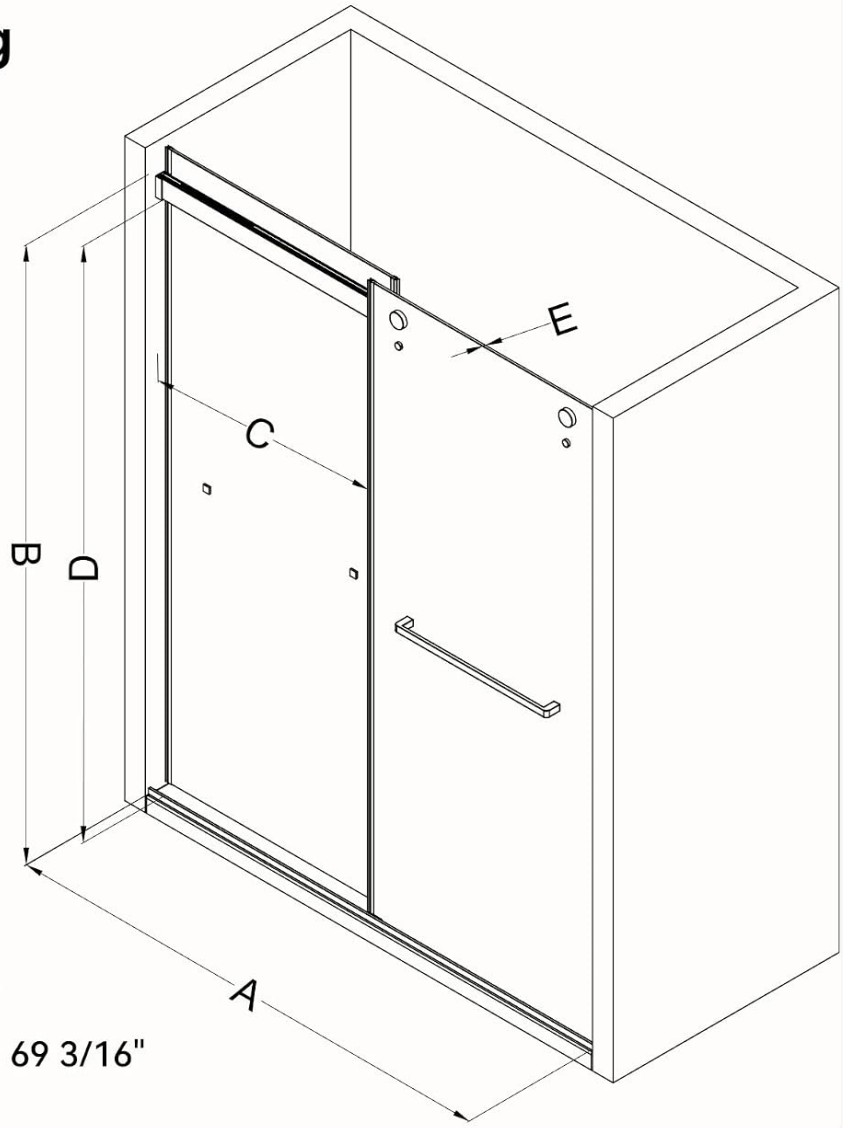

A: Shower Door Width: 55"-59"

B: Shower Door Height: 75"

C: Walk-In Width: 24 1/4"-28 1/4"

D: Walk Through Opening Height: 69 3/16"

E: Glass Thickness: 5/16"

Reversible mounting allows for left or right side installation.




Ensure your shower threshold meets the minimum width requirement of 2.76 inches (7cm).

Operating Instructions

Your Findepot shower door features a double sliding design and a silent soft-close system for a smooth and quiet experience.

- **Sliding Operation:** The door panels can slide to the right or the left, offering flexibility based on your preference and bathroom layout. Gently push or pull the handle to open or close the door.
- **Soft-Close Mechanism:** The silent buffer system ensures the door slides quietly and smoothly, preventing abrupt closures and enhancing your overall shower experience.

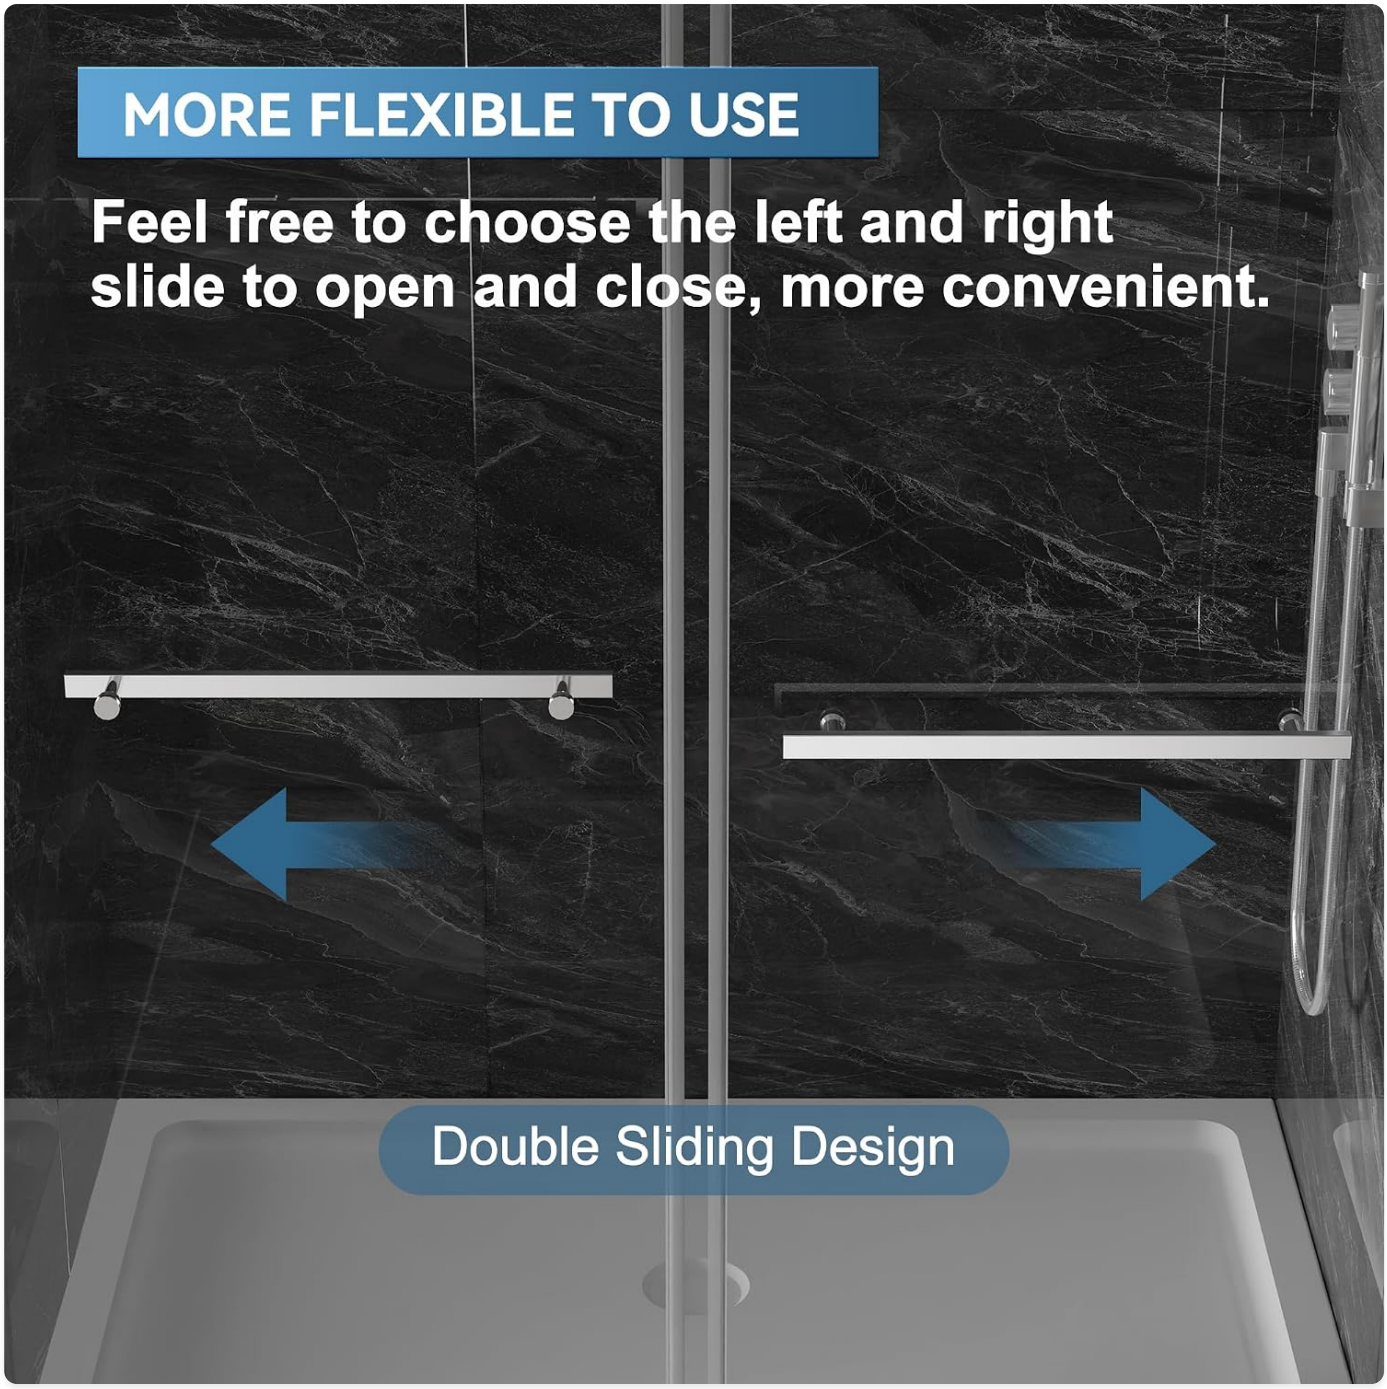

The double sliding design offers flexible opening from either side.



The silent soft-close system ensures gentle and quiet door closure.

Maintenance

Proper maintenance will ensure the longevity and appearance of your shower door.

- **Easy-Clean Coating:** The glass surface features an easy-clean coating that repels water stains and soap residue, simplifying cleaning.
- **Regular Cleaning:** Wipe down the glass panels and hardware regularly with a soft cloth and a mild, non-abrasive cleaner. Avoid harsh chemicals or abrasive tools that could damage the finish or coating.
- **Waterproof Design:** Equipped with bottom and side seal strips, this shower door effectively prevents water leakage. Periodically check these seals for wear and tear and replace if necessary to maintain water tightness.
- **Hardware Inspection:** Regularly inspect the stainless steel top guide bar, rollers, and other components for any signs of wear

or loosening. Tighten screws as needed to ensure smooth and quiet operation.



The easy-clean nano-coating minimizes water spots and soap residue.



The delicate waterproof groove design helps keep your bathroom floor dry.

Troubleshooting

If you encounter any issues with your shower door, please refer to the common problems and solutions below. If the problem persists, contact customer support.

Problem	Possible Cause	Solution
Door does not slide smoothly.	Rollers are dirty or misaligned; debris in the track.	Clean rollers and track. Check for proper alignment of rollers and adjust if necessary.

Problem	Possible Cause	Solution
Water leaks from the bottom or sides.	Seal strips are damaged or improperly installed; sealant not fully cured.	Inspect and replace damaged seal strips. Ensure proper application and curing of sealant.
Door does not close completely.	Anti-Fluctuator is not correctly adjusted.	Adjust the Anti-Fluctuator (F) position on the Upper Guide Rail (J) to allow full closure.
Glass appears cloudy or stained.	Hard water stains or soap scum buildup.	Clean with a mild glass cleaner. For stubborn stains, use a specialized cleaner for tempered glass. Regular cleaning is recommended.


Specifications

- **Brand:** Findepot
- **Model Number:** SD4-BN5975
- **Dimensions:** 56"-60" W x 75" H
- **Glass Thickness:** 5/16" (8mm)
- **Glass Type:** Clear Tempered Glass (ANSI-certified, with explosion-proof film)
- **Material:** Tempered Glass, Stainless Steel (hardware)
- **Finish:** Brushed Nickel
- **Style:** Modern
- **Item Weight:** 146 Pounds
- **Features:** Double Sliding, Silent Soft-Close Design, Easy-Clean Coating, Reversible Installation
- **Included Components:** Anti-Splash Guard, Guide Block, Anti-Fluctuator, Rollers, Guide Rail Brackets, Anti-Water Strips, Upper Guide Rail, Bumper Strip, Door Glass, Glass Brackets, Stationary Glass, Wall Jamb, Roller Guards, Handle.

Warranty and Support

Findepot is committed to providing high-quality products and customer satisfaction.

- **Return Policy:** Enjoy a 30-day no-questions-asked return policy.
- **After-Sales Support:** We offer dedicated lifetime after-sales support for your product.
- **Contact Us:** For any questions, assistance, or support, please contact us atAfter-sale-service-QA@outlook.com. We aim to reply within 24 hours.

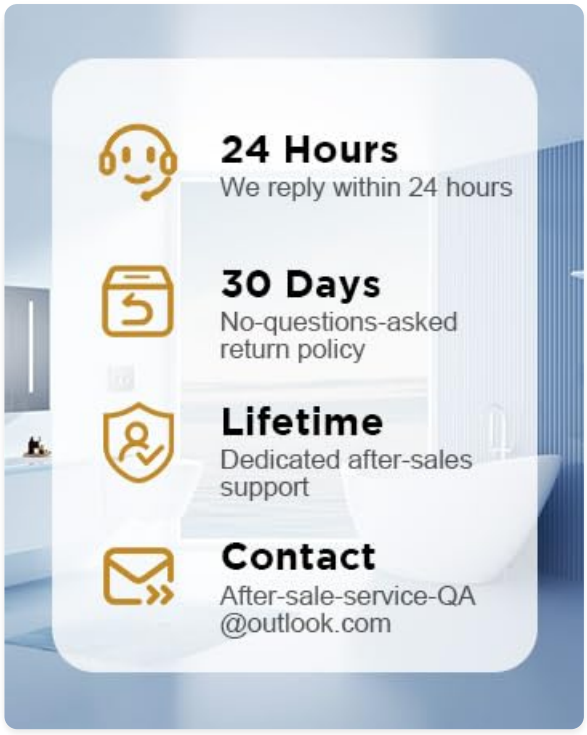

Findepot offers comprehensive customer support and warranty information.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question