

Corbero ONEGA675W

Corbero ONEGA675W 60 cm Wall-Mounted Extractor Hood User Manual

Model: ONEGA675W

[Introduction](#)

[Safety Information](#)

[Product Components](#)

[Installation](#)

[Operation](#)

[Maintenance](#)

[Troubleshooting](#)

[Specifications](#)

[Warranty & Support](#)

1. INTRODUCTION

Thank you for choosing the Corbero ONEGA675W 60 cm Wall-Mounted Extractor Hood. This appliance is designed to effectively remove smoke, steam, and odors from your kitchen, ensuring a fresh and clean cooking environment. Please read this manual carefully before installation and use to ensure proper operation and safety. Keep this manual for future reference.



Image 1.1: Corbero ONEGA675W Extractor Hood installed in a modern kitchen setting. This image shows the front view of the hood, highlighting its sleek design and integration above a cooking hob.

2. SAFETY INFORMATION

Important Safety Instructions: Read and follow all instructions before using this appliance to prevent fire, electric shock, personal injury, or damage.

- Ensure the electrical installation complies with local regulations.
- This appliance is for domestic use only. Do not use it for commercial purposes.
- Always disconnect the appliance from the power supply before cleaning or maintenance.
- Do not flambé under the range hood.
- Regularly clean grease filters to prevent fire hazards.
- Ensure adequate ventilation in the room when the range hood is used simultaneously with gas or other


fuel-burning appliances.

- Do not allow children to operate the appliance.
- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent, or similarly qualified persons to avoid a hazard.

3. PRODUCT OVERVIEW & COMPONENTS

The Corbero ONEGA675W extractor hood features a sleek design with tempered glass and touch controls. Key components include:

- **Main Body:** Tempered glass and white finish.
- **Control Panel:** Touch-sensitive controls for speed and lighting.
- **LED Lighting:** Illuminates the cooking area.
- **Aluminum Grease Filters:** Three-layer filters to capture grease.
- **Carbon Filter:** For recirculation mode (included).
- **Motor:** 230W motor with 4 speed settings.

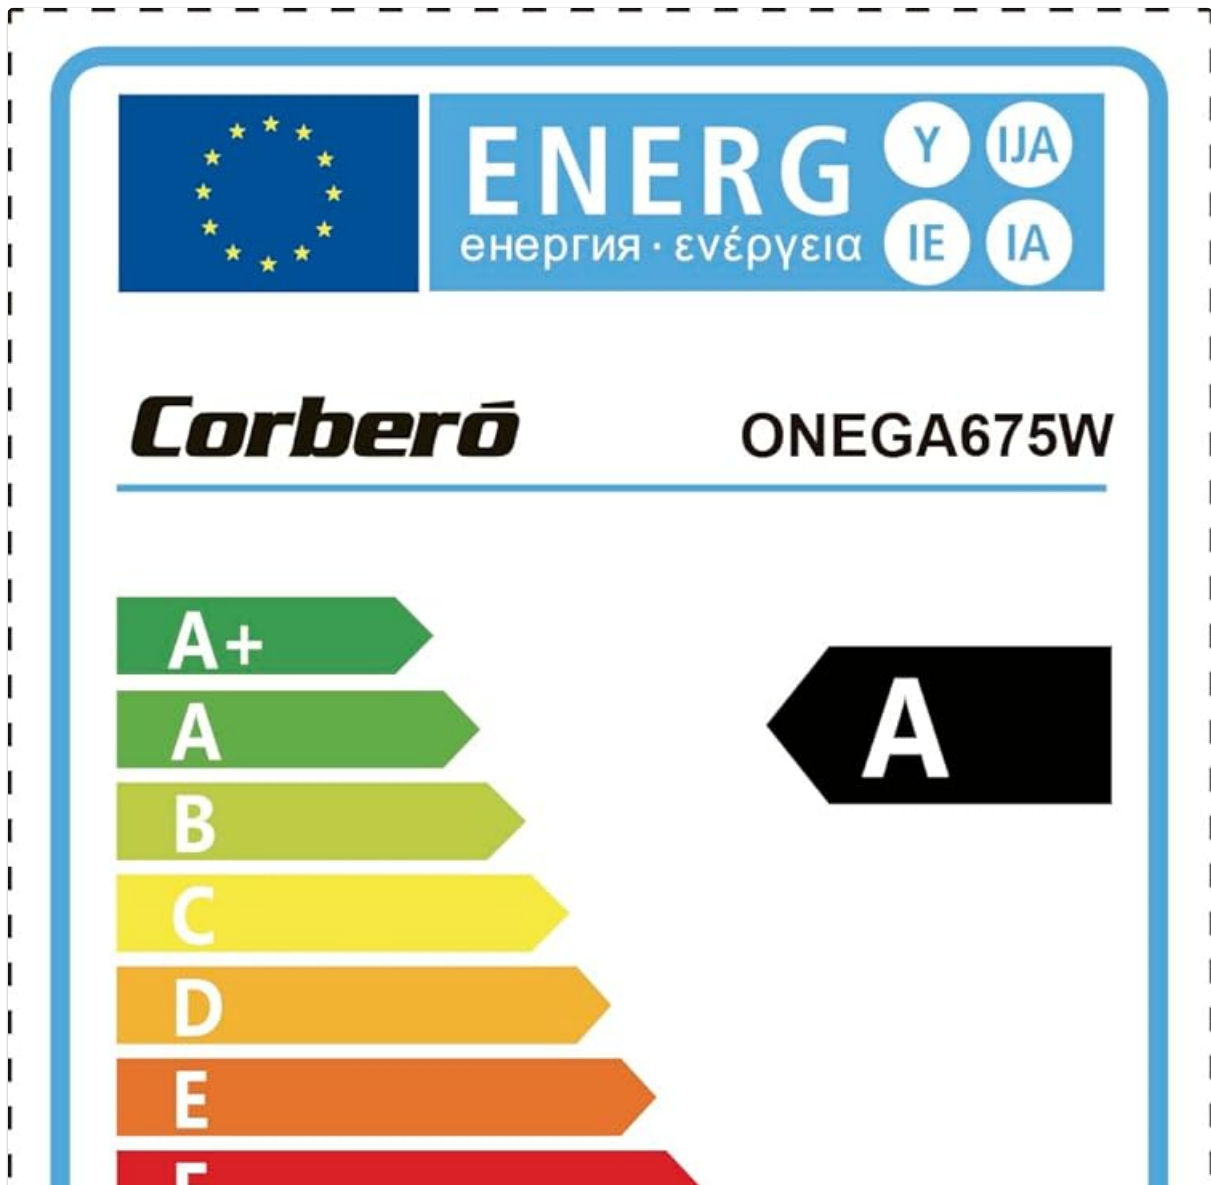

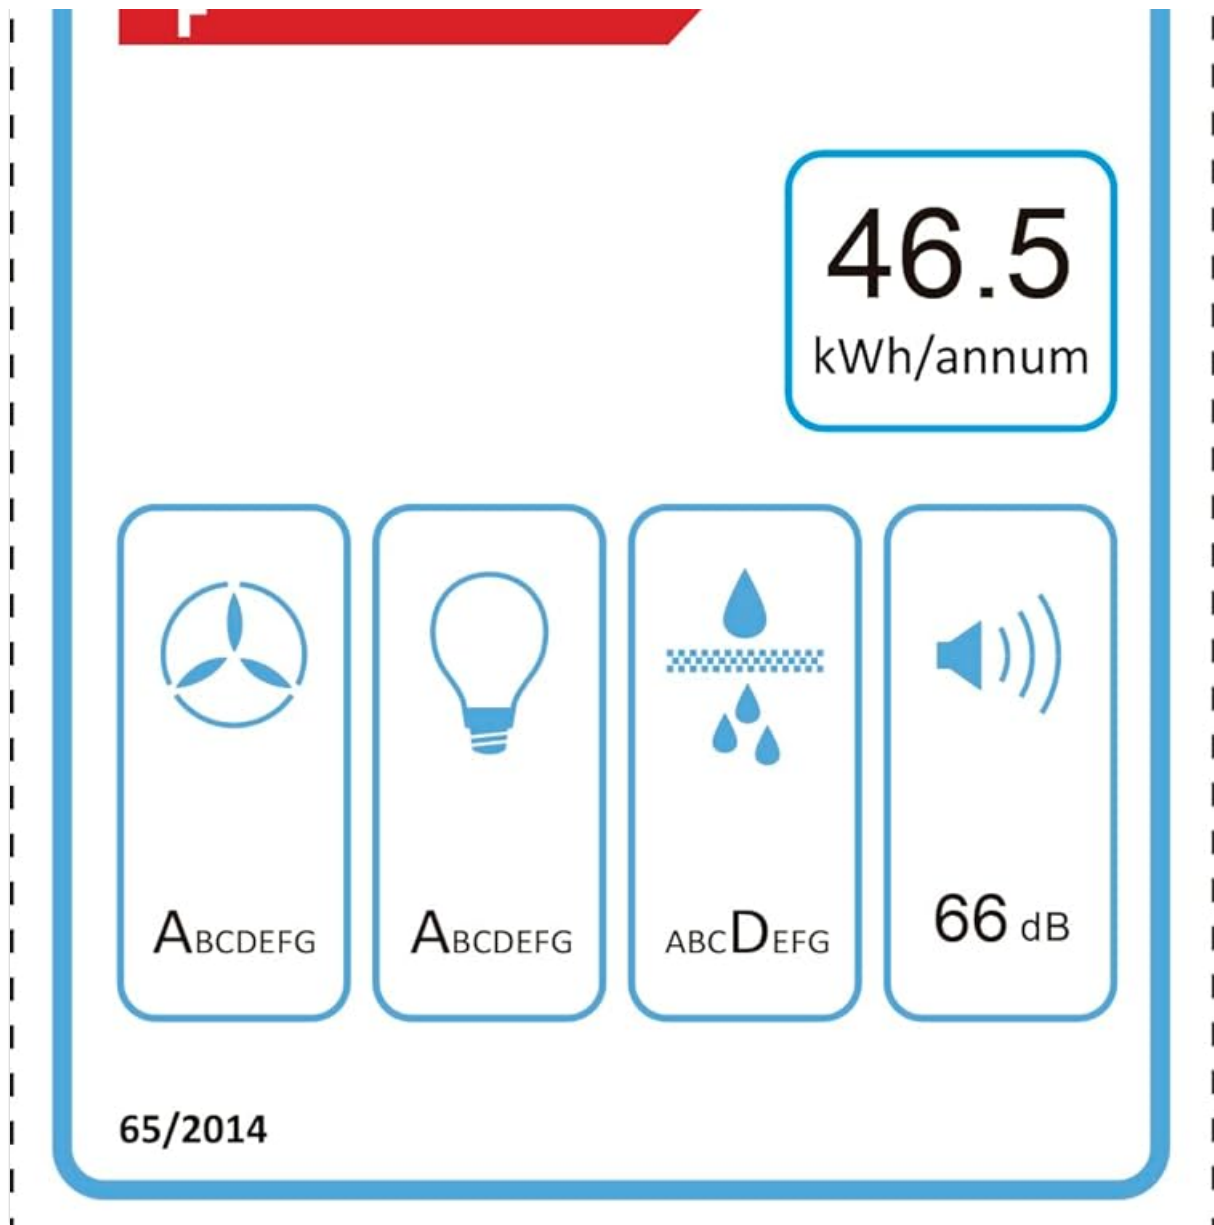


Image 3.1: Detail of the touch control panel and integrated LED lights. This image highlights the user interface for operating the hood's functions.



Image 3.2: View of the aluminum grease filter. This shows the removable filter designed to capture cooking grease.

4. INSTALLATION

Installation should be performed by a qualified technician. Ensure the power supply is disconnected before starting. The hood can be installed in extraction mode (ducted outside) or recirculation mode (filtered air returned to the kitchen).

4.1. Mounting the Hood

1. **Determine Mounting Height:** The recommended distance between the cooking surface and the lower edge of the hood is typically 65-75 cm for electric hobs and 70-80 cm for gas hobs. Refer to local regulations.
2. **Mark Drilling Points:** Use the provided template (if available) or measure carefully to mark the drilling points for the mounting brackets on the wall.

3. **Drill Holes and Insert Wall Plugs:** Drill holes of appropriate size and insert wall plugs suitable for your wall type.
4. **Secure Mounting Brackets:** Attach the mounting brackets to the wall using screws.
5. **Hang the Hood:** Carefully lift the hood and hang it onto the secured mounting brackets. Ensure it is level and stable.

4.2. Ducting (Extraction Mode)

- Connect a suitable ducting pipe (not supplied) to the air outlet of the hood.
- Route the ducting to an external vent, ensuring minimal bends for optimal airflow.
- Seal all connections to prevent air leaks.

4.3. Recirculation (Filter Mode)

- Install the carbon filter (supplied) according to the instructions in the maintenance section.
- No external ducting is required, as the filtered air is returned to the kitchen.

4.4. Electrical Connection

- Connect the hood to a grounded electrical outlet (220-240V, 50Hz).
- Ensure the power cord is not pinched or damaged.

- Color Vidrio Templado
- Filtro Aluminio 3 Capas
- Filtro Carbon

Corbero



Image 4.1: Side view of the extractor hood. This image helps visualize the depth and profile of the appliance for installation planning.

5. OPERATION


The Corbero ONEGA675W features intuitive touch controls for easy operation.

5.1. Control Panel Functions



Corberō

ONEGA675W

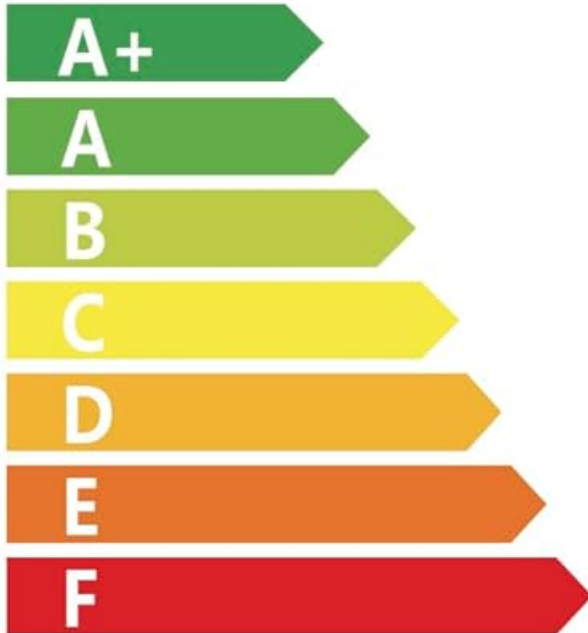

A

46.5
kWh/annum

A circular icon containing three stylized leaves or petals. Below the icon is the text "ABCDEFG".

An icon of a light bulb. Below the icon is the text "ABCDEFG".

An icon showing a water drop falling from a textured surface, with two more drops below. Below the icon is the text "ABCDEF".

An icon of a speaker with sound waves. Below the icon is the text "66 dB".

Image 5.1: Detailed view of the touch control interface. This image illustrates the various touch buttons for controlling the hood's functions.

- **Power Button ():** Press to turn the hood ON or OFF.
- **Speed Selection (▲ / ▼):** Use the '+' and '-' buttons to cycle through the 4 fan speeds (1, 2, 3, 4). Select a higher speed for more intense cooking.
- **Light Button ():** Press to turn the LED lights ON or OFF.
- **Timer Function (if available):** Some models may have a timer button to set a delayed shutdown. Consult your specific model's features.

5.2. General Usage Tips

- Turn on the hood a few minutes before you start cooking to create an airflow.
- Allow the hood to run for 5-10 minutes after cooking to clear any remaining odors and steam.
- Use the appropriate fan speed for the amount of smoke and steam generated.

6. MAINTENANCE

Regular maintenance ensures optimal performance and extends the lifespan of your extractor hood. Always disconnect power before maintenance.

6.1. Cleaning the Aluminum Grease Filters

The aluminum grease filters should be cleaned regularly (approximately every 2-4 weeks, depending on usage).

1. **Remove Filters:** Locate the release latches on the filters and push them to detach the filters from the hood.
2. **Clean Filters:** Wash the filters by hand in warm soapy water or in a dishwasher (ensure no other items are washed simultaneously to avoid food residue transfer).
3. **Dry and Reinstall:** Allow filters to dry completely before reinstalling them.



Corbero

- Campana Decorativa Pared Cristal
- 705,2 m³/h caudal de extracción
- Color blanco

Image 6.1: Close-up of the aluminum grease filter, illustrating its design for easy removal and cleaning.

6.2. Replacing the Carbon Filter (Recirculation Mode)

If your hood is used in recirculation mode, the carbon filter needs to be replaced every 3-6 months, depending on usage.

1. **Remove Grease Filters:** First, remove the aluminum grease filters as described above.
2. **Remove Old Carbon Filter:** The carbon filter is usually attached to the motor housing. Twist or unclip it to remove.
3. **Install New Carbon Filter:** Attach the new carbon filter, ensuring it is securely in place.
4. **Reinstall Grease Filters:** Place the aluminum grease filters back into position.

6.3. Cleaning the Exterior

- Wipe the exterior surfaces with a soft cloth dampened with mild detergent.
- Do not use abrasive cleaners, corrosive detergents, or harsh brushes, as these can damage the tempered glass and finish.
- Dry thoroughly with a clean, soft cloth.

7. TROUBLESHOOTING

Before contacting customer support, please check the following common issues and solutions:

Problem	Possible Cause	Solution
Hood does not turn on.	No power supply.	Check if the power cord is properly plugged in and the circuit breaker is ON.
Low suction power.	Clogged grease filters or carbon filters (recirculation mode).	Clean or replace filters as per maintenance instructions. Ensure ducting is not blocked.
Excessive noise.	Loose components, improper installation, or blocked ducting.	Check for loose screws or parts. Ensure ducting is clear and properly installed.
Lights not working.	Faulty LED bulb or electrical connection.	Contact customer support for bulb replacement or electrical inspection.

8. TECHNICAL SPECIFICATIONS

Feature	Specification
Model Number	ONEGA675W
Brand	Corbero
Type	Wall-Mounted Extractor Hood
Color	White
Material	Tempered Glass
Dimensions (D x W x H)	39.5 cm x 60 cm x 31 cm
Airflow Capacity	705.2 m ³ /h
Noise Level	66 dB
Motor Power	230W
Speed Settings	4 Speeds
Control Type	Touch Control
Filters	1 Aluminum Filter (3 layers) + 1 Carbon Filter

Feature	Specification
Energy Efficiency Class	A
Voltage	220-240V
Frequency	50Hz
Weight	13.5 kg

Note: Specifications are subject to change without prior notice. Please refer to the product label for the most accurate information.

9. WARRANTY & CUSTOMER SUPPORT

9.1. Warranty Information

This Corbero appliance comes with a manufacturer's warranty of **two years** from the date of purchase. The warranty covers defects in materials and workmanship under normal use. It does not cover damage caused by improper installation, misuse, neglect, or unauthorized repairs.

Please retain your proof of purchase for warranty claims.

9.2. Customer Support

For technical assistance, spare parts, or warranty claims, please contact Corbero customer service. Our team of experts is ready to help you and provide the best attention.



Image 9.1: Corbero Technical Service information. This image emphasizes the availability of expert support for customers.

You can find contact details on the official Corbero website or your purchase documentation.

