

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [X-Sense](#) /

› [X-Sense Remote Controller RC01 Pro User Manual](#)

## X-Sense RC01 Pro

# X-Sense Remote Controller RC01 Pro User Manual

Model: RC01 Pro | Brand: X-Sense

## INTRODUCTION

---

The X-Sense Remote Controller RC01 Pro is designed to provide convenient control over your X-Sense Link+ wireless interconnected smoke and carbon monoxide detectors. This remote allows for easy testing and silencing of alarms without the need to physically reach each unit, enhancing safety and user convenience, especially for units installed in high or hard-to-reach locations.

## SAFETY INFORMATION

---

- Always ensure the remote controller is used within the specified operating range of your X-Sense Link+ alarms.
- Do not expose the remote controller to extreme temperatures, humidity, or direct sunlight.
- Keep out of reach of children.
- Only use the specified battery type for replacement.
- Do not attempt to disassemble or repair the unit yourself. Refer to qualified personnel for service.

## PRODUCT OVERVIEW

---

The RC01 Pro remote controller features a simple, compact design for ease of use. It includes a single large button for all primary functions and an LED indicator for status feedback.

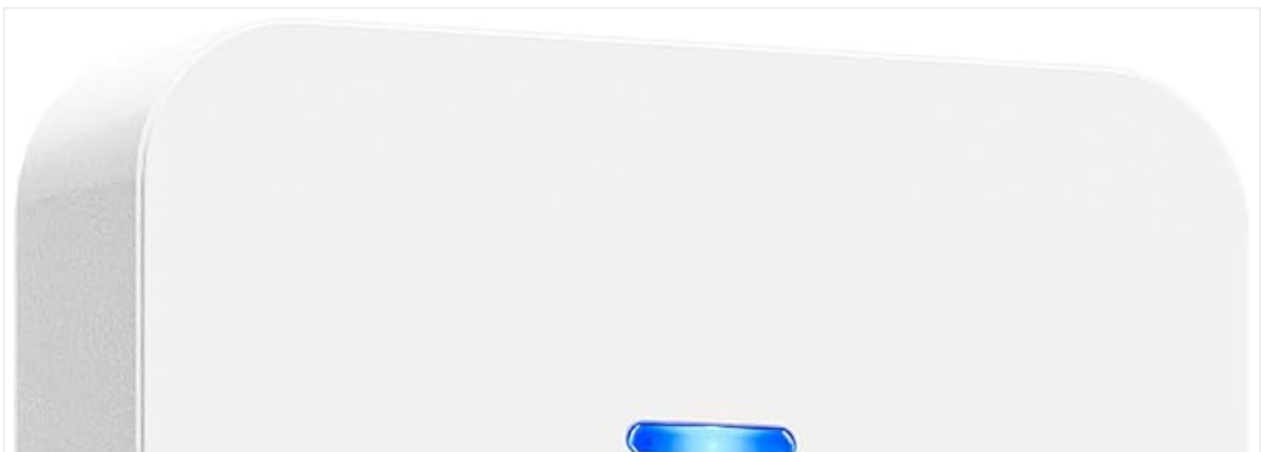




Figure 1: Front view of the X-Sense Remote Controller RC01 Pro, showing the large 'TEST/MUTE' button and LED indicator.

## Compact Design

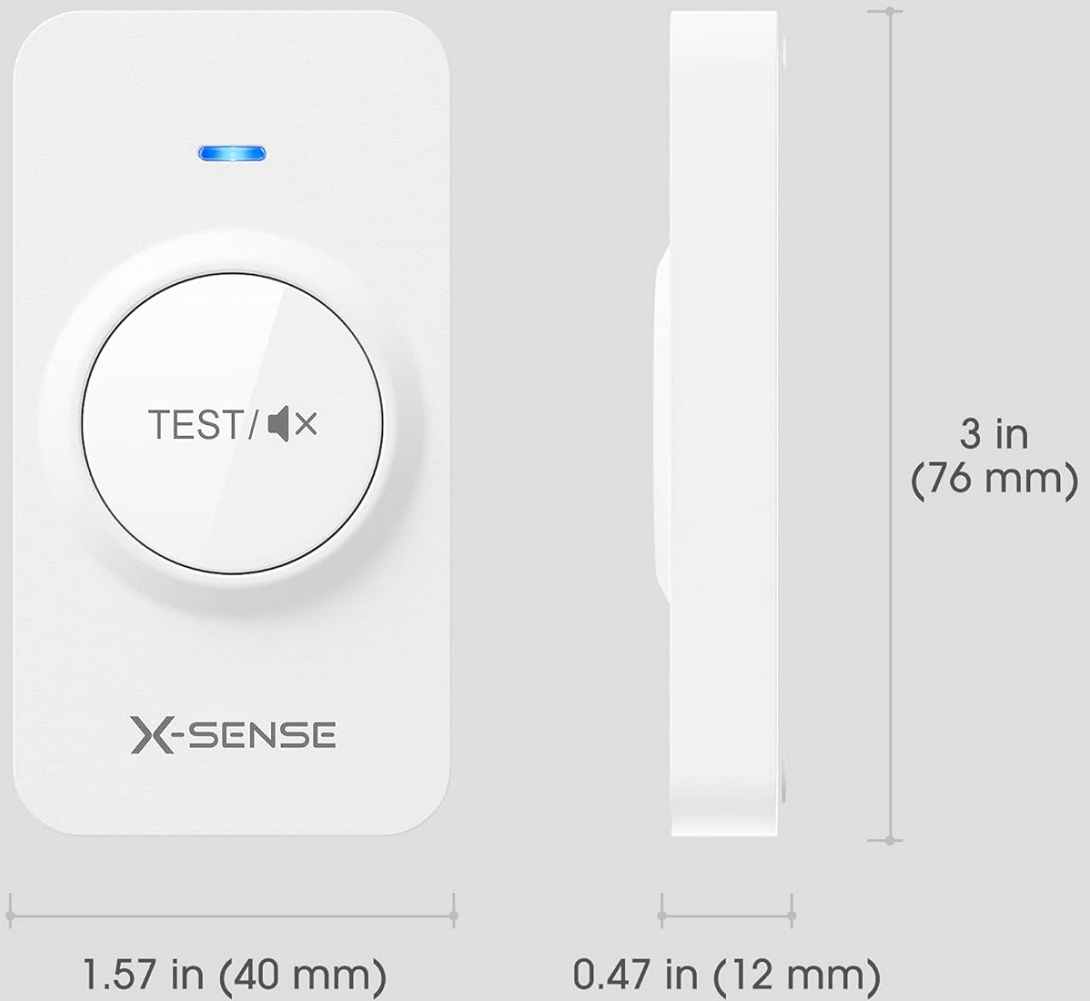


Figure 2: Dimensions of the X-Sense Remote Controller RC01 Pro, illustrating its compact size (3 inches H x 1.57 inches W x 0.47 inches D).

## SETUP

---

### 1. Battery Installation

The remote controller comes with a pre-installed lithium battery. Before first use, you need to remove the insulating film.

1. Pry open the rear cover by inserting the included key into the slot at the bottom of the remote controller's backside.
2. Peel off the insulating film on the button cell. Ensure the correct polarity of the battery and close the cover.

# Replaceable Lithium Battery

Environmentally friendly and easy to replace

REMOVE  
BEFORE  
USE

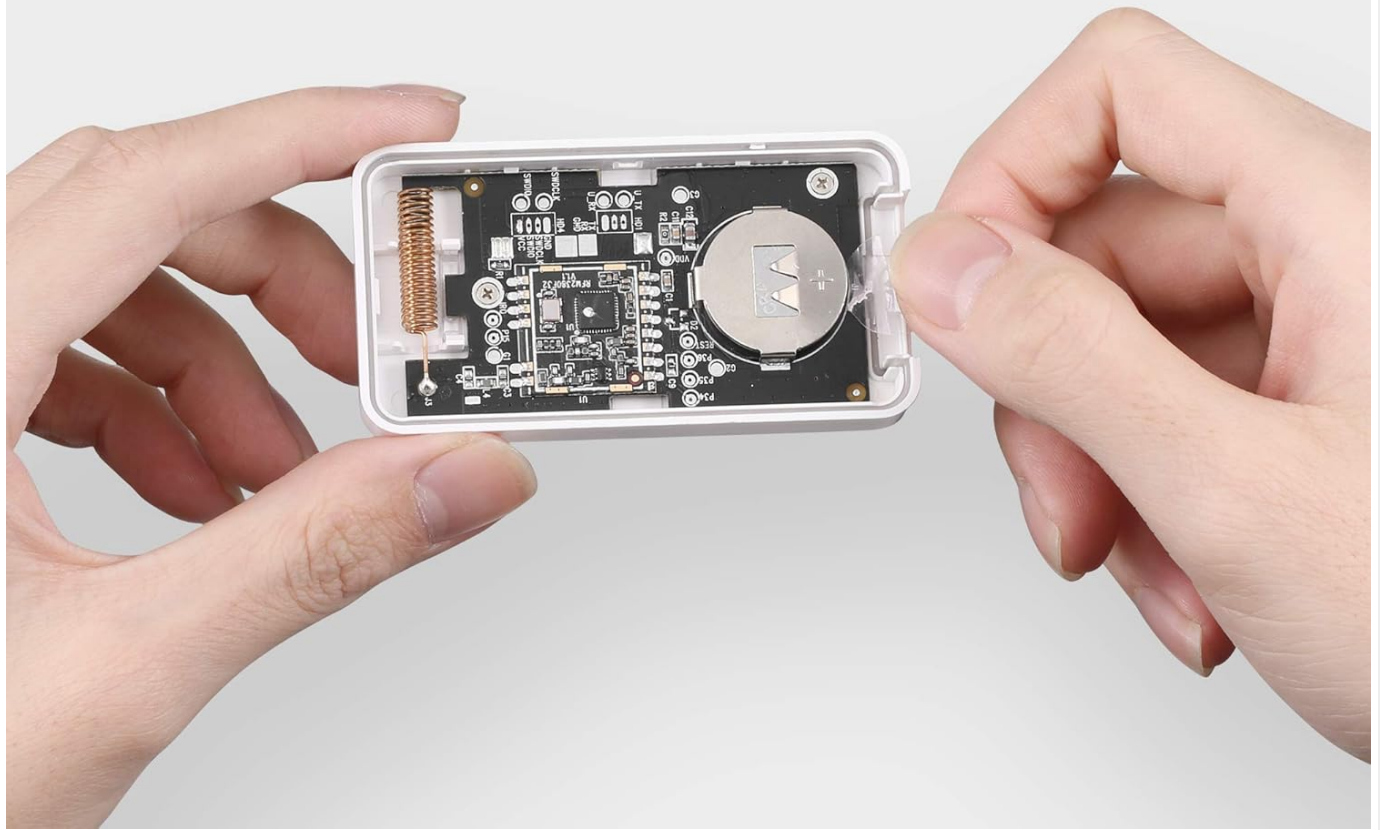


Figure 3: Illustration of removing the insulating film from the battery compartment of the remote controller.

For a visual guide on battery installation and pairing, please refer to the official product video below:

Your browser does not support the video tag.

Video 1: Official X-Sense video demonstrating battery installation and pairing of the RC01 Remote Controller with X-Sense smoke alarms.

## 2. Pairing with X-Sense Link+ Alarms

The remote controller needs to be paired with your X-Sense Link+ wireless interconnected smoke or carbon monoxide detectors to function.

1. Ensure the insulating film has been removed from the battery as described above.
2. Press the test/silence button on the remote controller 4 times consecutively to enter pairing mode. The LED indicator on the remote controller will flash continuously.
3. Once pairing is successful, the LED indicator will light up and then go out in about 3 seconds.

# Easy to Pair

Simply press the test/silence button to pair with interlinked alarms.



Figure 4: Diagram showing the X-Sense Remote Controller pairing with a network of interlinked smoke alarms.

## OPERATING INSTRUCTIONS

---

### 1. Testing Alarms

To test all interconnected smoke alarms, simply press the test/silence button on the remote controller once. All paired alarms will sound, confirming their operational status.

# Remote Test and Silence Function

Convenient control without the need for ladders or sticks



Figure 5: A user demonstrating the remote test function of the X-Sense Remote Controller in a kitchen setting.

## 2. Silencing Alarms

The remote controller provides a convenient way to silence false alarms without needing to reach the alarm unit directly.

- If an alarm is triggered, press the test/silence button on the remote controller once. All interlinked smoke alarms, except the alarm that detected the smoke (the source alarm), will be silenced. This allows you to quickly locate the source of the alarm.
- To silence the source alarm, press the test/silence button again.

# Quickly Locate the Source Alarm

Press the test/silence button once to silence every alarm except the source alarm. Press it again to silence the source alarm.



Figure 6: Step-by-step visual guide on how to quickly locate and silence the source alarm using the remote controller.

## MAINTENANCE

### Battery Replacement

The RC01 Pro remote controller uses a replaceable lithium button cell battery (CR2032). The battery is designed to support 1-year continuous use.

1. When the battery is low, the LED indicator on the remote controller may flash intermittently or the remote may become unresponsive.
2. Pry open the rear cover using the included key or a similar tool.
3. Remove the old battery and insert a new CR2032 lithium battery, ensuring correct polarity (+ side up).
4. Close the rear cover securely.

Dispose of old batteries according to local regulations.

## TROUBLESHOOTING

---

Problem	Possible Cause	Solution
Remote not responding.	Low or dead battery.	Replace the battery (CR2032).
Remote not pairing with alarms.	Incorrect pairing procedure; Alarms out of range.	Ensure you press the button 4 times quickly. Move closer to the alarms during pairing. Refer to the pairing section.
Alarms not silencing.	Remote not paired; Source alarm not silenced yet.	Ensure remote is paired. Press the button once to silence all but the source, then again to silence the source.

## SPECIFICATIONS

---

**Model:** RC01 Pro

**Brand:** X-Sense

**Power Source:** Battery Powered

**Battery Type:** 1 x CR2032 Lithium Metal battery (included)

**Color:** White

**Product Dimensions:** 0.47"D x 1.57"W x 3"H (12 mm D x 40 mm W x 76 mm H)

**Item Weight:** 0.05 Kilograms (1.76 ounces)

**Sensor Type:** Silence or Test X-Sense Link+ Alarm

**Alarm Type:** Audible (controlled via remote)

## WARRANTY AND SUPPORT

---

X-Sense provides comprehensive customer support for the RC01 Pro remote controller.

- **Money-Back Guarantee:** 60-day money-back guarantee.
- **Warranty:** 2-year warranty from the date of purchase.
- **Customer Support:** Lifetime customer support with a response time of 24 hours.

For further assistance, please visit the official X-Sense website or contact their customer service team.

