

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

> [APPASO](#) /

> [APPASO APS3004BTG Gold Kitchen Faucet with Water Filter - Instruction Manual](#)

## APPASO APS3004BTG

# APPASO APS3004BTG Gold Kitchen Faucet with Water Filter

Instruction Manual

Model: APS3004BTG | Brand: APPASO

## INTRODUCTION

Thank you for choosing the APPASO APS3004BTG Gold Kitchen Faucet. This 3-in-1 multifunctional faucet combines hot and cold water delivery with a dedicated connection for a water filtration system (sold separately). It features a high-arch design, a pull-down sprayer with multiple functions, and durable stainless steel construction. This manual provides essential information for safe installation, proper operation, routine maintenance, and troubleshooting to ensure optimal performance and longevity of your faucet.



Figure 1: APPASO APS3004BTG Gold Kitchen Faucet

## SETUP AND INSTALLATION

Before beginning installation, ensure you have all necessary tools and components. Turn off the main water supply to your kitchen sink. Review the following steps carefully.

### 1. Package Contents



Figure 2: Included Components

Verify all parts are present before proceeding. Refer to the included parts list in your physical manual for detailed identification.

## 2. Countertop and Hole Requirements

- **Countertop Thickness:** Maximum 4cm (1-3/5 inches), Minimum 1.2cm (0.5 inches).
- **Mounting Hole Size:** 3.2-3.5cm (1-1/5 to 1-1/2 inches).
- This faucet is designed for single-hole installation but includes a 10-inch deck plate for 1-hole to 3-hole sink configurations.

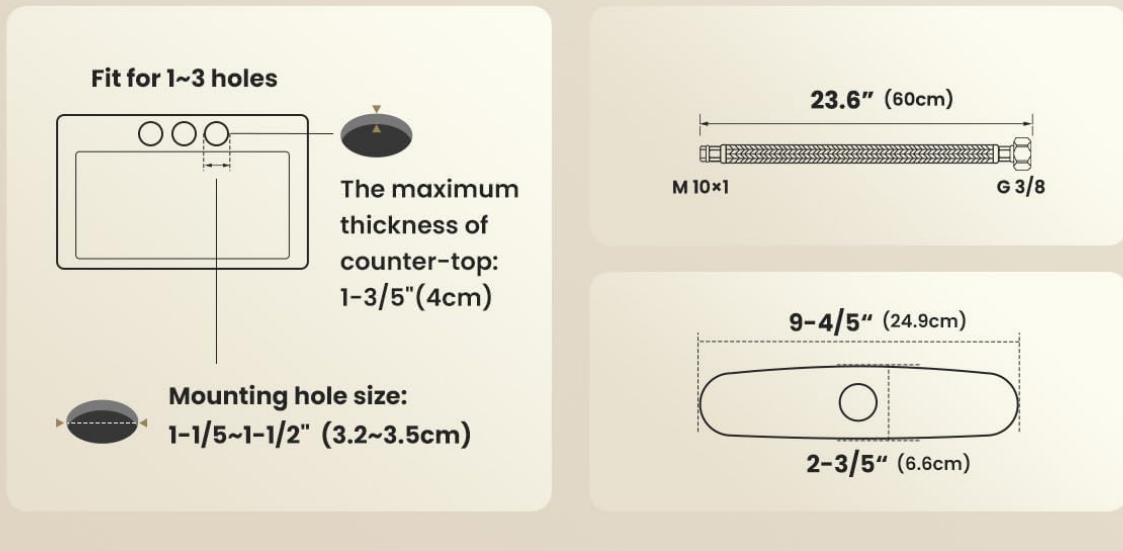


Figure 3: Faucet Dimensions and Mounting Requirements

### 3. Installation Steps

Follow these steps for proper installation. For a visual guide, refer to the installation video below.

1. Insert the faucet body into the mounting hole on the countertop. If converting a 3-hole sink, place the deck plate first.
2. From underneath the sink, secure the faucet using the provided mounting hardware (washer and nut). Tighten firmly to prevent movement.
3. Connect the hot and cold water supply lines to your angle stops. The red marked hose is for hot water, and the blue marked hose is for cold water.
4. Connect the dedicated water filter line to your under-counter water filtration system (not included). The faucet provides a 1/4 inch OD and 3/8 inch OD option for connection.

5. Attach the pull-down sprayer hose to the quick-connect fitting under the faucet. Ensure a secure connection.
6. Install the counterweight onto the pull-down hose, typically 6-8 inches from the quick-connect fitting, to ensure proper retraction of the sprayer.
7. Once all connections are secure, slowly turn on the main water supply and check for leaks.

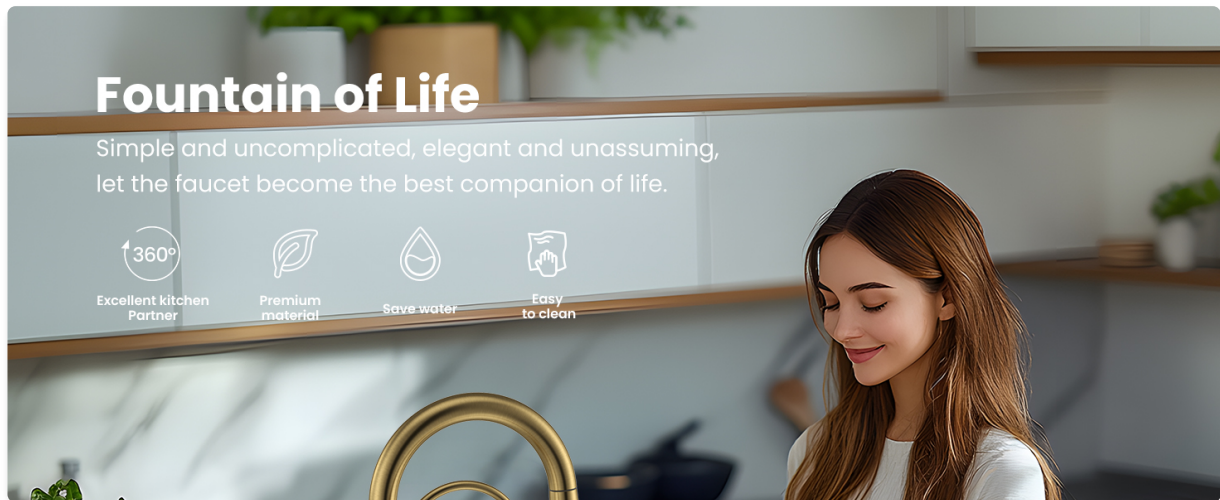


Figure 4: Water Line Connection Diagram



Figure 5: Installation Schematic Under Countertop

## Installation Video Guide

Your browser does not support the video tag.

Video 1: APPASO Kitchen Faucet Installation Guide. This video demonstrates the step-by-step process of installing the APPASO kitchen faucet, including securing it to the countertop and connecting the water lines.

## OPERATING INSTRUCTIONS

Your APPASO faucet offers versatile functionality for various kitchen tasks.

### 1. Hot and Cold Water Control

The main handle controls the flow and temperature of the hot and cold water. Move the handle left for hot water, right for cold water, and adjust vertically for flow intensity.

### 2. Filtered Water Dispenser

The smaller, dedicated handle on the left side of the faucet activates the filtered water flow. This requires connection to an external water filtration system (not included).



## APPASO Kitchen Faucet Brings You Peace of Mind

Water for the whole family is vital

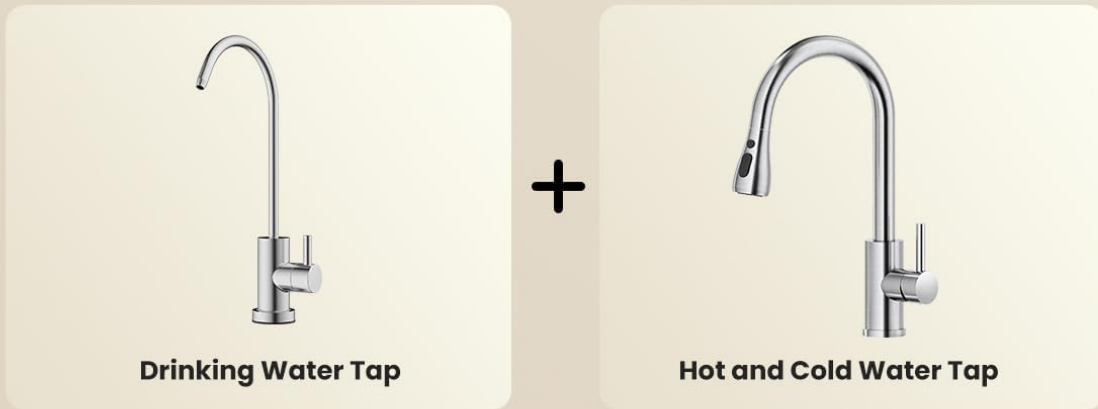


Figure 6: 3-in-1 Faucet Functionality

### 3. Pull-Down Sprayer Functions

The pull-down sprayer offers three distinct modes, selectable via buttons on the spray head:

- **Stream Mode:** For filling pots and general use.
- **Spray Mode:** For rinsing dishes and wider coverage.
- **Double Broom Mode:** A powerful, concentrated spray for stubborn cleaning.
- **Pause Mode:** Temporarily stops water flow without turning off the main handle.

# Three Types of Splash

Stream or spray? Our faucet gives you both at the flick of a switch!



**Stream**



**Spray**



**Double Broom**

Figure 7: Sprayer Modes (Stream, Spray, Double Broom)

# No Need to Hold The Pot

360 ° free rotation with 20" pull-out, cleaning a wider range of dead-end stains rinsing effortless



Figure 8: Pull-Down Sprayer with 20-inch Reach and 360-degree Swivel

## Product Functionality Video

Your browser does not support the video tag.

Video 2: Gold Kitchen Faucet with Water Filter. This short video demonstrates the faucet's general operation and water flow.

## MAINTENANCE

Regular maintenance will help preserve the appearance and functionality of your APPASO faucet.

### 1. Cleaning the Faucet

- Clean the faucet regularly with a soft cloth and mild soap. Avoid abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the brushed gold finish.

- Rinse thoroughly with clean water and dry with a soft cloth to prevent water spots.

## 2. Aerator Maintenance

If water flow becomes restricted or irregular, the aerator may be clogged. Unscrew the aerator from the spray head, clean any debris or mineral deposits, and reattach it securely.

## 3. Ceramic Valve

The faucet is equipped with a stable ceramic valve designed for over 500,000 switches, ensuring long-term leak-free performance.



Figure 9: Durable SUS304 Stainless Steel and Ceramic Valve

Refer to the following table for common issues and their solutions.

Problem	Possible Cause	Solution
Low water flow (hot or cold)	Clogged aerator; partially closed shut-off valve; kinked supply line.	Clean the aerator. Ensure shut-off valves are fully open. Check supply lines for kinks.
Faucet leaks from base	Loose mounting nut; worn O-rings.	Tighten the mounting nut under the sink. If leaking persists, contact customer support for replacement O-rings.
Sprayer not retracting properly	Improperly positioned counterweight; obstruction under the sink.	Adjust the counterweight position on the hose. Clear any obstructions preventing hose movement.
Sprayer modes not changing	Debris in spray head buttons; internal malfunction.	Ensure buttons are free of debris. If issue persists, contact customer support.
Weak hot water flow specifically	Restriction in hot water supply line or valve.	Check hot water supply line for kinks or blockages. Ensure hot water shut-off valve is fully open. If problem continues, consult a plumber.

## SPECIFICATIONS

Feature	Detail
Model Name	APS3004BTG
Brand	APPASO
Material	SUS304 Stainless Steel
Finish Type	Brushed Gold
Mounting Type	Deck Mount
Hole Count	1 (with 10-inch deck plate for 1-3 hole installation)
Number of Handles	2 (Main handle for H/C, separate handle for filtered water)
Spout Design	High Arch Gooseneck, 360° Swivel
Sprayer Features	Pull-Down, 3-Function (Stream, Spray, Double Broom), Pause Mode
Pull-Down Hose Length	20 inches
Maximum Flow Rate (Regular)	1.8 Gallons Per Minute (GPM) @ 60 PSI
Maximum Flow Rate (Filter)	1.7 Gallons Per Minute (GPM) @ 60 PSI
Hot/Cold Water Line Connection	3/8 inches
Filter Water Supply Connection	1/4 inch OD and 3/8 inch OD options
Valve Type	Ceramic Disc Valve

Feature	Detail
Aerator	Germany Imported Neoperl Aerator (TPI: M24 x 1)
Product Dimensions	17"D x 3"W x 13"H
Item Weight	4.49 pounds (2.04 Kilograms)

## WARRANTY

---

APPASO products are manufactured to high-quality standards and are backed by a manufacturer's warranty. Please refer to the warranty card included with your product or visit the official APPASO website for detailed warranty terms and conditions. Keep your proof of purchase for warranty claims.

## CUSTOMER SUPPORT

---

If you have any questions, require assistance with installation, or encounter any issues not covered in this manual, please contact APPASO customer support. Contact information can typically be found on the product packaging, the official APPASO website, or through your retailer.