**Saved from manuals.plus.**
**Open the live page for links to other documents and user manuals.**



**DeLUX KM32-Black**

# DELUX TKL 68 Keys Wireless Mechanical Keyboard User Manual

Brand: DeLUX | Model: KM32-Black

## 1. Introduction

Thank you for choosing the DELUX TKL 68 Keys Wireless Mechanical Keyboard. This compact and versatile keyboard is designed for both Mac and Windows devices, offering dual connection modes (wired and Bluetooth 5.0), a long-lasting rechargeable battery, and vibrant RGB backlighting. This manual provides detailed instructions to help you get the most out of your new keyboard.

### Package Contents:

- 1 x DELUX KM32 Mechanical Keyboard
- 1 x Detachable Type-C Cable
- 1 x User Manual

## 2. Product Features

### 2.1. Compact 68-Key Layout

The TKL (Tenkeyless) 68-key design offers a compact form factor, freeing up desk space while remaining highly portable. Its dimensions are approximately 340(L) x 108(W) x 35(H) mm (13.39 x 4.25 x 1.38 inches).




Image: The DELUX TKL 68 Keys Mechanical Keyboard showcasing its compact size and dimensions.

## 2.2. Brown Mechanical Switches

Equipped with Brown Switches, this keyboard provides a soft rebound and a non-clicky tactile feel, ideal for both typing and gaming. The switches are rated for over 50 million keystrokes, ensuring long-term durability.




Image: A close-up view of the Brown mechanical switches with RGB backlighting.

## 2.3. Dual Connection Modes

The keyboard supports two connection types:

- **Wired Mode:** Connect via the detachable Type-C cable. This mode allows you to continue using the keyboard while it charges.
- **Wireless Bluetooth 5.0 Mode:** Enjoy stable wireless connectivity with up to 3 devices (Mac or Windows). Easily switch between connected devices.

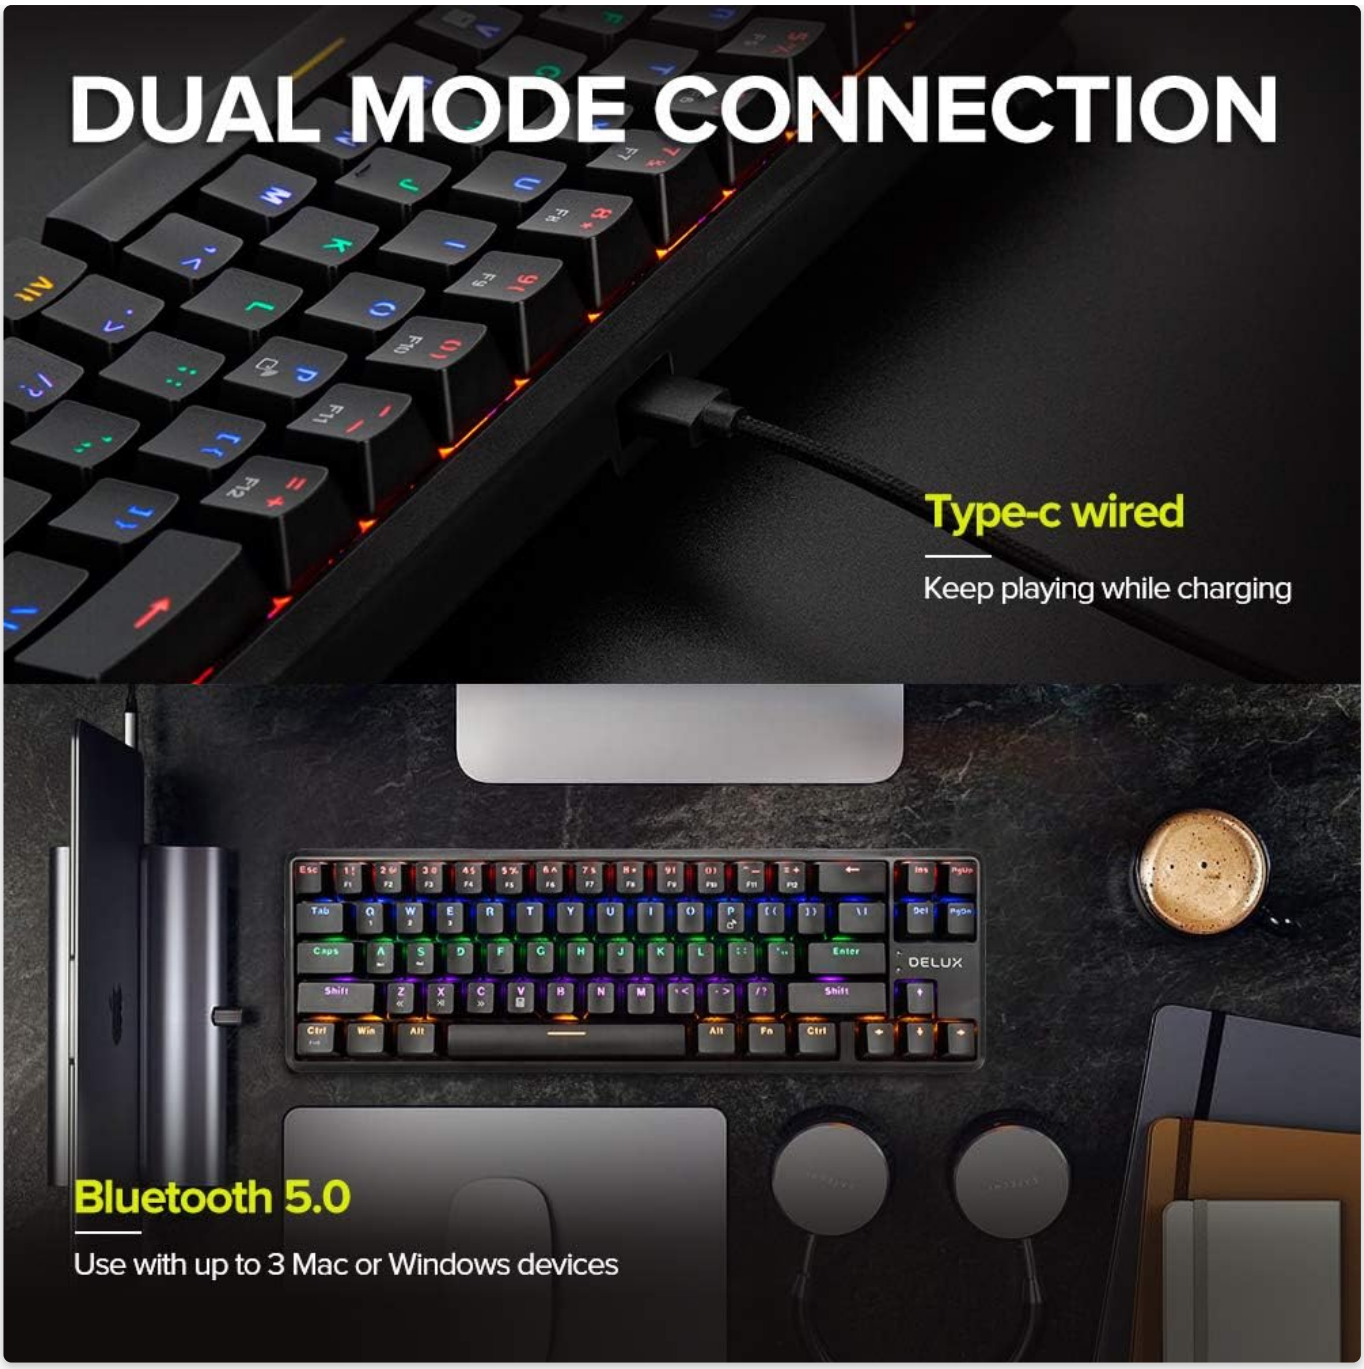


Image: The keyboard demonstrating both its wired Type-C connection and wireless Bluetooth 5.0 capability.

## 2.4. RGB Backlighting

The keyboard features vibrant RGB backlighting with 17 pre-set lighting effects available directly on board. You can customize lighting speed and brightness to suit your preference.




Image: The DELUX keyboard illuminated with its RGB backlighting effects.

## 2.5. Long-Lasting Rechargeable Battery

A built-in 2000 mAh lithium battery provides up to 12 hours of continuous use with backlighting enabled on a single charge. The keyboard includes a low battery alert design, where the indicator light turns red to remind you to charge.




Image: The keyboard highlighting its built-in rechargeable battery and low battery alert feature.

## 3. Setup

### 3.1. Charging the Keyboard

Before first use, or when the low battery indicator turns red, connect the keyboard to a USB power source using the provided Type-C cable. The indicator light will show charging status.

### 3.2. Connecting the Keyboard

#### Wired Connection:

1. Connect the detachable Type-C cable to the keyboard's Type-C port.
2. Connect the other end of the cable to an available USB port on your computer.
3. The keyboard will be automatically recognized and ready for use.

### Bluetooth 5.0 Wireless Connection:

1. Ensure the keyboard is sufficiently charged.
2. Turn on the keyboard's power switch (usually located on the back or side).
3. Activate Bluetooth on your device (computer, laptop, tablet).
4. On the keyboard, press and hold the Function (Fn) key along with one of the Bluetooth channel keys (e.g., Fn + Q, Fn + W, or Fn + E) to enter pairing mode. The indicator light will blink rapidly.
5. On your device, search for new Bluetooth devices and select "DELUX KM32" (or similar name) from the list.
6. Follow any on-screen prompts to complete the pairing process.
7. Once paired, the indicator light on the keyboard will stop blinking and remain solid.
8. To switch between paired devices, simply press Fn + Q, Fn + W, or Fn + E (short press) for the desired channel.

**Note: Bluetooth 5.0 mode is unavailable on Windows 7 or lower version systems. For Mac OS, the system version must be iOS 13 or above for full compatibility.**

## 4. Operating Instructions

### 4.1. RGB Backlight Control

The keyboard offers 17 different lighting effects. Use the following key combinations to control the backlight:

- **Change Lighting Effect:** Press `Fn` + `I` / `O` / `P` to cycle through the 17 available effects.
- **Adjust Lighting Speed:** Use `Fn` + `;` (decrease) or `Fn` + `'` (increase).
- **Adjust Brightness:** Use `Fn` + `.` (decrease) or `Fn` + `/` (increase).

### 4.2. Function Key Combinations

The keyboard utilizes the Function (Fn) key to access secondary functions printed on the keycaps. Refer to the keycap legends for specific combinations (e.g., Fn + F1-F12 for multimedia controls).

## 5. Maintenance

To ensure the longevity and optimal performance of your DELUX keyboard, follow these maintenance guidelines:

- **Cleaning:** Regularly clean the keyboard with a soft, dry cloth. For deeper cleaning, use compressed air to remove dust and debris from between the keycaps. You may use a keycap puller (not included) to remove keycaps for thorough cleaning of the switches.
- **Avoid Liquids:** Do not expose the keyboard to liquids. In case of accidental spills, immediately disconnect the keyboard and allow it to dry completely before reconnecting.
- **Storage:** Store the keyboard in a cool, dry place away from direct sunlight and extreme temperatures.
- **Cable Care:** Handle the detachable Type-C cable with care. Avoid bending or twisting it excessively to prevent damage.

## 6. Troubleshooting

### 6.1. Keyboard Not Responding

- **Wired Mode:** Ensure the Type-C cable is securely connected to both the keyboard and your computer. Try a different USB port or cable.

- **Wireless Mode:** Check if the keyboard is powered on. Ensure the battery is charged. Re-pair the keyboard with your device. Try switching to a different Bluetooth channel (Fn + Q/W/E).

### 6.2. Bluetooth Connection Issues

- Ensure Bluetooth is enabled on your device.
- Move the keyboard closer to your device to reduce interference.
- Remove the keyboard from your device's Bluetooth list and re-pair it.
- Check if your device's operating system meets the compatibility requirements (Windows 8/10, Mac OS iOS 13+).

### 6.3. Backlight Not Working or Dim

- Ensure the keyboard is charged. Low battery can affect backlight performance.
- Adjust brightness using Fn + . / /.
- Cycle through lighting effects using Fn + I / O / P.

### 6.4. No Driver Detected

Please note that this product does not require a specific driver installation. It is designed for plug-and-play functionality.

## 7. Specifications

| Feature | Description |
|---|---|
| Model Number | KM32-Black (GM901D) |
| Dimensions (L x W x H) | 340 x 108 x 35 mm (13.39 x 4.25 x 1.38 inches) |
| Net Weight | Approx. 0.65 kg (790 g product dimensions) |
| Key Switch Type | Brown Switch |
| Operating Force | Approx. 60g |
| Key Numbers | 68 Keys |
| Key Life | >50 million times |
| Keycap Type | ABS Double Shot Keycaps |
| Connectivity | Wired (Detachable Type-C), Bluetooth 5.0 |
| Battery | Built-in 2000mAh Lithium Battery (3.7 Watt Hours, 0.3g Lithium) |
| Battery Life | Up to 12 hours with backlight on |
| Backlight | RGB (17 lighting effects) |
| Operating System Compatibility | Windows 8/10, Mac (iOS 13+), Android, iOS |
| Hardware Platform | Laptop, PC |
| Included Components | USB Cable, User Manual (Keycap Puller mentioned in specs, but not in package contents) |

## 8. Warranty and Support

All DELUX products come with a**12-month warranty** from the date of purchase. Additionally, DELUX provides**free lifetime technical support** for this product. If you encounter any issues or have questions, please contact DELUX customer support through their official channels.

© 2023 DeLUX. All rights reserved.


### Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

**Name**

Anonymous

**Email**

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

**Question**

Example: How do I reset this device or fix this error?

**Details**

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question



**Open the live page**

**https://manuals.plus/asin/B08N9NPKL6**

More documents and user manuals: **https://manuals.plus/**