

[Manuals.plus](#) /

› [B.K.Licht](#) /

› B.K.Licht 3-Flame GU10 Ceiling Lamp Instruction Manual

B.K.Licht BKL1456

B.K.Licht 3-Flame GU10 Ceiling Lamp Instruction Manual

Model: BKL1456

1. INTRODUCTION

Thank you for purchasing the B.K.Licht 3-Flame GU10 Ceiling Lamp. This modern ceiling light features three adjustable spotlights, allowing for flexible illumination in various indoor spaces. This manual provides essential information for safe installation, operation, and maintenance of your new lighting fixture. Please read these instructions carefully before installation and retain them for future reference.



Image 1: Overview of the B.K.Licht 3-Flame GU10 Ceiling Lamp in Matte White.

2. SAFETY INSTRUCTIONS

WARNING: Electrical installation should only be performed by a qualified electrician. Incorrect installation can lead to electric shock, fire, or damage to the product.

- Always disconnect the main power supply before attempting any installation, maintenance, or bulb replacement.
- Ensure the voltage supply matches the fixture's requirements (230 Volts).
- This product is designed for **indoor use only**. Do not install in wet or damp locations.
- Use only GU10 bulbs with a maximum wattage of 9 watts per socket. Exceeding this limit can cause overheating and damage.
- Ensure all connections are secure and properly insulated.
- Do not cover the lamp with any materials that could obstruct heat dissipation.
- Keep packaging materials out of reach of children.

3. PACKAGE CONTENTS

Please check that all components are present and undamaged before proceeding with installation.

- 1x B.K.Licht 3-Flame GU10 Ceiling Lamp (Model BKL1456)
- 1x Mounting Bracket
- 2x Screws
- 2x Wall Plugs (Dowels)
- Installation Instructions (this manual)

Note: GU10 bulbs are **not included** and must be purchased separately.

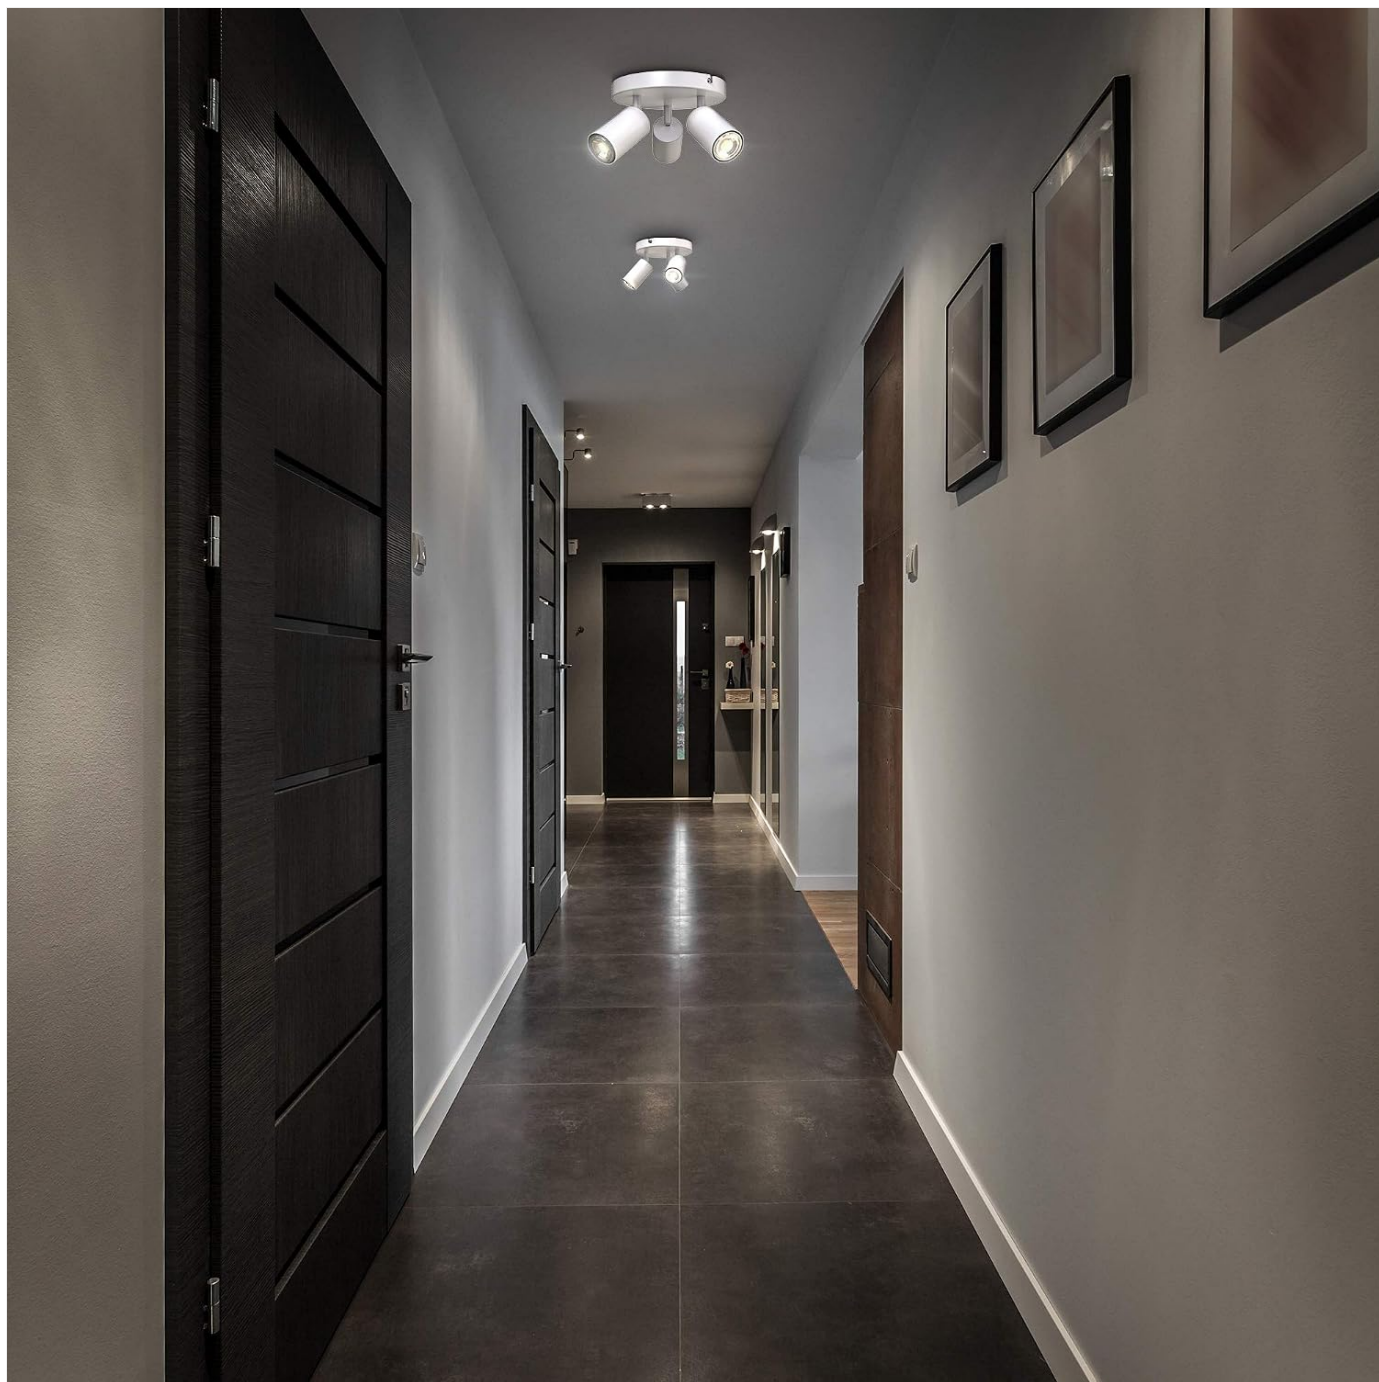


Image 2: The fixture requires GU10 bulbs, which are not included.

4. SETUP AND INSTALLATION

Before beginning installation, ensure the power supply to the installation area is switched off at the main circuit breaker.

1. Prepare the Mounting Location:

Identify the desired ceiling location for the lamp. Ensure the surface is suitable for mounting and can support the weight of the fixture (0.66 kg). The mounting holes have a distance of 90 mm.



Image 3: Product dimensions for installation planning.

2. Attach the Mounting Bracket:

Using the provided screws and wall plugs, securely attach the mounting bracket to the ceiling. Ensure it is firmly fixed and level.

3. Electrical Connection:

Connect the household electrical wires to the terminal block on the lamp. Ensure correct polarity: Live (L), Neutral (N), and Earth (Ground). If you are unsure, consult a qualified electrician.

4. Mount the Fixture:

Carefully align the lamp body with the mounting bracket and secure it using the provided screws. Ensure no wires are pinched during this process.

5. Insert GU10 Bulbs:

Insert the GU10 bulbs into each of the three sockets. Push the bulb into the socket and twist clockwise to lock it in place.



Image 4: Detail of the GU10 socket and adjustable spotlight mechanism.

6. Restore Power:

Once installation is complete and all connections are secure, restore power at the main circuit breaker.

5. OPERATING INSTRUCTIONS

- **Turning On/Off:** The lamp is operated via a standard wall switch connected to your electrical circuit.
- **Adjusting Spotlights:** Each of the three spotlights can be individually rotated and swiveled to direct light precisely where needed. Gently adjust the spotlights by hand.
- **Dimmability:** This fixture is compatible with dimmable GU10 LED bulbs and an appropriate dimmer switch (not included). Ensure both the bulbs and the dimmer switch are compatible with each other and suitable for LED lighting.



Image 5: Example of the lamp installed, demonstrating its adjustable lighting capability.

6. MAINTENANCE

- **Cleaning:** Disconnect power before cleaning. Wipe the fixture with a soft, dry cloth. Do not use abrasive cleaners or solvents, as these can damage the matte white finish.
- **Bulb Replacement:** Ensure the power is off and the bulbs have cooled down before attempting to replace them. Twist the old GU10 bulb counter-clockwise and pull it out. Insert the new GU10 bulb by pushing it in and twisting clockwise.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Lamp does not light up.	- No power supply. - Bulb is faulty or not inserted correctly. - Loose wiring connection.	- Check the main circuit breaker and wall switch. - Replace the bulb or ensure it is properly seated. - Consult a qualified electrician to check wiring.
Light flickers.	- Incompatible dimmer switch or bulb. - Loose bulb connection.	- Ensure dimmable bulbs and dimmer switch are compatible. - Re-seat the bulb or replace it.
Overheating.	- Bulb wattage exceeds maximum limit. - Poor ventilation.	- Replace bulbs with GU10 bulbs not exceeding 9 watts. - Ensure the fixture is not covered.

8. SPECIFICATIONS

Model Number	BKL1456
Brand	B.K.Licht
Material	Metal
Color	Matte White
Fixture Type	Ceiling Spotlight
Number of Sockets	3
Bulb Base	GU10
Max. Wattage per Bulb	9 Watts (LED recommended)
Voltage	230 Volts
Dimensions (L x W x H)	19 cm x 19 cm x 9 cm (Diameter 190mm, Height 90mm)
Item Weight	0.66 Kilograms
Adjustability	Swivel and Rotating Spotlights
Dimmable	Yes, with compatible GU10 LED bulbs and dimmer switch (not included)
Indoor/Outdoor Use	Indoor Use Only

9. WARRANTY AND SUPPORT

For warranty information or technical support, please refer to the purchase documentation or contact your retailer. Keep your proof of purchase for any warranty claims.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B08P3NN7M6>

More documents and user manuals: <https://manuals.plus/>