

LEMEGA M2P

LEMEGA M2P Internet Radio User Manual

Model: M2P

INTRODUCTION

Thank you for choosing the LEMEGA M2P Internet Radio. This manual provides essential information for setting up, operating, and maintaining your device. Please read it thoroughly to ensure optimal performance and safe use of your radio.

The LEMEGA M2P is a versatile audio system featuring Internet Radio, DAB/DAB+/FM digital radio, Bluetooth connectivity, a headphone jack, and an alarm clock function. It can be powered by its built-in rechargeable battery or via mains power, offering both portability and home use convenience.

PRODUCT OVERVIEW

The LEMEGA M2P combines classic design with modern functionality. Its walnut finish wooden cabinet and leather carrying handle provide a premium feel, while the intuitive controls and TFT color display ensure ease of use.



Image: LEMEGA M2P Internet Radio showing its dimensions (23.2cm L x 10cm W x 15.1cm H).

Key Features:

- Internet Radio: Access over 30,000 stations worldwide via Wi-Fi.
- DAB/DAB+ Digital Radio: Enjoy high-quality digital broadcasts.
- FM Radio: Standard analog radio reception.
- Bluetooth Connectivity: Stream audio wirelessly from your devices.
- Headphone Jack: For private listening.
- Alarm Clock: Dual alarms with snooze and sleep timer functions.
- Rechargeable Battery: Provides over 8 hours of playback.
- TFT Color Display: Adjustable brightness for day and night.

SETUP

1. Unpacking and Placement

Carefully remove the radio from its packaging. Place the radio on a stable, flat surface. Ensure adequate ventilation around the unit. Extend the telescopic antenna for optimal DAB/DAB+ and FM reception.

2. Powering On

The LEMEGA M2P can be powered in two ways:

- **Mains Power:** Connect the supplied power adapter to the DC IN socket on the back of the radio and then to a wall outlet.
- **Battery Power:** The radio has a built-in rechargeable lithium-ion battery. Ensure the battery is charged before portable use. Connect to mains power to charge the battery.

3. Initial Setup Wizard

Upon first power-on, the radio will guide you through an initial setup wizard:

1. **Language Selection:** Use the navigation controls to select your preferred language and press OK.
2. **Network Configuration:** The radio will scan for available Wi-Fi networks. Select your network from the list and enter the password using the rotary dial and OK button.
3. **Time and Date:** The time and date will automatically synchronize via DAB or FM signals once a station is tuned, or via the internet connection.



Image: The LEMEGA M2P Internet Radio positioned on a kitchen counter, demonstrating its compact size and aesthetic appeal in a home environment.

OPERATING INSTRUCTIONS

1. Mode Selection

Press the **SOURCE** button to cycle through available modes: Internet Radio, DAB, FM, and Bluetooth.

2. Internet Radio

- Select 'Internet Radio' mode.
- Use the navigation buttons or rotary dial to browse stations by location, genre, or search.
- Press **OK** to select a station.
- To save a preset: While listening to a station, press and hold a preset button (1-40) until 'Preset Saved' appears.

3. DAB/DAB+ Digital Radio

- Select 'DAB' mode. The radio will automatically perform a full scan for available stations.
- Use the navigation buttons or rotary dial to scroll through the station list.
- Press **OK** to select a station.
- To save a preset: While listening to a station, press and hold a preset button (1-40) until 'Preset Saved' appears.

4. FM Radio

- Select 'FM' mode.
- Press the **SCAN** button to automatically search for the next available station.
- Alternatively, use the navigation buttons to manually tune the frequency.
- To save a preset: While listening to a station, press and hold a preset button (1-40) until 'Preset Saved' appears.

5. Bluetooth Speaker

- Select 'Bluetooth' mode. The radio will enter pairing mode.
- On your Bluetooth-enabled device (e.g., smartphone, tablet), search for 'LEMEGA M2P' in the Bluetooth settings.
- Select 'LEMEGA M2P' to pair. Once connected, you can stream audio from your device to the radio.

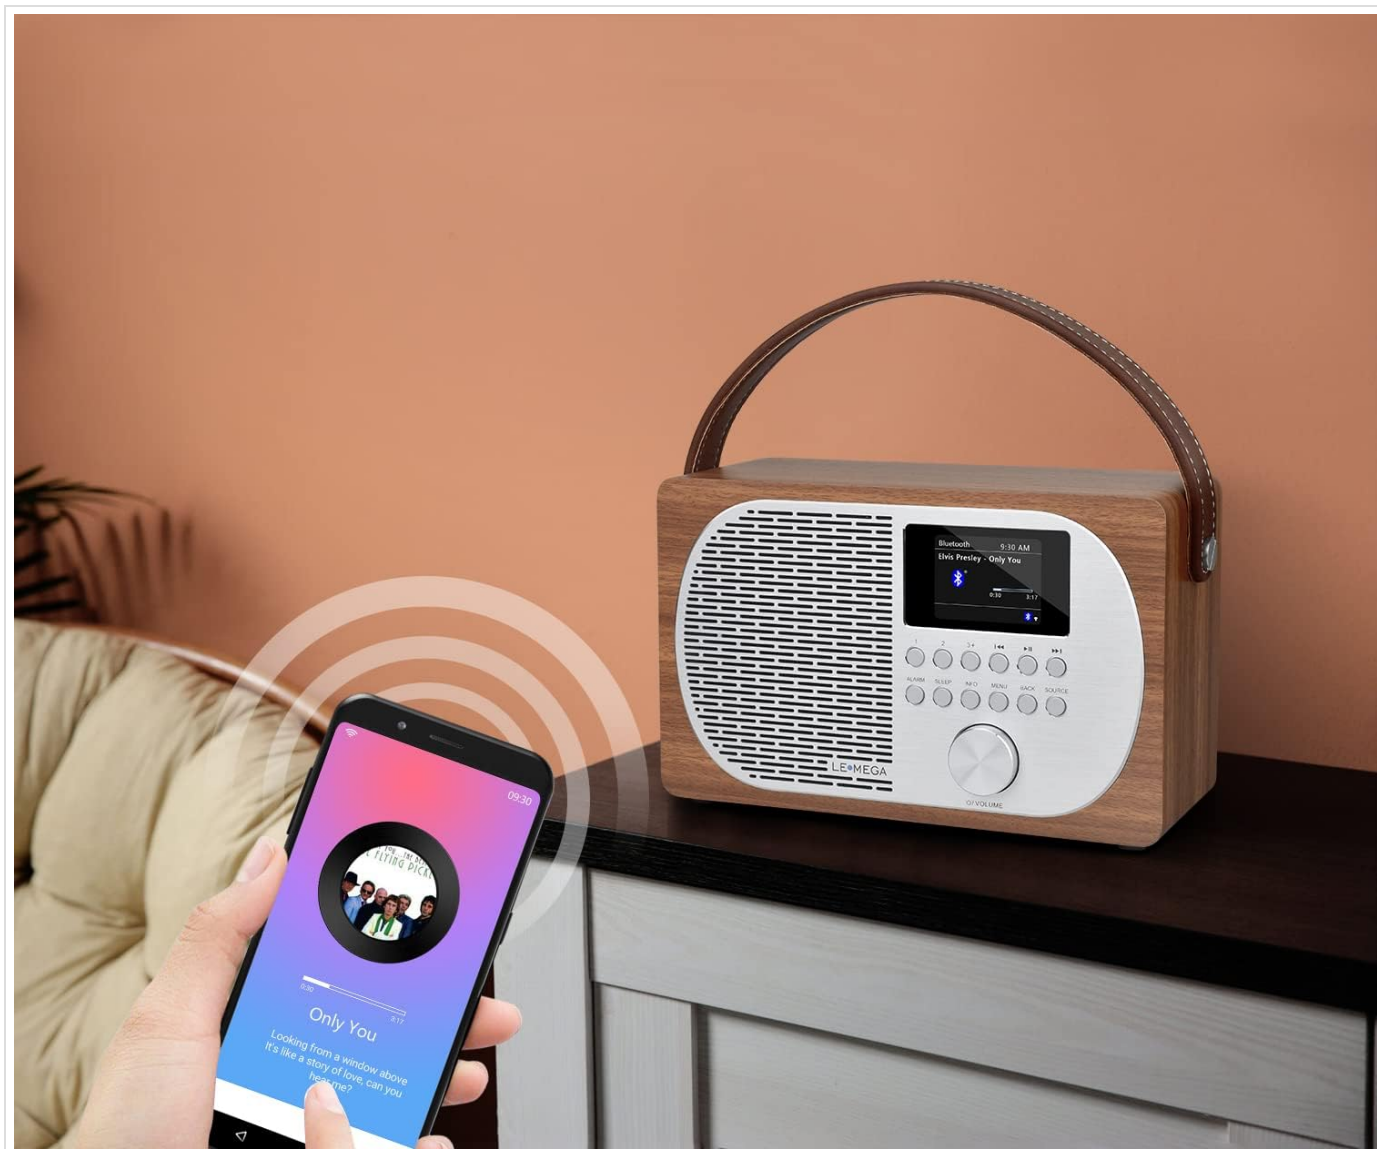


Image: The LEMEGA M2P Internet Radio displaying its Bluetooth connection status, with a smartphone nearby showing music playback, illustrating wireless audio streaming.

6. Alarm Clock and Sleep Timer

- **Setting Alarms:** Press the **ALARM** button to access alarm settings. You can set two independent alarms, choosing the source (music or buzzer), volume, and frequency (daily, weekdays, weekends, or once).
- **Snooze Function:** When an alarm sounds, press any button (except Power) to activate snooze. The alarm will temporarily pause and sound again after a set interval.
- **Sleep Timer:** Press the **SLEEP** button to set a timer for the radio to automatically turn off after a specified duration.

7. Headphone Jack

Connect standard 3.5mm headphones to the headphone jack for private listening. The internal speaker will be muted automatically.

MAINTENANCE

Cleaning

To clean the radio, use a soft, dry cloth. Do not use abrasive cleaners, waxes, or solvents as these can damage the finish. Avoid spraying liquids directly onto the unit.

Battery Care

To prolong the life of the built-in rechargeable battery:

- Avoid fully discharging the battery frequently.
- Charge the battery regularly, even if the radio is not in frequent use.
- Store the radio in a cool, dry place when not in use for extended periods.

TROUBLESHOOTING

Problem	Possible Cause	Solution
No power	Power adapter not connected; Battery discharged	Ensure power adapter is securely connected; Charge the battery.
No sound	Volume too low; Mute activated; Headphones connected	Increase volume; Check mute status; Disconnect headphones.
Poor radio reception (DAB/FM)	Antenna not extended; Weak signal area	Fully extend the telescopic antenna; Reposition the radio for better signal.
Internet Radio not connecting	Incorrect Wi-Fi password; Weak Wi-Fi signal; Router issue	Verify Wi-Fi password; Move radio closer to router; Restart router.
Bluetooth pairing issues	Radio not in pairing mode; Device too far; Already paired with another device	Ensure radio is in Bluetooth mode; Keep devices within range; Disconnect from other devices.

SPECIFICATIONS

- **Brand:** LEMEGA
- **Model Number:** M2P
- **Product Dimensions:** 23.2L x 10W x 15.1H cm
- **Weight:** 2.24 kg
- **Power Source:** Battery-Powered (1 Lithium-ion battery included) or Mains
- **Supported Radio Bands:** Internet Radio, DAB/DAB+, FM
- **Connectivity Technology:** Bluetooth
- **Display Type:** TFT Color Display
- **Special Features:** Backlit display, Alarm Clock, Snooze, Sleep Timer, Headphone Jack
- **Manufacturer:** LEMEGA

WARRANTY AND SUPPORT

LEMEGA products are designed and manufactured to the highest quality standards. For information regarding warranty coverage and customer support, please refer to the warranty card included with your product or visit the official LEMEGA website. Keep your proof of purchase for any warranty claims.

For technical assistance or further inquiries, please contact LEMEGA customer service through the contact details provided in your product documentation or on the brand's official support channels.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question