

LEMEGA IR4S

LEMEGA IR4S Internet Radio User Manual

Model: IR4S

1. INTRODUCTION

Thank you for choosing the LEMEGA IR4S Internet Radio. This comprehensive guide provides detailed instructions for setting up, operating, and maintaining your device to ensure optimal performance and longevity. Please read this manual thoroughly before using the product.

The LEMEGA IR4S is a versatile smart radio offering a wide range of audio experiences, including Internet Radio, DAB/DAB+ digital radio, FM radio, Spotify Connect, and Bluetooth connectivity. It features dual alarms and 60 preset stations for your convenience.



Front view of the LEMEGA IR4S Internet Radio, showcasing its display and control buttons.

2. WHAT'S IN THE BOX

Upon unboxing your LEMEGA IR4S, please ensure all components are present:

- LEMEGA IR4S Internet Radio Unit
- Power Adapter
- User Manual (this document)

If any items are missing or damaged, please contact LEMEGA customer support immediately.

3. SETUP

3.1 Power Connection

1. Connect the power adapter to the DC IN port on the back of the LEMEGA IR4S.
2. Plug the power adapter into a standard wall outlet.
3. The unit will power on automatically or enter standby mode.

Alternatively, the unit can be powered by AA batteries for portability (batteries not included).

3.2 Initial Setup and Network Connection

Upon first power-on, the radio will guide you through the initial setup process, including language selection and network configuration.

1. Follow the on-screen prompts to select your preferred language.
2. The radio will scan for available Wi-Fi networks. Select your network from the list.
3. Enter your Wi-Fi password using the navigation controls and confirm.
4. Once connected, the radio will synchronize the time and date automatically.



IR4 Stereo Smart Radio



Internet Radio



DAB/DAB+
Radio



Spotify



Bluetooth



FM Radio



Dual Alarms

The LEMEGA IR4S positioned in a kitchen environment, highlighting its compact size.

4. OPERATING INSTRUCTIONS

4.1 Controls Overview

The LEMEGA IR4S features intuitive controls for easy navigation:

- **Power/Volume Knob:** Press to power on/off, rotate to adjust volume.
- **Menu Button:** Access the main menu.
- **Back Button:** Return to the previous screen.
- **Play/Pause Button:** Control playback.
- **Skip Buttons:** Navigate through tracks or stations.
- **Info Button:** Display additional information about the current broadcast.
- **Source Button:** Switch between different audio sources (Internet Radio, DAB, FM, Bluetooth).

- **Preset Buttons (1, 2, 3+):** Quickly access saved stations.

4.2 Modes of Operation

4.2.1 Internet Radio

Access thousands of radio stations from around the world via your Wi-Fi connection.

1. Press the **Source** button and select "Internet Radio".
2. Navigate through categories (e.g., Location, Genre) or use the search function to find stations.
3. Select a station to begin playback.



The LEMEGA IR4S displaying an Internet Radio station, with its antenna extended.

4.2.2 DAB/DAB+ Digital Radio

Enjoy high-quality digital radio broadcasts.

1. Press the **Source** button and select "DAB Radio".
2. The radio will automatically scan for available DAB/DAB+ stations.
3. Use the navigation buttons to browse and select stations.

4.2.3 FM Radio

Tune into traditional FM broadcasts.

1. Press the **Source** button and select "FM Radio".
2. Use the navigation buttons to manually tune or auto-scan for stations.

4.2.4 Bluetooth Mode

Stream audio wirelessly from your Bluetooth-enabled devices.

1. Press the **Source** button and select "Bluetooth".
2. The radio will enter pairing mode.
3. On your device (e.g., smartphone), enable Bluetooth and select "LEMEGA IR4S" from the list of available devices.
4. Once paired, audio from your device will play through the radio.



The LEMEGA IR4S wirelessly connected to a smartphone, demonstrating Bluetooth audio streaming.

4.2.5 Spotify Connect

Control your Spotify music directly from the Spotify app on your phone, tablet, or computer.

1. Ensure your LEMEGA IR4S and your device running the Spotify app are connected to the same Wi-Fi network.
2. Open the Spotify app on your device.
3. Play a song and tap "Devices Available" (or the speaker icon).
4. Select "LEMEGA IR4S" from the list.

4.3 Presets

Save your favorite stations for quick access (up to 60 presets).

- **To Save a Preset:** While listening to a station, press and hold one of the preset buttons (1, 2, or 3+) until "Preset Saved" appears on the display. For presets beyond 3, use the 3+ button and navigate to the desired slot.
- **To Recall a Preset:** Briefly press the corresponding preset button (1, 2, or 3+) to tune to the saved station.

4.4 Alarms

Set up to two independent alarms.

1. Press the **Menu** button and navigate to "System Settings" > "Alarm".
2. Select Alarm 1 or Alarm 2.
3. Configure the alarm time, source (Buzzer, Internet Radio, DAB, FM), frequency (Daily, Once, Weekdays, Weekends), and volume.
4. Confirm settings to activate the alarm.



The LEMEGA IR4S serving as a bedside alarm clock, displaying the time and alarm icon.

5. MAINTENANCE

5.1 Cleaning

- Always unplug the radio from the power outlet before cleaning.
- Use a soft, dry, lint-free cloth to wipe the exterior surfaces.
- Do not use abrasive cleaners, waxes, or solvents as they may damage the finish.

5.2 Storage

If storing the unit for an extended period, ensure it is clean and dry. Store it in a cool, dry place away from direct sunlight and extreme temperatures.

6. TROUBLESHOOTING

Problem	Possible Cause	Solution
No power	Power adapter not connected; outlet not active.	Check power connections; try a different outlet.
No sound	Volume too low; Mute activated; incorrect source selected.	Increase volume; check mute status; ensure correct audio source is selected.
Cannot connect to Wi-Fi	Incorrect password; Wi-Fi signal too weak; router issue.	Verify password; move radio closer to router; restart router.
Internet Radio buffering/disconnecting	Weak Wi-Fi signal; internet connection issues.	Improve Wi-Fi signal strength; check internet service.
DAB/FM reception poor	Antenna not extended; poor signal area.	Fully extend the telescopic antenna; reposition the radio for better reception.
Bluetooth pairing issues	Radio not in pairing mode; device already paired with another unit.	Ensure radio is in Bluetooth pairing mode; unpair from other devices.

7. SPECIFICATIONS

- Model:** LEMEGA IR4S
- Dimensions:** 23.5 x 11.5 x 7.7 cm (L x W x H)
- Weight:** 810 grams
- Audio Output:** 2 x 2.5-inch full-range drivers, 5 Watts (max)
- Connectivity:** Wi-Fi, Bluetooth 5, 3.5mm Audio Out, USB-C (for power)
- Radio Tuner:** Internet Radio, DAB/DAB+, FM (108 MHz frequency)
- Presets:** 60 station presets
- Power Source:** AC Power Adapter (included), AA Batteries (not included)
- Display:** LCD Color Display
- Additional Features:** Spotify Connect, Dual Alarms, Portable design

8. WARRANTY AND SUPPORT

8.1 Warranty Information

LEMEGA products are covered by a limited warranty. Please refer to the warranty card included with your product or visit the official LEMEGA website for detailed warranty terms and conditions. Keep your purchase receipt as proof

of purchase.

8.2 Customer Support


For technical assistance, troubleshooting, or general inquiries, please contact LEMEGA customer support. You can find contact information on the official LEMEGA website or through your retailer.

LEMEGA EU Seller: [LEMEGA EU](#)

For the latest updates and support resources, visit the LEMEGA official website.

© 2025 LEMEGA. All rights reserved.

Documents - LEMEGA – IR4S

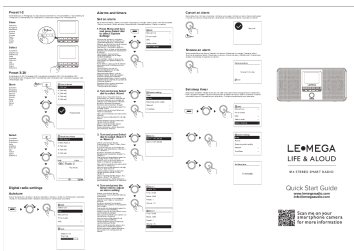


[\[pdf\]](#) User Manual Owner's Manual Quick Start Guide Guide Recall

IR4S Quick Start Guide Owner s Manual Download cc9c86d6f22ddcb4081a7cf57ddb27c7 lemegaaudio d file p 2024 11 12 |||

Preset 1-2 Voreinstellung 12 / Prrglage 1-2 / Impostazioni predefinite 1-2 / Forudindstillet 1-2 / V ... ening / Bedieningselementen / Controles / Kontrollerr / Ovdac prvky / Elementy sterujce / Controlos **IR4S** when powered by batteries Schalten Sie **IR4S** zwischen Ein und Standby Aus im Batteriebetrieb ...

lang:it **score:44** filesize: 6.31 M page_count: 15 document date: 2024-11-12

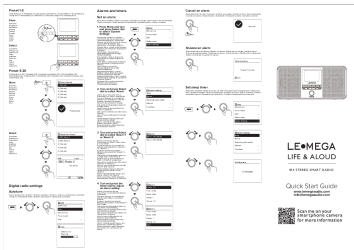

[\[pdf\]](#) Owner's Manual Quick Start Guide Guide Recall

IR4S Quick Start Guide Owner s ManualDownloadcc9c86d6f22ddcb4081a7cf57ddb27c7lemegaaudio d file p 2024 11 12 cc9c86d6f22ddcb4081a7cf57ddb27c7 |||

Preset 1-2 Voreinstellung 12 / Prrglage 1-2 / Impostazioni predefinite 1-2 / Forudindstillet 1-2 / V ... ening / Bedieningselementen / Controles / Kontrollerr / Ovdac prvky / Elementy sterujce / Controlos **IR4S** when powered by batteries Schalten Sie **IR4S** zwischen Ein und Standby Aus im Batteriebetrieb ...

lang:it **score:36** filesize: 6.31 M page_count: 15 document date: 2024-11-12

[\[pdf\]](#) User Manual Owner's Manual

IR 1 User Manual LEMEGA IR4S Stereo WIFI Internet Radio Portable DAB FM Digital Spotify Connect Bluetooth Speaker Dual Alarms Clock 60 Presets Headphone Output Batteries or Mains Powered Grey Electronics Photo 91eszdvCcWL m media amazon images I |||

LIFE ALOUD IR4 Stereo Smart Radio LIFE ALOUD IR4 Stereo Smart Radio If you have any questions or suggestions, please share with us. info lemegaaudio.com www.lemegaaudio.com Owner s manual Table of content 1 Introduction 1.1 Safety 1.2 Features 1.3 Carton contents 2 Controls, connectors and d...

lang:tl **score:28** filesize: 886.09 K page_count: 13 document date: 2020-11-04





[pdf] Frequently Asked Questions Recall

IR4S LEMEGA Stereo WiFi Internet Radio FM Digital Spotify Connect Bluetooth Speaker Dual Alarms
Clock 40 Presets Headphone Output Batteries or Mains Powered Gray Finish FAQ B08W4SK1P9
B08PXXNHL7 B08PXXZBGDV 81h8VhH4wKL m media amazon images I |||

Hello , Thank you for purchasing the LEMEGA**IR4S** Interent Radio and we apologize for not clearly describing the preset button. To store preset 1,2 Press and hold the preset 1,2 buttons until the display shows the text preset saved with a green tick icon. To store preset 3-20 Press and hold prese...

lang:en **score:27** filesize: 441.41 K page_count: 1 document date: 2022-04-09




[pdf] User Manual Owner's Manual

IR 1 IR4S Owner s Manual ENDownloade64040b4c7ed791803cd15502ab0711dlemegaaudio d file p 2024 11 07 e64040b4c7ed791803cd15502ab0711d |||

LIFE ALOUD IR4 Stereo Smart Radio LIFE ALOUD IR4 Stereo Smart Radio If you have any questions or suggestions, please share with us. info lemegaaudio.com www.lemegaaudio.com Owner s manual Table of content 1 Introduction 1.1 Safety 1.2 Features 1.3 Carton contents 2 Controls, connectors and d...

lang:tl **score:27** filesize: 4.88 M page_count: 13 document date: 2020-11-30

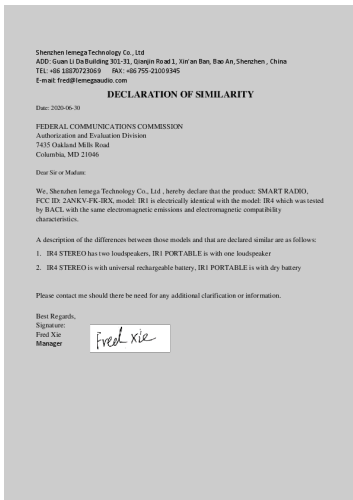

[pdf] Decleration of Conformity

Microsoft Word DOS dg06184 DoS Letter Shenzhen lemega Technology Co Ltd FK IRX SMART RADIO 2ANKV 2ANKVFKIRX fk irx

Shenzhen lemega Technology Co., Ltd ADD: Guan Li Da Building 301-31, Qianjin Road 1, Xin an Ban, Bao An, Shenzhen , China TEL: 86 18870723069 FAX: 86 755-21009345 E-mail: fred lemegaaudio.com DECLARATION OF SIMILARITY Date: 2020-06-30 FEDERAL COMMUNICATIONS COMMISSION Authorization and Evaluation ...

lang:en **score:25** filesize: 50.88 K page_count: 1 document date: 2020-08-17



[pdf] User Manual Owner's Manual

IR 1 Owner s manual 6b246853104546af5a39d89e31aa5b81 lemegaaudio d file Support Owners 2022 04 07 |||

LIFE ALOUD IR4 Stereo Smart Radio LIFE ALOUD IR4 Stereo Smart Radio If you have any questions or suggestions, please share with us. info lemegaaudio.com www.lemegaaudio.com Owner s manual Table of content 1 Introduction 1.1 Safety 1.2 Features 1.3 Carton contents 2 Controls, connectors and d...

lang:tl **score:24** filesize: 6.54 M page_count: 12 document date: 2020-07-15



[pdf]

tom FCC Model Difference Huizhou LEMEDIA Technology Co Limited SRX SMART RADIO 2AVFX 2AVFXSRX srx

Huizhou LEMEDIA Technology Co.,Limited Model Difference Product description: SMART RADIO Model name: SR20 SR10, SR30, SR40, SR50, SR60, SR70, SR80, SR90, IR1P, IR2P, IR3P, IR4P, IR5P, IR6P, **IR4S**, IR1 Trade Name: MangoKit, LEMEGA, LEWOOD All the model are the same circuit and RF module, only the mode...

lang:tl score:17 filesize: 55.71 K page_count: 1 document date: 2024-09-23



[LE MEGA IR4 Smart Radio Owner's Manual](#)

Discover how to set up and use your LE MEGA IR4 Smart Radio with this comprehensive owner's manual. Learn about Internet Radio, DAB, FM, Spotify Connect, Bluetooth, and troubleshooting.

lang:tl score:16 filesize: 2.2 M page_count: 13 document date: 2020-08-17



[pdf]


Tomato Tseng Bedienungsanleitung 98435435138ad65f5b457a2c8a3c0120 lemegaaudio d file Support Owners 2021 11 17 |||

IR4 Stereo-Smart-Radio Bedienungsanleitung Inhalt 1. Sicherheit

.....2 1.1

Sicherheitshinweise.....

lang:de score:13 filesize: 606.36 K page_count: 26 document date: 2020-11-13

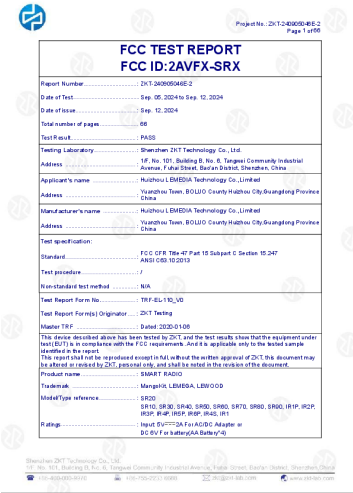

[pdf] Specifications Test Report

Measurement Report Kent Test Huizhou LEMEDIA Technology Co Limited SRX SMART RADIO 2AVFX 2AVFXSRX srx

Project No.: ZKT-240905046E-2 Page 1 of 66 FCC TEST REPORT FCC ID:2AVFX-SRX Report Number..... : SR20 SR10, SR30, SR40, SR50, SR60, SR70, SR80, SR90, IR1P, IR2P, IR3P, IR4P, IR5P, IR6P, **IR4S**, IR1

Ratings..... : Input: 5V 2A For AC/DC Adapter...

lang:en score:10 filesize: 2.74 M page_count: 66 document date: 2024-09-23

FCC TEST REPORT
FCC ID:2AVFX-SRX

[illegible]

[\[pdf\]](#) Specifications Test Report

55013 Jade Test Report Huizhou LEMEDIA Technology Co Limited SRX SMART RADIO 2AVFX
2AVFXSRX.srx

Project No.: ZKT-240905046E-1 Page 1 of 66 FCC TEST REPORT FCC ID:2AVFX-SRX Report Number..... : SR20 SR10, SR30, SR40, SR50, SR60, SR70, SR80, SR90, IR1P, IR2P, IR3P, IR4P, IR5P, IR6P, **IR4S**, IR1

Ratings..... : Input: 5V 2A For AC/DC Adapter...

lang:en score:10 filesize: 5.57 M page_count: 66 document date: 2024-09-23