Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

GOXIUHAN GXH3306H

GOXIUHAN Black Shower Faucet Single Function Trim Kit with Rough-in Valve Set, 8-inch Square Rainfall Shower System (Model GXH3306H)

Instruction Manual

Important Notice & Compatibility

Please read this section carefully before proceeding with installation.



Image: Important compatibility notice. This image shows a warning stating that GOXIUHAN shower trim kits are not compatible with other brand valves and cartridges (e.g., Moen, Delta, Kohler). It illustrates the GOXIUHAN valve and examples of incompatible valves.

GOXIUHAN shower trim kits are specifically designed for use with GOXIUHAN valves and cartridges only. They are not compatible with valves from other brands such as Moen, Delta, or Kohler.
If you are replacing an existing shower system, the old shower valve body and trims must be removed before installing this kit. This kit includes a new shower valve for proper installation.

Product Overview

The GOXIUHAN Black Shower Faucet Single Function Trim Kit provides a modern and efficient showering experience. This system features an 8-inch square rainfall shower head and a single-handle control for water temperature and flow.

Included Components



Image: Package contents. This image displays all components included in the GOXIUHAN shower system kit, including the 8-inch square rainfall shower head, shower valve, trim plate, handle, shower arm, and mounting hardware.

- 8-inch Square Rainfall Shower Head
- Shower Arm (6-inch)
- Shower Valve with Trim
- Single-Handle Control
- Mounting Hardware

Note: This kit does not include a bathtub faucet.

Setup and Installation

Professional installation is recommended for this shower system to ensure proper function and prevent leaks. Ensure all local plumbing codes are followed.

Pre-Installation Checks

- Verify that all components listed in the "Included Components" section are present.
- Confirm that the existing plumbing is compatible or prepared for the new valve. Remember, the old valve must be removed.
- Ensure water supply is turned off at the main shut-off valve before beginning any work.

Valve Installation

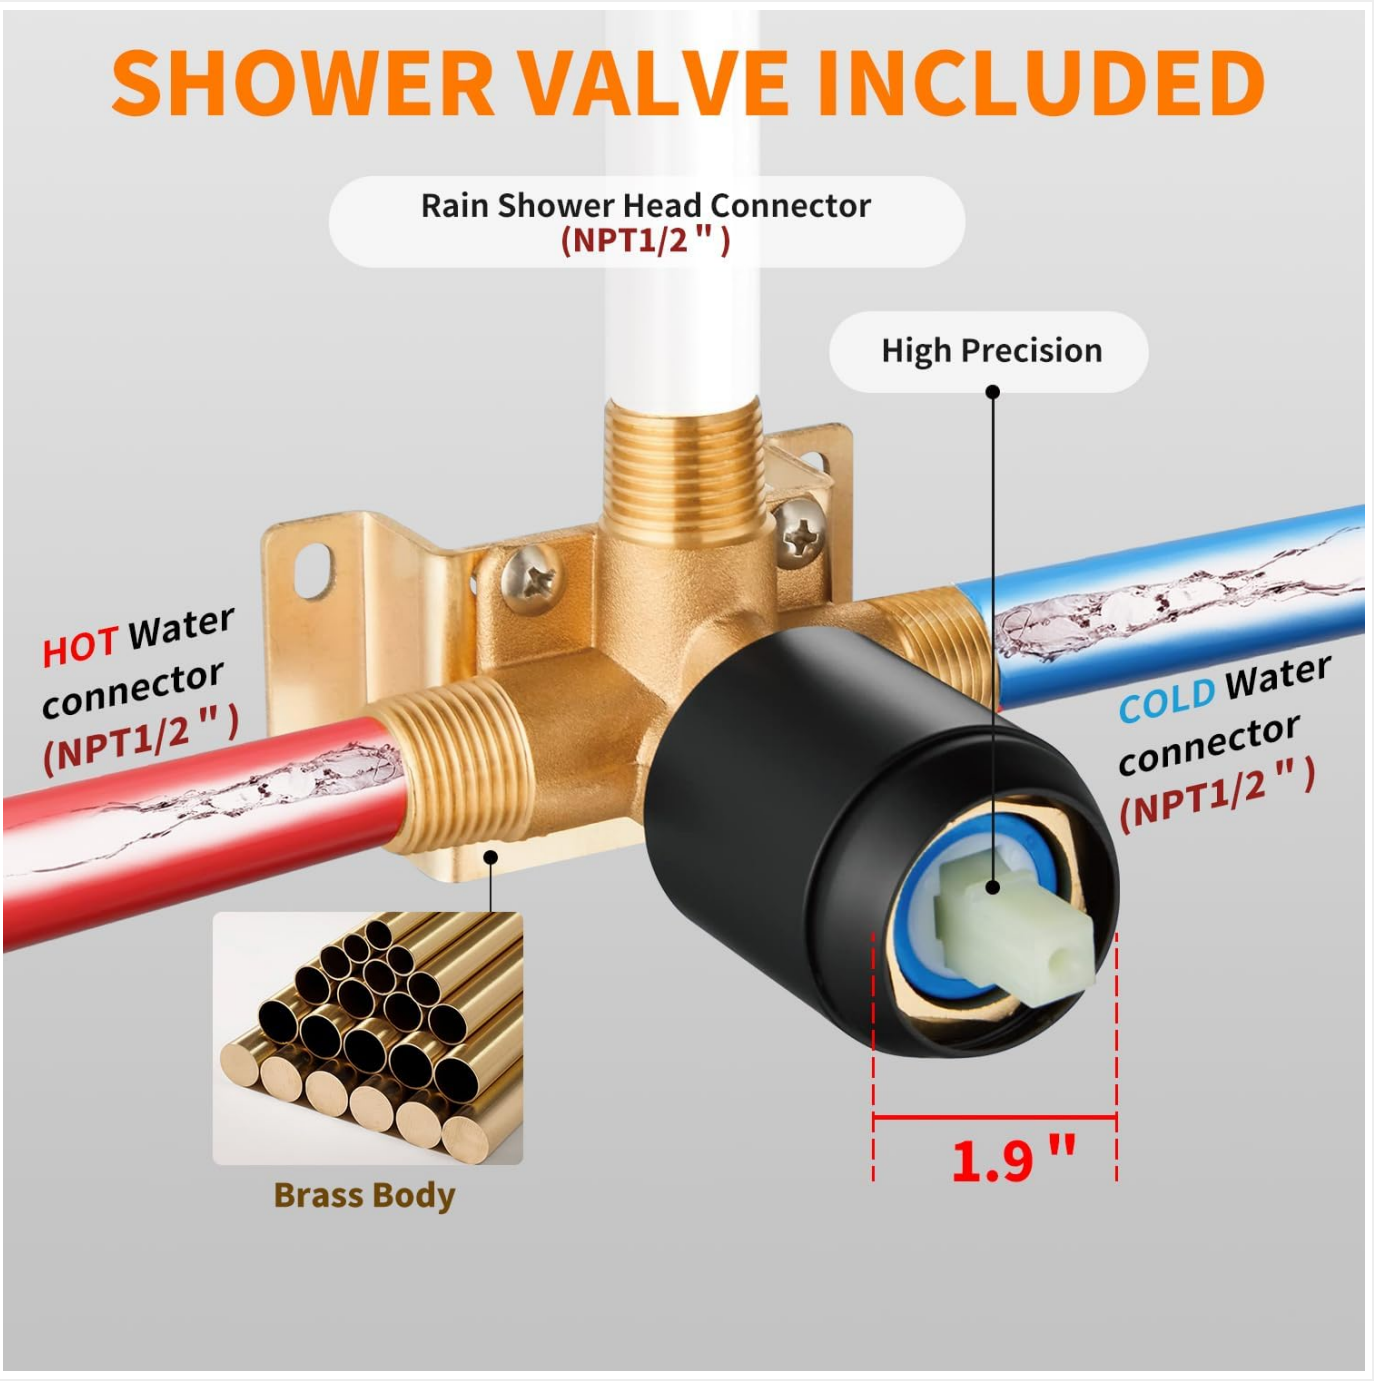


Image: Shower valve details. This image highlights the brass body of the shower valve and its NPT1/2" connectors for hot water, cold water, and the rain shower head. It also shows the internal cartridge and its dimensions.

The included shower valve features a durable brass body and NPT1/2" connectors for hot water, cold water, and the rain shower head. Install the valve securely within the wall, ensuring it is level and at the correct depth for the trim plate. Connect the hot and cold water lines to the corresponding NPT1/2" connectors on the valve. Connect the shower head supply line to the designated NPT1/2" connector.

Shower Head and Arm Installation



Image: Rain shower head features. This image shows the 8-inch square rain shower head, highlighting its 360-degree adjustable angle connector and easy-to-clean silicone nozzles. It also shows the brass shower arm.

Attach the 6-inch brass shower arm to the wall connection. Ensure a watertight seal using plumber's tape or sealant as appropriate.

Screw the 8-inch square rainfall shower head onto the shower arm. The shower head features a 360-degree adjustable angle connector, allowing you to customize the spray direction.

Trim Plate and Handle Installation



Image: Single-handle design. This image illustrates the single-handle control for the shower system, showing how it moves to adjust between hot and cold water.

Install the matte black trim plate over the shower valve, securing it to the wall. Attach the single-handle control to the valve stem. Test the handle's movement to ensure smooth operation for temperature and flow control.

Installation Video Guide

[redacted]

Video: Luxury 8 Inch Matte Black Rainfall Shower Head System. This video provides a visual overview of the GOXIUHAN shower system, showcasing its components and design, which can assist with understanding the installation process.

Operating Instructions

The GOXIUHAN shower system is designed for simple and intuitive operation.

Water Flow and Temperature Control



Image: Single-handle operation. This image demonstrates how to use the single handle to control both water temperature (hot and cold) and water flow rate.

- To turn the water on or off, rotate the single handle.
- To adjust the water temperature, move the handle left for hotter water and right for colder water.
- The valve is designed to offer consistent powerful shower even under low water pressure.

Rainfall Shower Head



Image: Product dimensions. This image provides the dimensions of the 8-inch square rainfall shower head (8 inches by 8 inches, 1.9 inches thick) and the control handle (4.7 inches by 4 inches).

The 8-inch square rainfall shower head provides a wide and consistent water flow for a comfortable showering experience. The shower head can be manually adjusted 360 degrees to direct the water flow as desired.

Maintenance

Regular maintenance will help preserve the finish and functionality of your GOXIUHAN shower system.

Cleaning the Finish

The multi-layer Matte Black finish is designed to resist daily scratches, corrosion, and tarnishing. To clean, use a soft cloth with mild soap and water. Avoid abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the finish.

Cleaning the Shower Head Nozzles

The rainfall shower head features soft silicone spray holes. To remove calcium and lime build-up, simply wipe the nozzles

with your finger or a soft cloth. This helps maintain consistent water flow and prevents clogging.

Troubleshooting

If you encounter any issues with your shower system, please refer to the common problems and solutions below. If the problem persists, contact customer support.

Problem	Possible Cause	Solution
Low Water Pressure	Clogged shower head nozzles; partially closed main water valve; low household water pressure.	Clean silicone nozzles by wiping them. Ensure main water valve is fully open. Consult a plumber if household water pressure is consistently low.
Water Leaks from Shower Head	Loose connection; damaged washer/seal.	Ensure the shower head is tightly screwed onto the shower arm. Check and replace any damaged washers or seals.
Difficulty Adjusting Temperature	Valve cartridge issue; incorrect installation of handle.	Ensure the handle is correctly installed. If the issue persists, the valve cartridge may need inspection or replacement by a qualified plumber.

Specifications

Feature	Detail
Brand	GOXIUHAN
Model Number	GXH3306H
Color	Matte Black
Material	Stainless Steel (Shower Head), Brass (Valve Body, Shower Arm)
Finish Type	Matte Black
Number of Handles	1
Mounting Type	Wall Mount
Shower Head Size	8 inches (Square Rainfall)
Shower Arm Length	6 inches
Included Components	6” shower arm, 8” rain shower head, shower valve with trim
Item Weight	1.53 Kilograms

Support

GOXIUHAN is committed to providing high-quality products and customer satisfaction. If you have any questions, require assistance with installation, or encounter any issues not covered in this manual, please do not hesitate to contact us. We stand by our products and are available to assist you at any time.

For support, please refer to the contact information provided with your purchase or on the official GOXIUHAN website.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0DGKMR5DK

More documents and user manuals: **https://manuals.plus/**