

LAXIHUB P2F-HL-EUM000

LAXIHUB P2 Smart Home Security Camera: User Manual

Model: P2F-HL-EUM000

[Overview](#) [Setup](#) [Introduction](#) [Package Contents](#) [Product](#)
[Operating](#) [Maintenance](#) [Troubleshooting](#) [Specifications](#) [Warranty & Support](#)

1. INTRODUCTION

This user manual provides comprehensive instructions for the LAXIHUB P2 Smart Home Security Camera. This indoor camera offers 360° pan and tilt functionality, 1080p video resolution, infrared night vision, two-way audio, and motion/sound detection. It is designed for monitoring pets, children, or general home security. Please read this manual thoroughly before use and retain it for future reference.

2. PACKAGE CONTENTS

Upon opening the package, verify that all items listed below are present and in good condition:

- LAXIHUB P2 Smart Home Security Camera
- Power Adapter
- USB Power Cable
- Mounting Bracket
- Screws and Wall Plugs
- User Manual (this document)

Note: An SD card is not included and must be purchased separately if local storage is desired.

3. PRODUCT OVERVIEW

Familiarize yourself with the components of your LAXIHUB P2 camera.

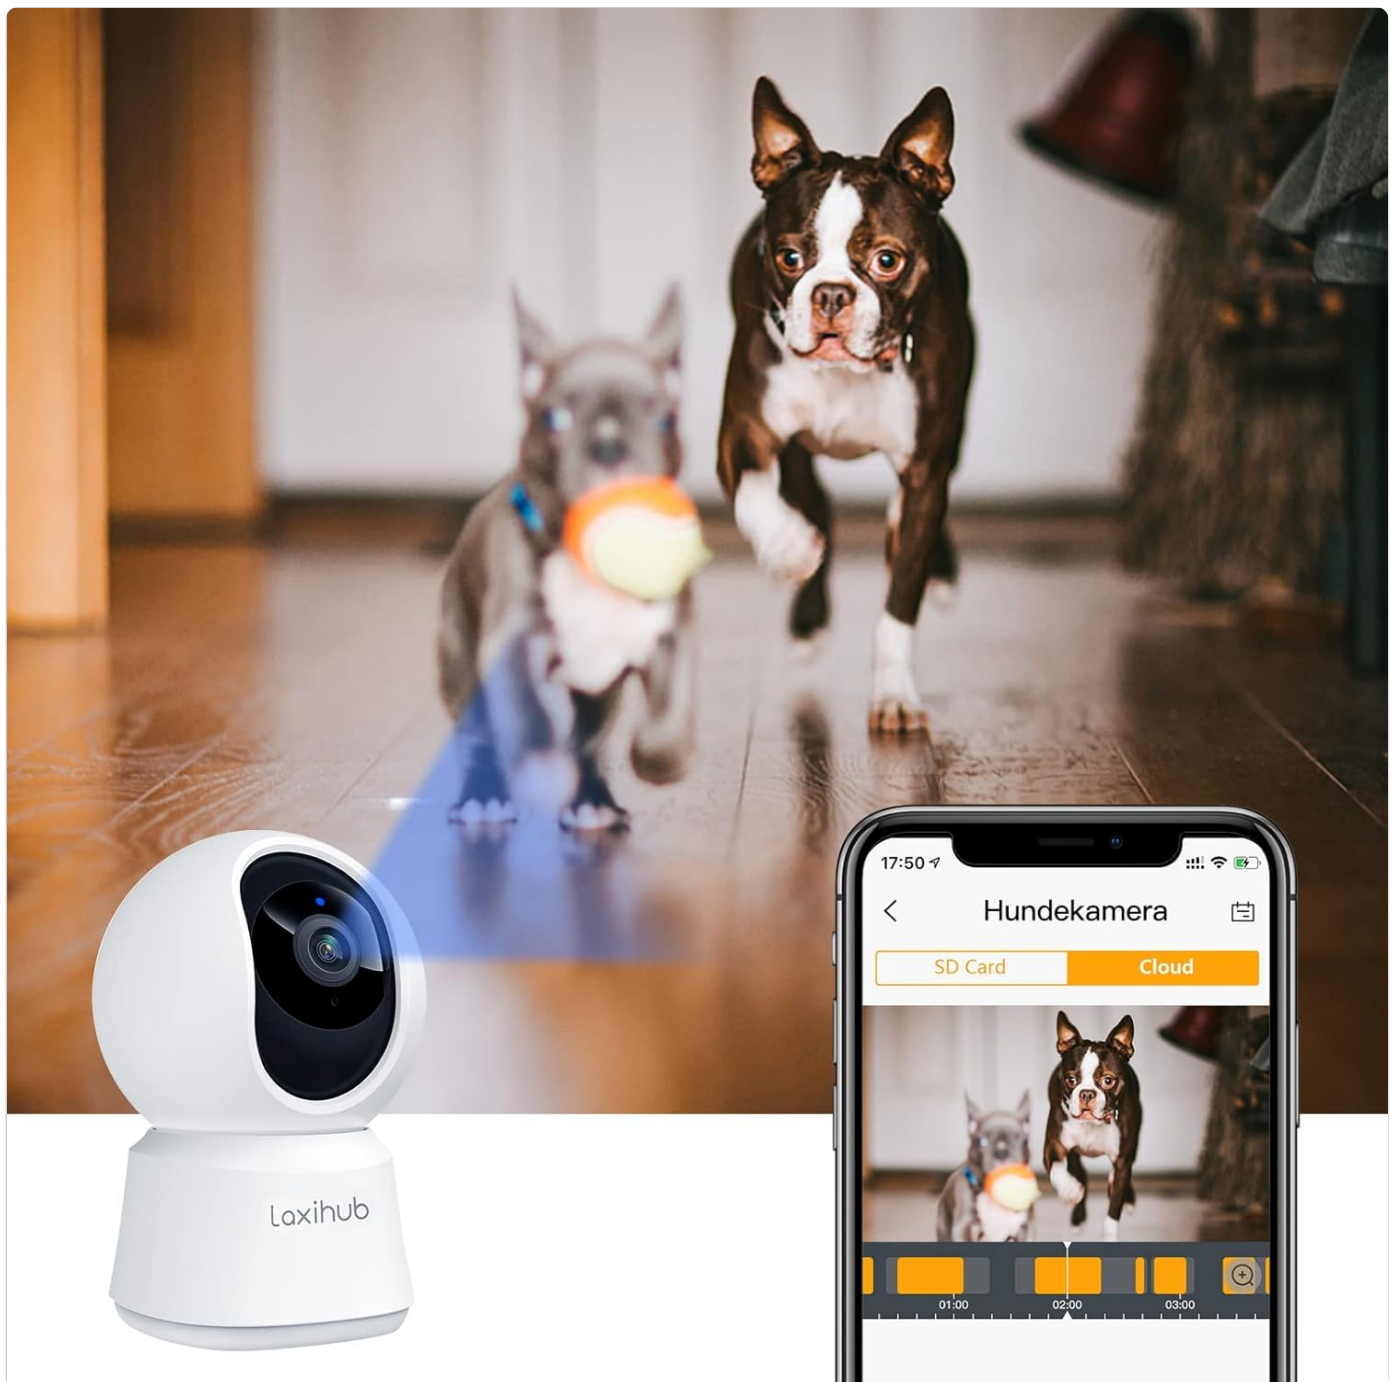


Figure 3.1: LAXIHUB P2 Camera with Pan/Tilt View. This image illustrates the camera's wide field of view and its ability to rotate horizontally (pan) and vertically (tilt), controlled via a smartphone application. The phone screen shows the live video feed from the camera, demonstrating remote monitoring capabilities.

Camera Components:

- **Camera Lens:** Captures video.
- **Infrared LEDs:** Provide night vision capabilities.
- **Microphone:** For audio input and two-way communication.
- **Speaker:** For audio output and two-way communication.
- **Status Indicator Light:** Indicates camera status (e.g., power, network connection).
- **Micro USB Power Port:** Connects to the power adapter.
- **Reset Button:** Used to reset the camera to factory settings.
- **Micro SD Card Slot:** For local video storage (supports compatible Micro SD cards).

4. SETUP

4.1 Download the App

Search for "Laxihub" in the Apple App Store (for iOS devices) or Google Play Store (for Android devices) and download the official application. Alternatively, scan the QR code provided in the quick start guide (if applicable) to download the app.

4.2 Account Registration

1. Open the Laxihub app.
2. Tap "Register" and follow the on-screen prompts to create an account using your email address or phone number.
3. Set a secure password for your account.

4.3 Powering On the Camera

1. Connect the USB power cable to the Micro USB port on the camera.
2. Plug the power adapter into a standard electrical outlet.
3. The camera's status indicator light will turn on, typically blinking red, indicating it is ready for setup.

4.4 Connecting to Wi-Fi

Ensure your smartphone is connected to a 2.4GHz Wi-Fi network. The LAXIHUB P2 camera does not support 5GHz Wi-Fi.

1. In the Laxihub app, tap the "+" icon to add a new device.
2. Select "Smart Camera" or the specific model (P2) if prompted.
3. Follow the in-app instructions to connect the camera to your Wi-Fi network. This usually involves scanning a QR code generated by the app with the camera's lens.
4. Once connected, the status indicator light will turn solid blue.

4.5 Mounting the Camera

The camera can be placed on a flat surface or mounted to a wall or ceiling using the included bracket.

1. **Desktop Placement:** Place the camera on a stable, flat surface with a clear view of the area you wish to monitor.
2. **Wall/Ceiling Mount:**
 - Choose a suitable location for mounting.
 - Attach the mounting bracket to the wall or ceiling using the provided screws and wall plugs.
 - Align the camera with the bracket and twist to secure it in place.
 - Adjust the camera's orientation in the app if necessary (e.g., "Image Rotation" for ceiling mount).

5. OPERATING INSTRUCTIONS

5.1 Live View and Pan/Tilt Control

Open the Laxihub app and select your camera to access the live video feed. Use the on-screen controls to pan (rotate horizontally up to 355°) and tilt (rotate vertically up to 60°) the camera lens to adjust the viewing angle.

5.2 Two-Way Audio



Figure 5.1: Two-Way Audio Functionality. This image depicts a user communicating with a pet through the camera's two-way audio system. The woman speaks into her phone, and the dog appears to react to the sound coming from the camera, demonstrating real-time interaction.

Tap the microphone icon in the app to speak through the camera's speaker. Tap it again to end speaking. You can also listen to audio from the camera's environment through your phone.

5.3 Motion and Sound Detection

Configure detection settings in the app to receive alerts when motion or sound is detected. You can adjust sensitivity levels and set detection zones to minimize false alarms.



Figure 5.2: Motion Detection and Recording. This image shows the LAXIHUB P2 camera capturing activity, specifically two dogs playing. The smartphone screen displays a timeline of recorded events, indicating that the camera automatically records when motion is detected, allowing users to review past footage.

5.4 Night Vision

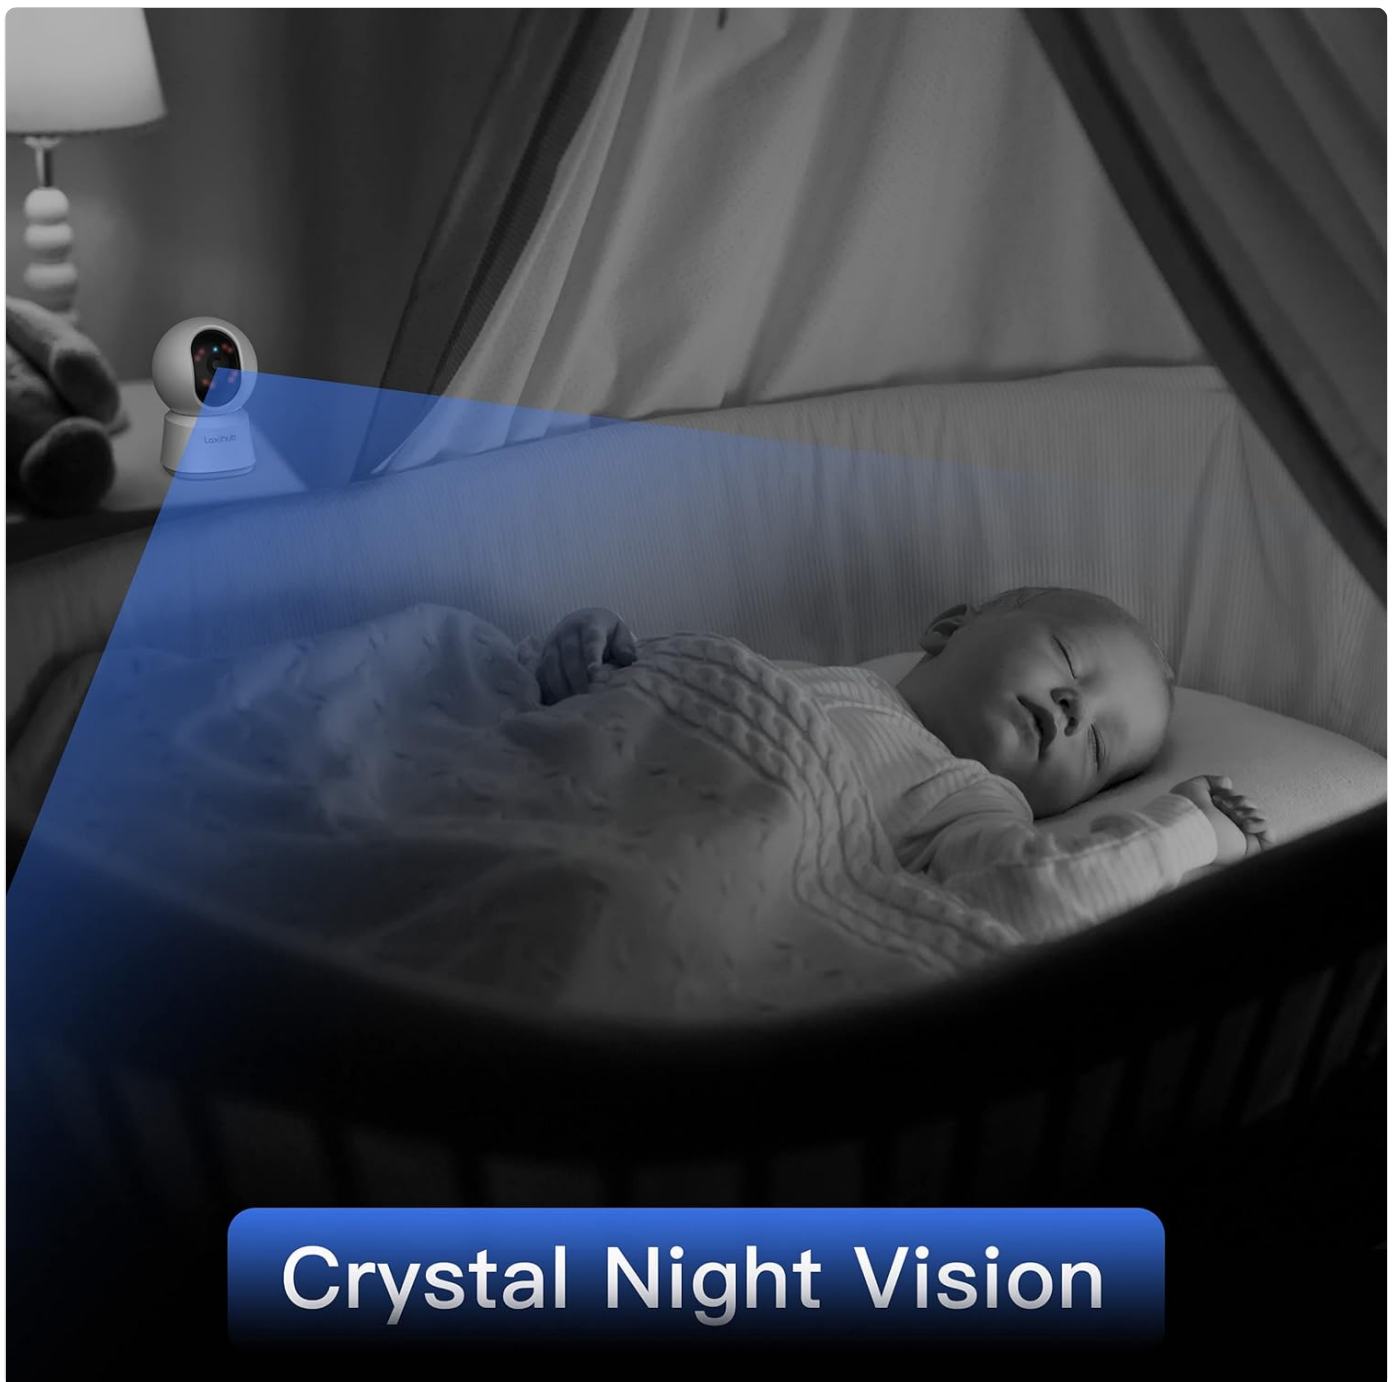


Figure 5.3: Crystal Night Vision. This image demonstrates the camera's night vision capability, showing a clear view of a baby sleeping in a dimly lit room. The blue light emanating from the camera indicates the activation of infrared LEDs for enhanced visibility in low-light conditions.

The camera automatically switches to infrared night vision in low-light conditions, providing clear black-and-white video footage.

5.5 Video Recording and Storage

The camera supports two storage options:

- **Micro SD Card:** Insert a compatible Micro SD card (up to 128GB, not included) into the camera's SD card slot for local storage of recorded events.
- **Cloud Storage:** Optional cloud storage plans are available through the Laxihub app for secure, remote storage of your video recordings.

5.6 Smart Home Integration (Alexa & Google Assistant)

The LAXIHUB P2 camera can be integrated with Amazon Alexa and Google Assistant for voice control and viewing live

feeds on compatible smart displays.

1. Ensure your camera is properly set up in the Laxihub app.
2. Open the Alexa or Google Home app.
3. Search for and enable the "Laxihub" skill/service.
4. Link your Laxihub account when prompted.
5. Discover devices. You can now use voice commands like "Alexa, show me the pet camera" or "Hey Google, show me the living room camera."

6. MAINTENANCE

6.1 Cleaning the Camera

- Ensure the camera is powered off and unplugged before cleaning.
- Use a soft, dry cloth to wipe the camera body.
- For the lens, use a lens cleaning cloth specifically designed for optics to avoid scratches.
- Do not use harsh chemicals, cleaning solvents, or aerosol cleaners.

6.2 Storage

When not in use for extended periods, store the camera in a cool, dry place, away from direct sunlight and extreme temperatures.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution
Camera not powering on	Power cable loose; power adapter faulty; no power from outlet.	Check power cable connection; try a different power adapter or outlet.
Cannot connect to Wi-Fi	Incorrect Wi-Fi password; camera too far from router; 5GHz Wi-Fi network; camera not in pairing mode.	Verify Wi-Fi password; move camera closer to router; ensure you are using a 2.4GHz network; reset camera and try pairing again.
No video feed in app	Camera offline; poor internet connection; app issue.	Check camera's status light (should be solid blue); restart router; restart camera; close and reopen the app.
Two-way audio not working	Microphone/speaker muted in app; volume too low; network latency.	Check app settings for mute/volume; ensure stable internet connection.
Motion/sound alerts not received	Detection settings off; sensitivity too low; app notifications disabled.	Enable detection in app; increase sensitivity; check phone's notification settings for the Laxihub app.

8. SPECIFICATIONS

Model Number	P2F-HL-EUM000
Video Resolution	1080p (Full HD)
Field of View	355° Pan, 60° Tilt

Connectivity	Wi-Fi (2.4GHz only)
Night Vision	Infrared (IR)
Audio	Two-Way Audio
Storage Options	Micro SD Card (up to 128GB, not included), Cloud Storage (subscription required)
Power Input	5V DC, 1A (4.5W)
Indoor/Outdoor Use	Indoor Only
Compatible Devices	Smartphones (iOS, Android), Amazon Alexa, Google Assistant
Dimensions	3.31 x 3.31 x 6.69 inches

9. WARRANTY AND SUPPORT

LAXIHUB products are designed and manufactured to the highest quality standards. For detailed warranty information, please refer to the warranty card included with your product or visit the official LAXIHUB website. If you encounter any issues or have questions regarding your LAXIHUB P2 camera, please contact LAXIHUB customer support through the app or their official website for assistance.

Manufacturer: LAXIHUB

