

[Manuals.plus](#) /

› [BIUBLE](#) /

› BIUBLE Car Jump Starter JS002 User Manual

BIUBLE JS002

BIUBLE Car Jump Starter User Manual

Model: JS002

PRODUCT OVERVIEW

The BIUBLE JS002 Car Jump Starter is a versatile and powerful device designed to provide emergency jump-starting for vehicles, act as a portable power bank, and offer an emergency LED flashlight. With a 2500A peak current, it is capable of starting most 12-volt dead vehicles, including those with all gas or up to 8.0L diesel engines. Its robust design ensures durability and reliability in various conditions.



Image: The BIUBLE JS002 Car Jump Starter unit with its smart jumper cables, USB-C charging cable, DC charger, and exquisite carrying case.

PACKAGE CONTENTS

Please verify that all items are present in your package:

WHAT'S IN THE BOX

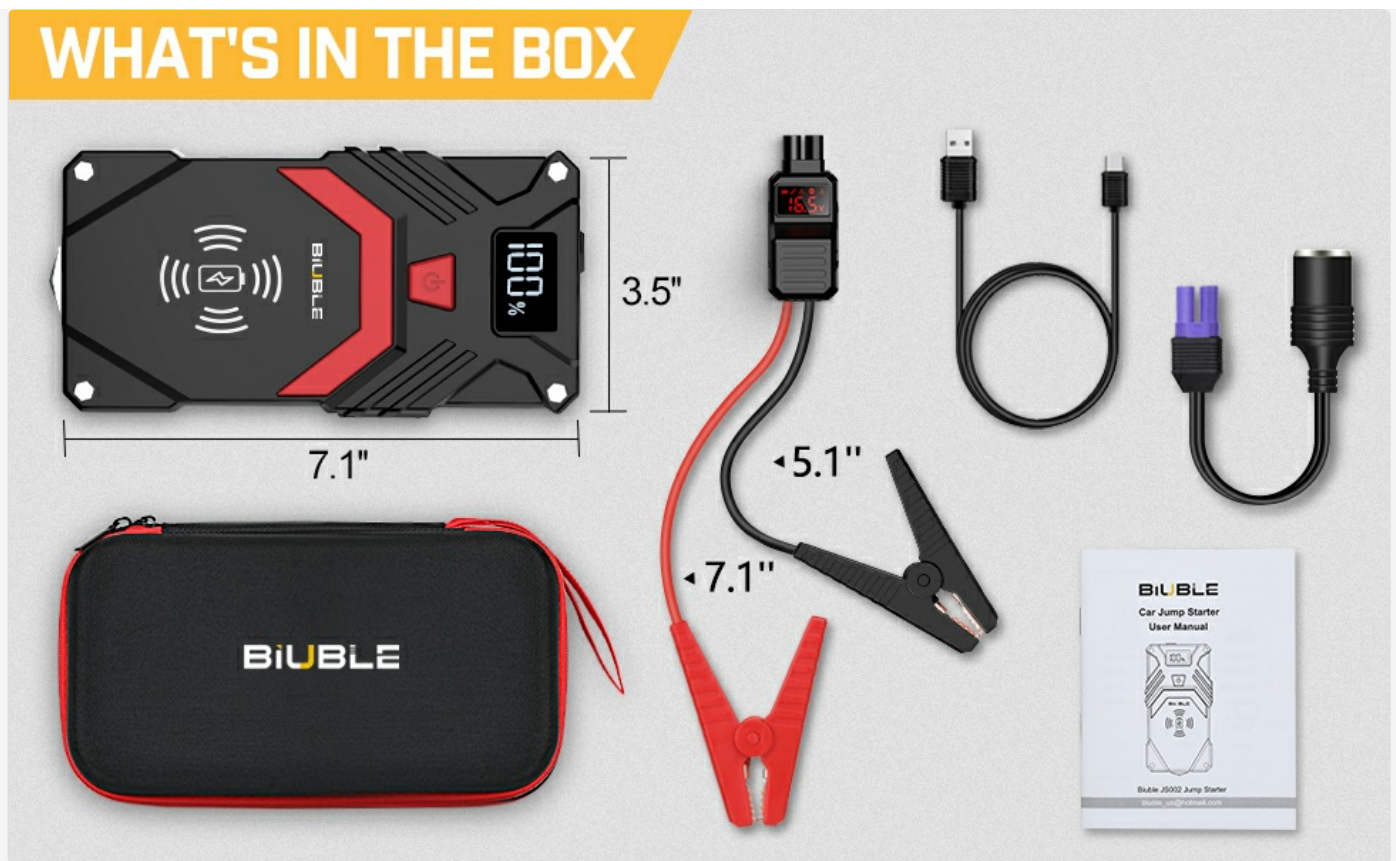


Image: A visual representation of the package contents, including the jump starter unit, smart jumper cables, USB Type-C charging cable, DC charger, and carrying case.

- 1 x BIUBLE Portable Car Jump Starter (Model: JS002)
- 1 x Smart Jumper Cable
- 1 x USB Type-C Charging Cable
- 1 x Exquisite Carrying Case
- 1 x DC Charger
- 1 x User Manual

SETUP AND INITIAL CHARGING

Before first use, it is recommended to fully charge the jump starter, even if the display indicates a high charge level. This ensures optimal battery performance and longevity.

1. **Charging the Unit:** Connect the provided USB Type-C charging cable to the jump starter's Type-C input port and plug the other end into a suitable USB power adapter (not included) or the DC charger. The digital LCD screen will display the charging progress.
2. **Battery Activation:** To prolong the lifespan of the portable jump starter's battery, recharge the unit every 2-3 months, especially if not in regular use.

STAY CHARGED UP TO 12 MONTHS

Active anytime without worry about losing charge during storage.



Image: The jump starter unit positioned in a car's console, highlighting its ability to stay charged for up to 12 months, ready for use.

OPERATING INSTRUCTIONS

Jump Starting a Vehicle

Ensure the jump starter has at least 25% charge before attempting to start a vehicle.

1. **Connect Smart Jumper Cable:** Insert the blue plug of the smart jumper cable into the jump start port on the BIUBLE JS002 unit.
2. **Attach Clamps to Battery:** Connect the red clamp to the positive (+) terminal of the vehicle's battery and the black clamp to the negative (-) terminal. Ensure a secure connection.
3. **Start Vehicle:** Once connected, the smart cable's indicator light will show readiness. Start your vehicle's engine. If the vehicle does not start immediately, wait 30 seconds and try again. Do not crank for more than 3 seconds per attempt.
4. **Remove Clamps:** After the vehicle starts, immediately remove the smart jumper clamps from the vehicle battery, then disconnect the smart jumper cable from the jump starter unit.

**EASY
TO
USE**



1. ATTACH CLAMPS



2. READY GO



3. START VEHICLE

Image: A visual guide demonstrating the three simple steps to jump start a vehicle using the BIUBLE JS002.

JUMP START DEAD BATTERY IN SECONDS



Image: The BIUBLE JS002 jump starter connected to a car battery, ready to provide power for starting.

Using as a Portable Power Bank

The JS002 features a 24000mAh capacity, allowing it to charge various electronic devices.

- **USB Charging:** It includes one standard USB port and one Quick Charge 3.0 USB port for rapid charging of smartphones, tablets, and other USB-powered devices.
- **10W Wireless Charging:** Place compatible devices on the wireless charging pad located on top of the unit to charge wirelessly.



Image: The BIUBLE JS002 unit demonstrating its 10W wireless charging capability for a smartphone, alongside wired charging for other devices via its USB ports.

Using the LED Emergency Flashlight

The built-in LED light offers four modes for various situations:

- **Lighting:** Standard illumination for general use.
- **Strobe:** Flashing light for signaling or disorientation.
- **SOS:** International Morse code signal for emergencies.
- **Warning:** A specific flashing pattern for caution.

LIGHT IT UP



Lighting



Strobe



SOS



Warning



Image: A person using the integrated LED flashlight of the BIUBLE JS002 to inspect a car engine, illustrating its utility in low-light conditions.

MAINTENANCE AND STORAGE

- **Regular Recharging:** Recharge the jump starter every 2-3 months to maintain battery health and prolong its lifespan, especially during periods of non-use.
- **Storage Conditions:** Store the unit in a cool, dry place away from direct sunlight and extreme temperatures. The rubber-covered molded case provides water, dust, and shatter resistance for durability.
- **Cleaning:** Use a soft, dry cloth to clean the unit. Do not use harsh chemicals or abrasive materials.

TROUBLESHOOTING AND SAFETY

The BIUBLE JS002 is equipped with smart safety protections to prevent common issues:

- **Spark-Proof:** Designed to prevent sparks during connection.

- **Reverse Polarity Protection:** Alerts and protects against incorrect positive/negative connections.
 - **Over-Temperature Protection:** Shuts down if the unit overheats.
 - **Short-Circuit Protection:** Prevents damage from short circuits.
 - **Low/High Voltage Protection:** Safeguards against voltage irregularities.
 - **Over-Charge/Over-Discharge Protection:** Manages battery charging and discharging cycles for longevity.
- If the vehicle does not start, check the connections to ensure they are secure and correct. If the smart cable indicates an error, refer to the smart cable's specific error codes (if any) or disconnect and reconnect the clamps.

SAFETY COMES FIRST



-  SPARK-PROOF
-  - 4°F / 60°F BEARING TEMPERATURE
-  AI SMART-CHIPS
-  REVERSE POLARITY PROTECTION

Image: An illustration highlighting the multiple safety features integrated into the BIUBLE JS002 jump starter and its smart cables, ensuring safe operation.

SPECIFICATIONS

Feature	Detail
---------	--------

Model	JS002
Peak Current	2500 Amps
Engine Compatibility	Up to All Gas or 8.0L Diesel Engines
Battery Capacity	24000mAh (as per feature bullets)
Wireless Charger Output	10W
USB Outputs	1 x Standard USB, 1 x Quick Charge 3.0 USB
Operating Temperature	-4°F to 140°F (-20°C to 60°C)
Dimensions (L x W x H)	10"D x 5.75"W x 3.94"H
Item Weight	12.3 ounces (approx. 350 Grams)

WARRANTY AND SUPPORT

BIUBLE provides comprehensive support for its products:

- **Warranty:** This product comes with a 2-Year Technical Support and Warranty.
- **Contact Support:** For any issues, questions, or technical assistance, please contact BIUBLE customer service. Refer to the contact information provided in your product packaging or on the official BIUBLE website.

© 2024 BIUBLE. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Answered questions about this manual

Why is my BIUBLE JS002 flashing '0' and failing to charge despite trying different cables and power sources?

If your BIUBLE JS002 is flashing "0" and will not charge despite trying multiple cables and power adapters, it typically indicates that the internal lithium battery has dropped below a critical voltage threshold (deep...

[Read full answer](#)