



Manuals.plus /

› Los Flexi /

› Los Flexi KBT21 21-Inch Tall Toilet Instruction Manual

Los Flexi KBT21

Los Flexi KBT21 21-Inch Tall Toilet Instruction Manual

Model: KBT21

INTRODUCTION

This manual provides detailed instructions for the installation, operation, maintenance, and troubleshooting of your new Los Flexi KBT21 21-Inch Tall Toilet. Please read this manual thoroughly before installation and use to ensure proper function and longevity of your product. Keep this manual for future reference.

Your browser does not support the video tag.

Video Description: An introductory video showcasing the Los Flexi Tall Toilet Collection, highlighting various heights including the 21-inch model. This video provides a general overview of the product line's design and comfort features.

Your browser does not support the video tag.

Video Description: A detailed video providing more information about the Los Flexi 21-inch tall toilet, focusing on its specific features and benefits for users seeking enhanced comfort and accessibility.

SAFETY INFORMATION

- Always turn off the main water supply before beginning any installation or maintenance.
- Wear appropriate personal protective equipment (PPE) such as gloves and eye protection during installation.
- Handle ceramic components with care to prevent chipping or breakage.
- Ensure all connections are tightened properly to prevent leaks, but do not overtighten.
- If you are unsure about any step, consult a qualified plumber.

PACKAGE CONTENTS

Verify that all components listed below are included in your package before beginning installation.

Dimension



ADA Compliant



Watersense Certified



MAP Premium Certified



Uniform Plumbing Code Certified



High Efficiency Toilet

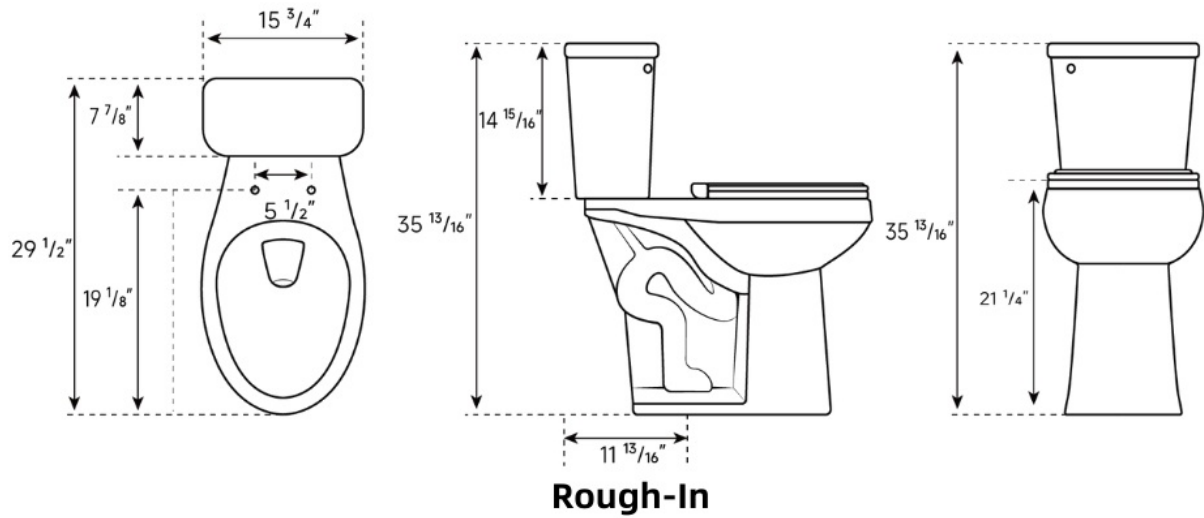


Image Description: A visual breakdown of the Los Flexi KBT21 toilet package contents, including the toilet bowl, pre-assembled tank, soft-close seat, wax ring, bolt kit, and seat installation kit.

- 21" Two-Piece Toilet Bowl
- Pre-assembled Toilet Tank
- Soft-Close Toilet Seat
- Wax Ring & Bolt Kit
- Toilet Seat Installation Kit

TOOLS AND MATERIALS REQUIRED (NOT SUPPLIED)

The following tools and materials are necessary for installation but are not included in the package:



Image Description: A visual guide to the tools and materials required for toilet installation, such as wrenches, screwdrivers, a hacksaw, level, and a water supply line.

- 10" (254mm) Adjustable Wrench
- 12" (305mm) Pipe Wrench
- Hacksaw
- Screwdriver
- Metal File (fine cut)
- Tape Measure
- Tubing Cutter
- Level
- Putty Knife
- Water Supply Line (if not reusing existing)

SETUP AND INSTALLATION

Follow these steps carefully for a successful installation of your Los Flexi KBT21 toilet.

Your browser does not support the video tag.

Video Description: A comprehensive installation guide for the Los Flexi Two-Piece Tall Toilet, demonstrating each step from preparation to final assembly and water connection.

Part 1: Preparation Before Starting

1. Turn off the main water supply to the bathroom.
2. Remove the old toilet (if applicable) and clean the flange area thoroughly.
3. Ensure the floor is clean and level where the new toilet will be installed.

Part 2: Install the Flange

1. Apply waterproof primer to the drain pipe and the flange.
2. Apply PVC cement to the drain pipe and the flange.
3. Insert the flange into the drain pipe.
4. Mark screw positions with a pencil and secure the flange with screws.
5. Measure and mark installation positions for T-bolts.
6. Insert T-bolts onto the flange and cover with metal washers.
7. Mark the position of T-bolts with tapes on both sides for alignment.

Part 3: Install the Toilet Bowl

1. Place the toilet bowl on a soft surface to prevent any damage.
2. Attach a wax ring to the toilet outlet.
3. Lift the bowl, align the two mounting holes with the flange bolts, and attach it to the flange.
4. Gently press to tightly connect the bowl to the flange.
5. Remove positioning tape on both sides.
6. Set a level on the toilet bowl to ensure it is level.
7. Place the plastic washer, metal washer, and nut onto the T-bolt, then tighten them.
8. If the T-bolt is too long, cut it to the appropriate length and cover with a cap.

Part 4: Install the Tank to the Bowl

1. Insert the cone washer and bolt through the tank hole.
2. Secure them with a washer and nut.
3. Screw the rubber gasket onto the flush valve nut.
4. Attach the toilet tank onto the bowl.
5. From the bottom, place the rubber washer, metal washer, and wing nut, then hand-tighten them.
6. Set a level on top of the tank to ensure it's level.
7. For the pre-assembled water tank, install the flush lever by inserting it through the tank hole, attaching a rubber fitting, and tightening by hand.
8. Attach the chain to the flush lever.
9. Finally, press the lever to confirm it flushes normally.

Part 5: Connect to the Water Supply

1. Connect the water supply line to the tank's fill valve nut. (Fits 7/8" water supply line).
2. If necessary, use the included 1/2" fill valve adapter for 1/2" water supply lines.
3. Connect to the water supply valve on the wall.
4. Tighten the water supply line with a wrench.
5. Turn on the water supply and let the tank fill with water.
6. Check if the tank gasket is leaking.
7. Confirm there is no leakage, then cover the tank lid.
8. Check for leaks with the water supply line and at the toilet-floor connection.
9. After ensuring no leaks, apply sealant where the toilet base meets the floor.

Part 6: Install the Toilet Seat

1. Insert the hinge bolt into the mounting hole and tighten with a power drill. Repeat for the other side.
2. Align the toilet seat with the hinge bolts.

3. Insert the seat and make final adjustments.
4. Fully tighten the bolts on both sides.
5. Remove the seat and cover the bolt caps first.
6. Then reinsert the seat to complete the toilet seat installation.

OPERATION

Flushing Mechanism

The Los Flexi KBT21 toilet features an efficient 1.28 GPF siphonic flush system. To flush, simply press down on the chrome flush lever located on the side of the tank. The powerful 360° jet siphonic action ensures a clean bowl with minimal water usage.

360° Jet Siphon Powerful Flushing




**Water-Saving Single Flush
Only 1.28 GPF**



**Full Glazed
Trapway**



**3" Flush
Flapper**

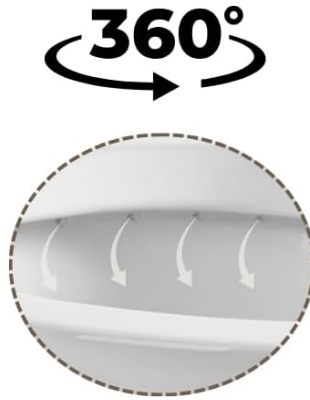

LOS FLEXI

Image Description: A visual representation of the 360° jet siphonic powerful flushing system in action, demonstrating its efficiency and water-saving capabilities (1.28 GPF).

Soft-Close Seat

The toilet is equipped with a soft-close seat and lid. This feature prevents slamming, reducing noise and

potential damage. To close, simply push the seat or lid down gently, and it will lower slowly and quietly on its own.

Soft-Close & High-Quality Seat



Anti-slip Pads



Premium PP Material



Perfect Fit



**1.28GPF
Single Flush**



**Soft Close
Seat**



**12" Rough-In
S-Trap**



**21" Extra
Height**



**Elongated
Bowl**

Image Description: The soft-close and high-quality seat feature, illustrating how the seat gently lowers without slamming, ensuring a quiet bathroom experience.

MAINTENANCE AND CARE

Regular cleaning and maintenance will keep your Los Flexi KBT21 toilet in optimal condition.

Cleaning Instructions

- Use a soft cloth and mild, non-abrasive cleaners for all surfaces.
- Avoid using harsh chemicals, abrasive pads, or cleaners containing bleach, as these can damage the ceramic glaze and seat material.
- For the soft-close seat, use the quick-release mechanism for easy removal and thorough cleaning.
- Clean the exterior of the toilet, including the base and tank, regularly.

This Extra Tall Toilet Will Be A Great Option For These Situation



Image Description: Close-up views highlighting the premium flush lever, elegant design, and smooth, high-gloss surface of the toilet, which facilitates easy cleaning and maintenance.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Toilet not flushing properly	Low water level in tank, clogged siphon jet, flush lever chain too loose/tight.	Adjust water level, clear siphon jet, adjust flush lever chain.
Continuous running water	Flapper not sealing, fill valve malfunction, flush lever stuck.	Check flapper for debris/wear, inspect fill valve, ensure flush lever moves freely.
Leaks at base of toilet	Loose T-bolts, damaged wax ring, cracked toilet base.	Tighten T-bolts, replace wax ring, consult plumber for cracks.
Slow tank refill	Partially closed water supply valve, clogged fill valve.	Fully open water supply valve, clean or replace fill valve.

SPECIFICATIONS



LOS FLEXI

Dimension

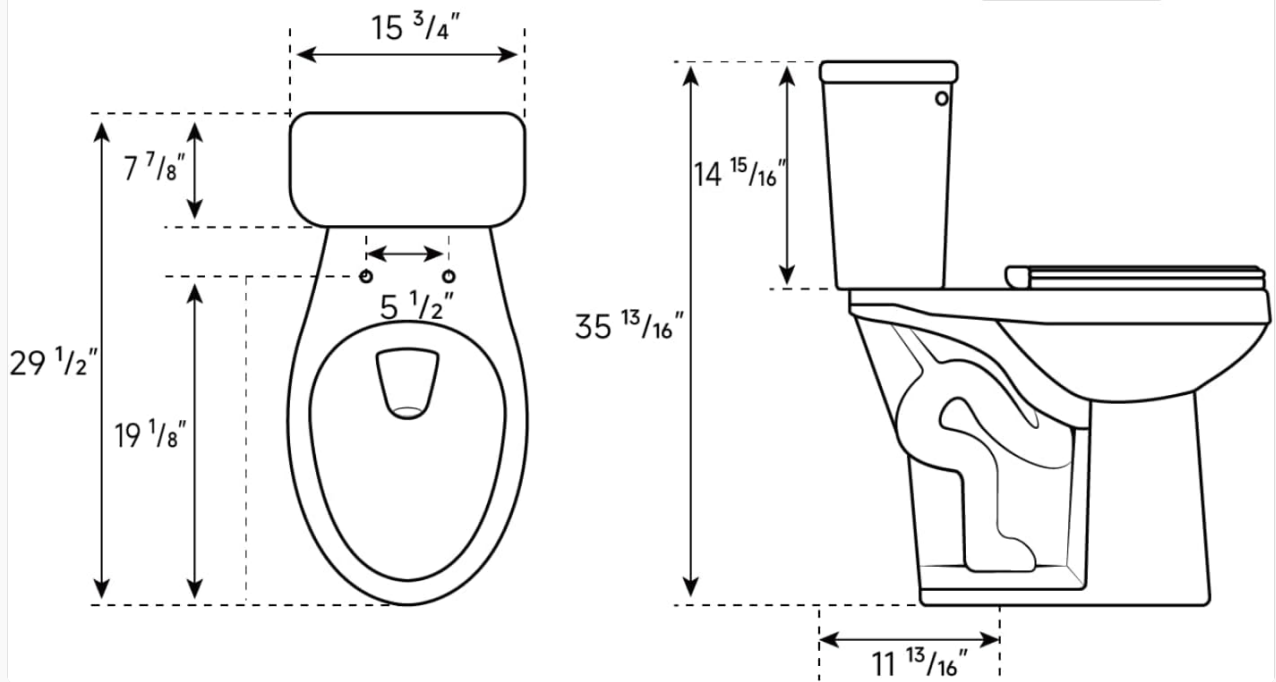


Image Description: A comprehensive diagram illustrating the dimensions of the Los Flexi KBT21 toilet from multiple angles, including height, depth, width, and rough-in measurements.

Feature	Detail
Model Number	KBT21
Color	White
Product Dimensions (D x W x H)	29.13" x 15.75" x 36.22"
Material	Ceramic, Polypropylene (PP)
Item Weight	88.5 Pounds
Installation Type	Floor Mounted
Shape	Elongated Oval
Seat Material Type	Polypropylene (PP)
Flush Type	Siphonic Flush (1.28 GPF)
Rough-In	12 inches
Seat Height	21 inches
Water Supply Line Compatibility	1/2" & 7/8" (adapter included for 1/2")

Package Includes

All necessary mounting accessories are provided for hassle-free installation

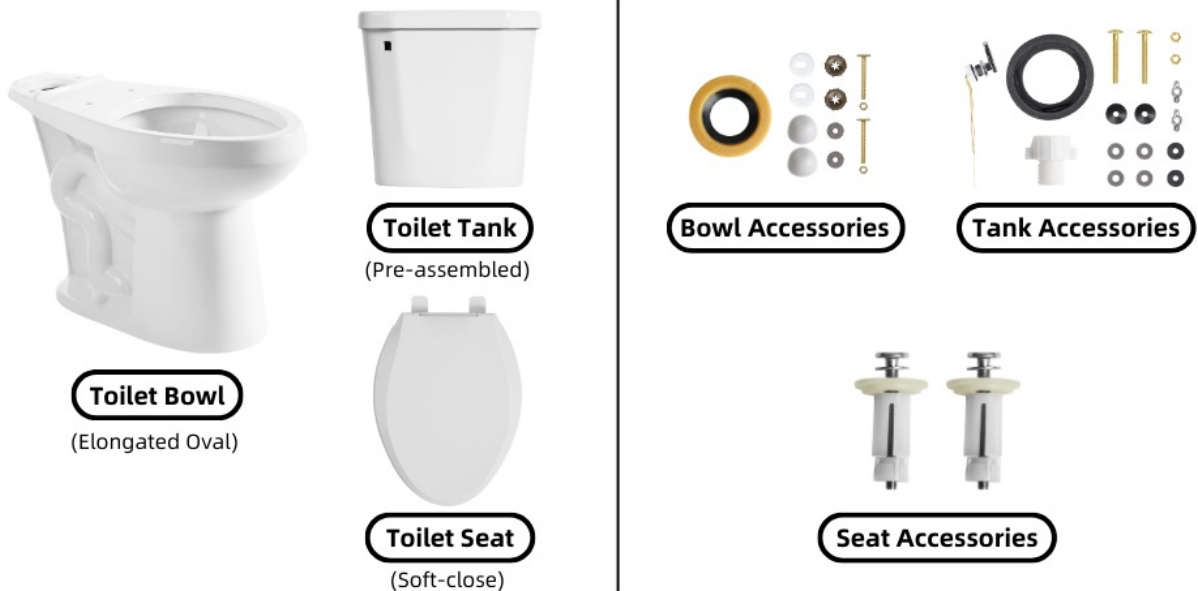


Image Description: This image displays the various certifications for the Los Flexi KBT21 toilet, including ADA Compliant, WaterSense Certified, MaP Premium Certified, Uniform Plumbing Code Certified, and HET (High Efficiency Toilet), ensuring quality and compliance.

WARRANTY AND SUPPORT

Warranty Information

Your Los Flexi KBT21 toilet is backed by a **2-year warranty** from the date of purchase. This warranty covers manufacturing defects in materials and workmanship under normal use and service. Please retain your proof of purchase for warranty claims.

Customer Support

For any questions, assistance with installation, or warranty claims, please contact our dedicated customer support team. We are committed to ensuring your satisfaction and providing long-lasting comfort with every use. Contact information can be found on our official website or through your retailer.