

[manuals.plus](#) /

› [KUZOR](#) /

› [KUZOR AZ-3022-MB 304 Stainless Steel Bathroom Faucet Instruction Manual](#)

## **KUZOR AZ-3022-MB**

# **KUZOR AZ-3022-MB 304 Stainless Steel Bathroom Faucet Instruction Manual**

Model: AZ-3022-MB | Brand: KUZOR

## **INTRODUCTION**

This manual provides detailed instructions for the installation, operation, and maintenance of your KUZOR AZ-3022-MB 304 Stainless Steel Bathroom Faucet. Please read this manual thoroughly before beginning installation to ensure proper function and longevity of your product.



Image: The KUZOR AZ-3022-MB Matte Black Bathroom Faucet, showcasing its sleek design, accompanying deck plate, and pop-up drain.

## PACKAGE CONTENTS

Verify that all components are present before beginning installation. If any parts are missing or damaged, please contact customer service.

- 1PC Bathroom Sink Faucet (with detachable spout)
- Plastic Pop-Up Drain
- Water Hoses (23.6 inches, 1/2-Inch Collet, Standard 3/8" compression threads)
- 6.3-inch Deck Plate
- Fixing Part
- Installation Instruction Manual



Image: An illustration showing all included components of the KUZOR faucet package, including the faucet body, hot and cold water supply hoses, fixing part, pop-up drain, and deck plate.

## PRODUCT SPECIFICATIONS


Feature	Specification
Brand	KUZOR
Model Name	AZ-3022-MB
Material	304 Stainless Steel
Finish Type	Matte Black
Mounting Type	Deck Mount, Single Hole Installation
Number of Handles	1
Faucet Height	5.91 inches
Spout Height	3.94 Inches
Spout Reach	2.17 Inches
Hose Length	23.6 Inches
Item Weight	3.3 pounds
Maximum Flow Rate	4.32 Gallons Per Minute
Special Features	Easy to Install, Pop Up Drain, Ceramic Cartridge




With Overflow



#### Deck Plate is Included



✓ 3 Hole




✓ 1 Hole

#### Pre-drilled hole size requirement:



1.30 inch(min) - 1.42 inch(max)

#### Max counter top thickness:



1.18 inch

Image: A detailed diagram illustrating the dimensions of the KUZOR faucet and the required sink hole size and countertop thickness for installation.

## SETUP AND INSTALLATION

Follow these steps for a smooth installation. It is recommended to have basic plumbing tools available.

### Pre-Installation Checklist:

- Ensure water supply is turned off at the main valve.
- Clear the area under the sink for easy access.
- Verify sink hole size: 1.30 inch (min) - 1.42 inch (max).
- Maximum countertop thickness: 1.18 inch.

## Installation Steps:

- Prepare the Faucet:** If your sink has three holes, place the 6.3-inch deck plate over the holes. Insert the faucet body through the center hole (or single hole if applicable).
- Secure the Faucet:** From underneath the sink, thread the fixing part onto the faucet's shank. Hand-tighten, then use a wrench to secure it firmly, ensuring the faucet is stable and centered.
- Connect Water Hoses:** Attach the hot and cold water supply hoses (23.6 inches) to the corresponding inlets on the faucet and to your water supply lines. Ensure connections are tight to prevent leaks. The hoses feature standard 3/8" compression threads.
- Install Pop-Up Drain:** Follow the instructions provided with the plastic pop-up drain for proper installation into your sink's drain opening. Ensure a watertight seal.
- Test for Leaks:** Once all connections are made, slowly turn on the main water supply. Check all connections for any signs of leaks. Operate the faucet to ensure proper water flow and temperature control.

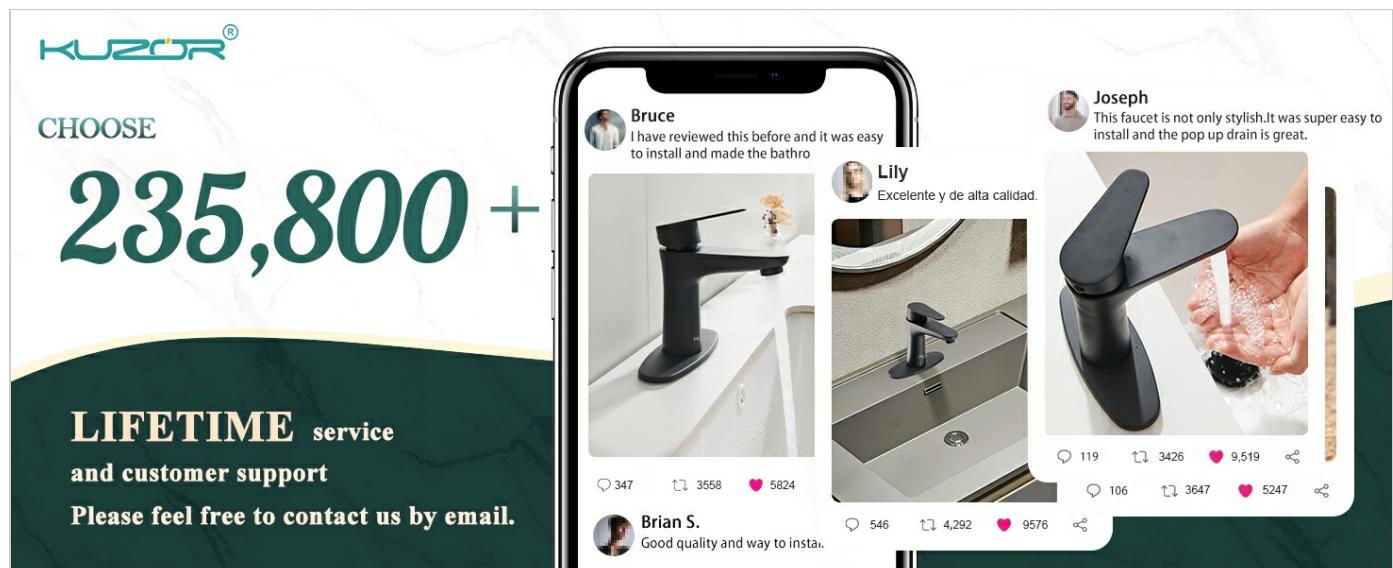


Image: A visual guide demonstrating the pre-installation process, including connecting hoses and securing the faucet.

## Installation Video:

Your browser does not support the video tag.

Video: An official KUZOR video demonstrating the installation and basic operation of the bathroom faucet, including water flow and pop-up drain function.

## OPERATING INSTRUCTIONS

The KUZOR AZ-3022-MB faucet features a single handle for easy control of water flow and temperature, and a convenient pop-up drain.

- Water Flow Control:** Lift the handle upwards to turn on the water and increase flow. Push the handle downwards to turn off the water.
- Temperature Control:** Move the handle to the left for hot water and to the right for cold water. Adjust the position between left and right to achieve the desired water temperature.

- **Pop-Up Drain:** Press the top of the pop-up drain to close it and retain water in the sink. Press it again to open the drain and allow water to flow out.

# Elegant Faucet



## Modern & Sleek



Matte Black



Premium Brass with 304 SS Body



Image: The KUZOR faucet in use, demonstrating a steady stream of water from the spout.

## MAINTENANCE


Regular cleaning and maintenance will help preserve the finish and functionality of your faucet.

- **Cleaning the Finish:** Clean the matte black finish with a soft, damp cloth and mild soap. Avoid abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the finish.
- **Aerator Maintenance:** The faucet features a detachable aerator for easy cleaning. Periodically unscrew the aerator from the spout and rinse any debris or mineral buildup under running water. Reattach securely.
- **Pop-Up Drain Cleaning:** The pop-up drain has a built-in strainer to prevent dirt and hair from clogging. Regularly remove and clean the strainer to maintain proper drainage.

# OUR ADVANTAGE

Detachable  
Easy to clean

Free Operation  
Handle

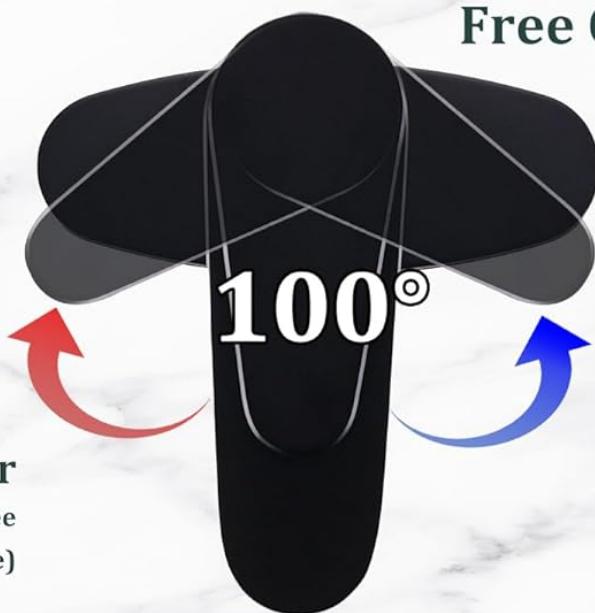

**Eco-Friendly Aerator**  
Provides a steady and splash-free  
stream (1.2 GPM Flow Rate)



## PLASTICS POP UP DRAIN

Build-in Strainer  
Prevent dirt, hair, ring from  
clogging up



Image: An illustration highlighting the detachable aerator for easy cleaning and the pop-up drain with its built-in strainer to prevent clogs.

## TROUBLESHOOTING

If you encounter any issues with your faucet, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Low Water Flow	Clogged aerator; partially closed shut-off valve; debris in water lines.	Clean the aerator. Ensure shut-off valves are fully open. Flush water lines.
Leaks from Faucet Base	Loose mounting nut; worn O-rings.	Tighten the mounting nut under the sink. Inspect and replace O-rings if necessary.
Dripping Faucet	Worn ceramic cartridge.	Contact customer service for a replacement ceramic cartridge.
Stiff Handle Operation	Mineral buildup in cartridge; worn cartridge.	Flush the cartridge with water. If problem persists, contact customer service for a replacement cartridge.

UP TO  
**800K**  
OPEN / CLOSE TEST

KUZOR®

**Leak-proof**

**CERAMIC  
CARTRIDGES**



Image: A cutaway view of the KUZOR faucet, illustrating the internal ceramic cartridge responsible for leak-proof operation and durability.

## WARRANTY AND CUSTOMER SUPPORT

KUZOR provides a 180-day warranty on this product. If you encounter any issues with the faucet's quality or installation, or require assistance with troubleshooting, our customer service team is available to assist you promptly and efficiently. For support, please refer to the contact information provided in your product packaging or visit the official KUZOR website.

© 2025 KUZOR. All rights reserved.