Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

EMKE ULM13ATDSX1

EMKE Backlit Illuminated Bathroom Mirror ULM13ATDSX1 User Manual

Model: ULM13ATDSX1 | Dimensions: 500x700 mm (19.7"W x 27.6"L)

1. Introduction

This manual provides essential information for the safe installation, operation, and maintenance of your EMKE Backlit Illuminated Bathroom Mirror. Please read these instructions thoroughly before installation and retain them for future reference.

The EMKE LED bathroom mirror is designed to enhance your bathroom experience with features such as LED lighting, a touch switch, a demister pad, a shaver socket, and a 3x magnifier. It is constructed with a 5mm environmentally friendly bronze-free mirror, durable crystal glass, polished edges, and an aluminum frame.



Figure 1: EMKE Backlit Illuminated Bathroom Mirror. This image displays the rectangular mirror with its integrated LED backlighting and touch controls, mounted above a modern sink.

2. Safety Information

Important: Handle the mirror with extreme care due to its fragile nature. Always use caution during installation and handling. Be aware of potentially sharp edges.

- Ensure the power supply is disconnected before any installation or maintenance work.
- Installation should be performed by a qualified electrician in accordance with local wiring regulations.
- Do not expose the mirror to excessive moisture or direct water spray.
- Keep children away from the installation area.
- Do not attempt to modify or repair the mirror yourself. Contact qualified personnel for service.

3. Package Contents

Verify that all components are present and undamaged before beginning installation.

- 1 x EMKE LED Bathroom Mirror
- 1 x User Manual (this document)
- 1 (set) x Screw Accessory (mirror bracket, screws, and dowels)

4. Setup and Installation

The mirror is designed for vertical wall mounting. Ensure the chosen wall can support the mirror's weight (approximately 7.6 kg / 16.72 lbs).

1. **Preparation:**
    - Turn off the main power supply to the installation area.
    - Carefully unpack the mirror and inspect for any damage.
    - Determine the desired mounting height and position.
2. **Marking:**
    - Hold the mirror against the wall at the desired position and mark the locations for the mounting brackets.
    - Ensure marks are level using a spirit level.
3. **Drilling:**
    - Drill holes at the marked locations using an appropriate drill bit for your wall type.
    - Insert the provided wall dowels into the drilled holes.
4. **Mounting Brackets:**
    - Secure the mirror brackets to the wall using the provided screws. Ensure they are firmly attached.
5. **Electrical Connection:**
    - Connect the mirror's electrical wiring to your household electrical supply. This connection should be made by a qualified electrician.
    - Ensure all connections are secure and insulated.
6. **Hanging the Mirror:**
    - Carefully lift the mirror and align its hanging points with the wall brackets.
    - Gently lower the mirror onto the brackets, ensuring it is securely seated.
7. **Final Check:**
    - Once the mirror is securely mounted and wired, restore power to the circuit.
    - Test all functions of the mirror.

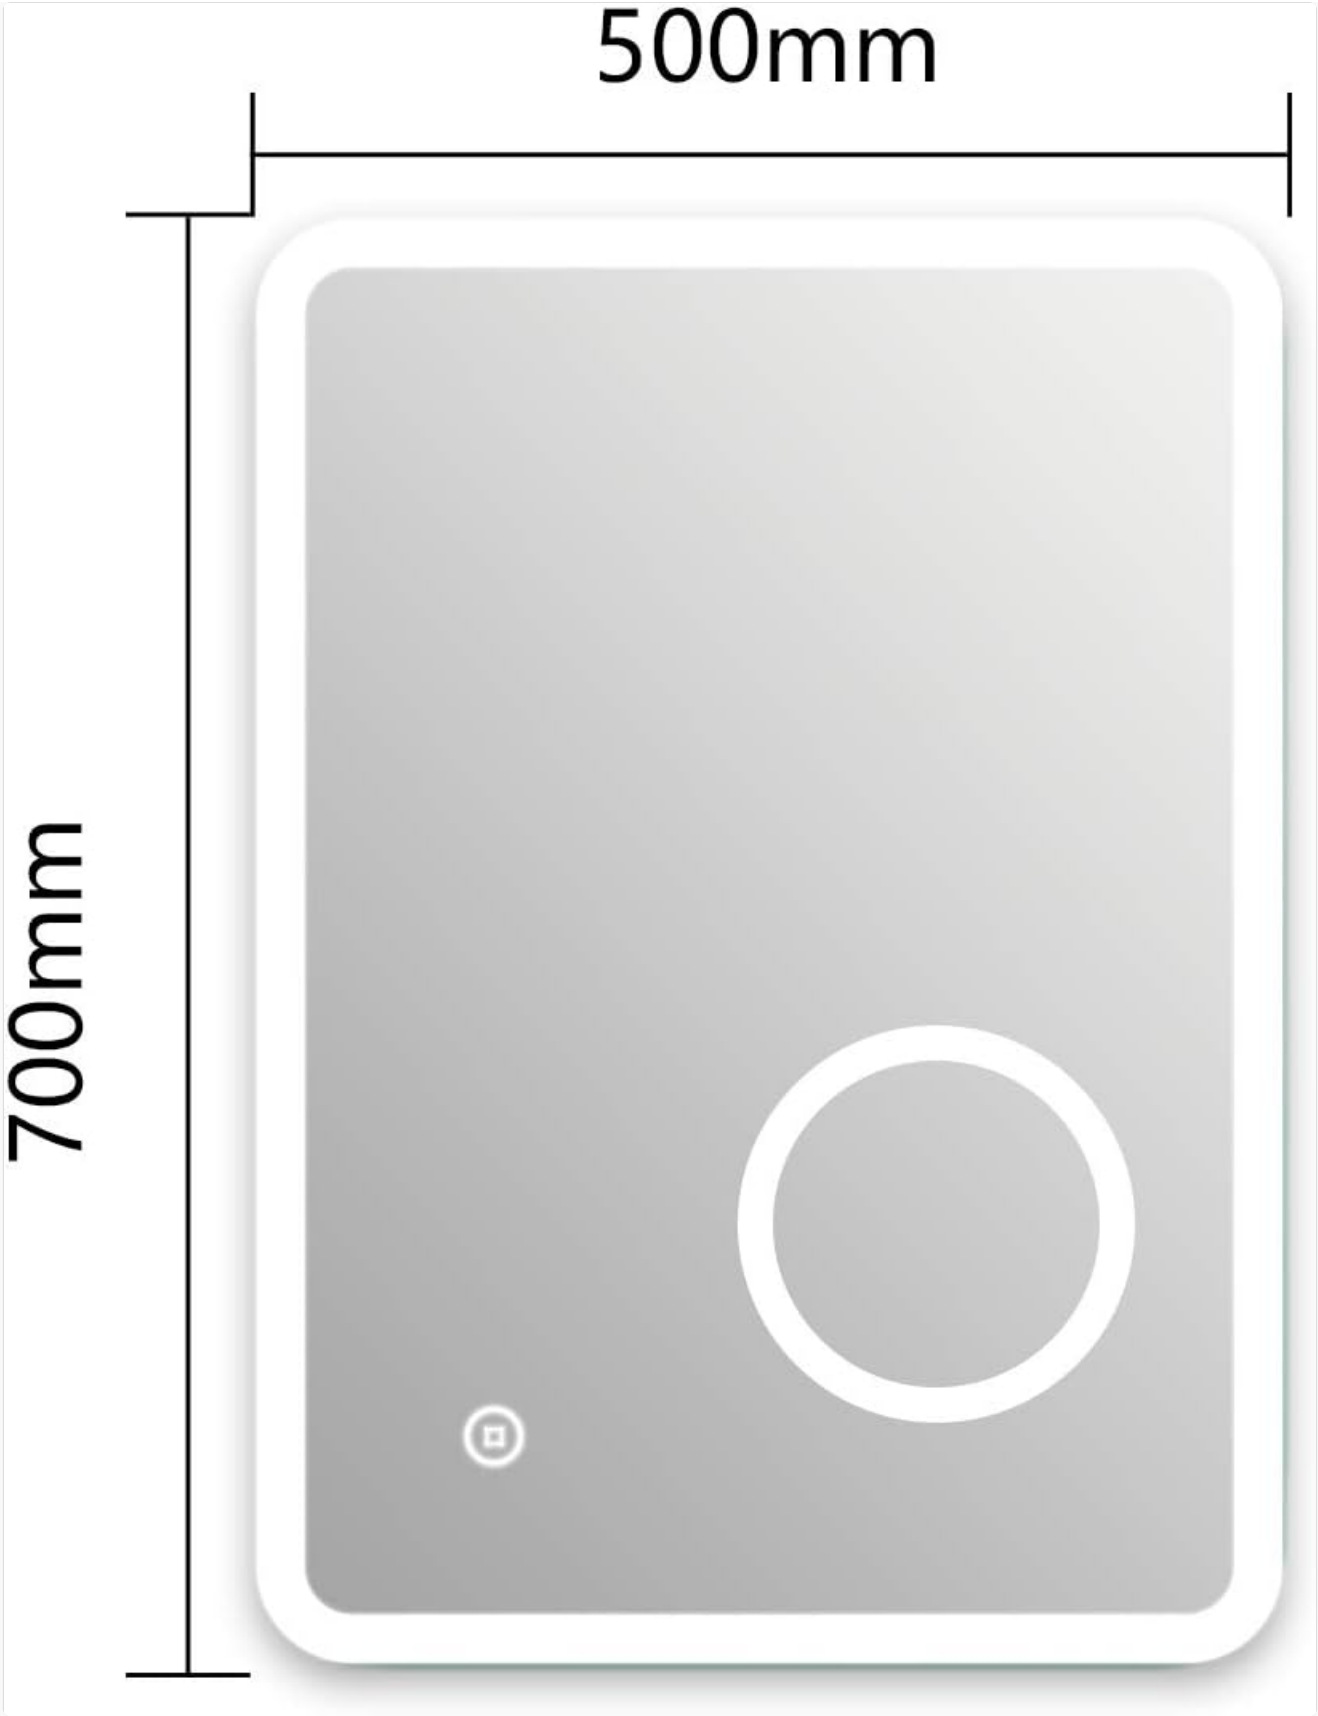


Figure 2: Mirror Dimensions. This image illustrates the overall dimensions of the mirror, showing a width of 500mm and a height of 700mm.

5. Operating Instructions

Your EMKE mirror features intuitive touch controls and integrated functionalities.

5.1. LED Lighting and Demister Function

- The mirror is equipped with energy-saving LED diodes (Energy class A++).

- To turn the LED lighting **ON** or **OFF**, gently double-touch the designated touch switch on the mirror surface.
- The anti-fog (demister) function activates automatically when the LED light is switched on. This helps maintain a clear reflection by preventing steam buildup.



Figure 3: Smart Touch Control. This image demonstrates the touch switch on the mirror surface, indicating how to turn the LED light and demister function on and off with a double touch.



Figure 4: Demister Pad. This image visually represents the anti-fog function, showing steam clearing from the mirror surface, ensuring a clear reflection.

5.2. Shaver Socket

- An independent shaver socket is integrated into the mirror's design.
- This socket is suitable for charging 2-pin powered appliances such as electric shavers and toothbrushes.
- Ensure the appliance is compatible with the socket's voltage and current ratings.

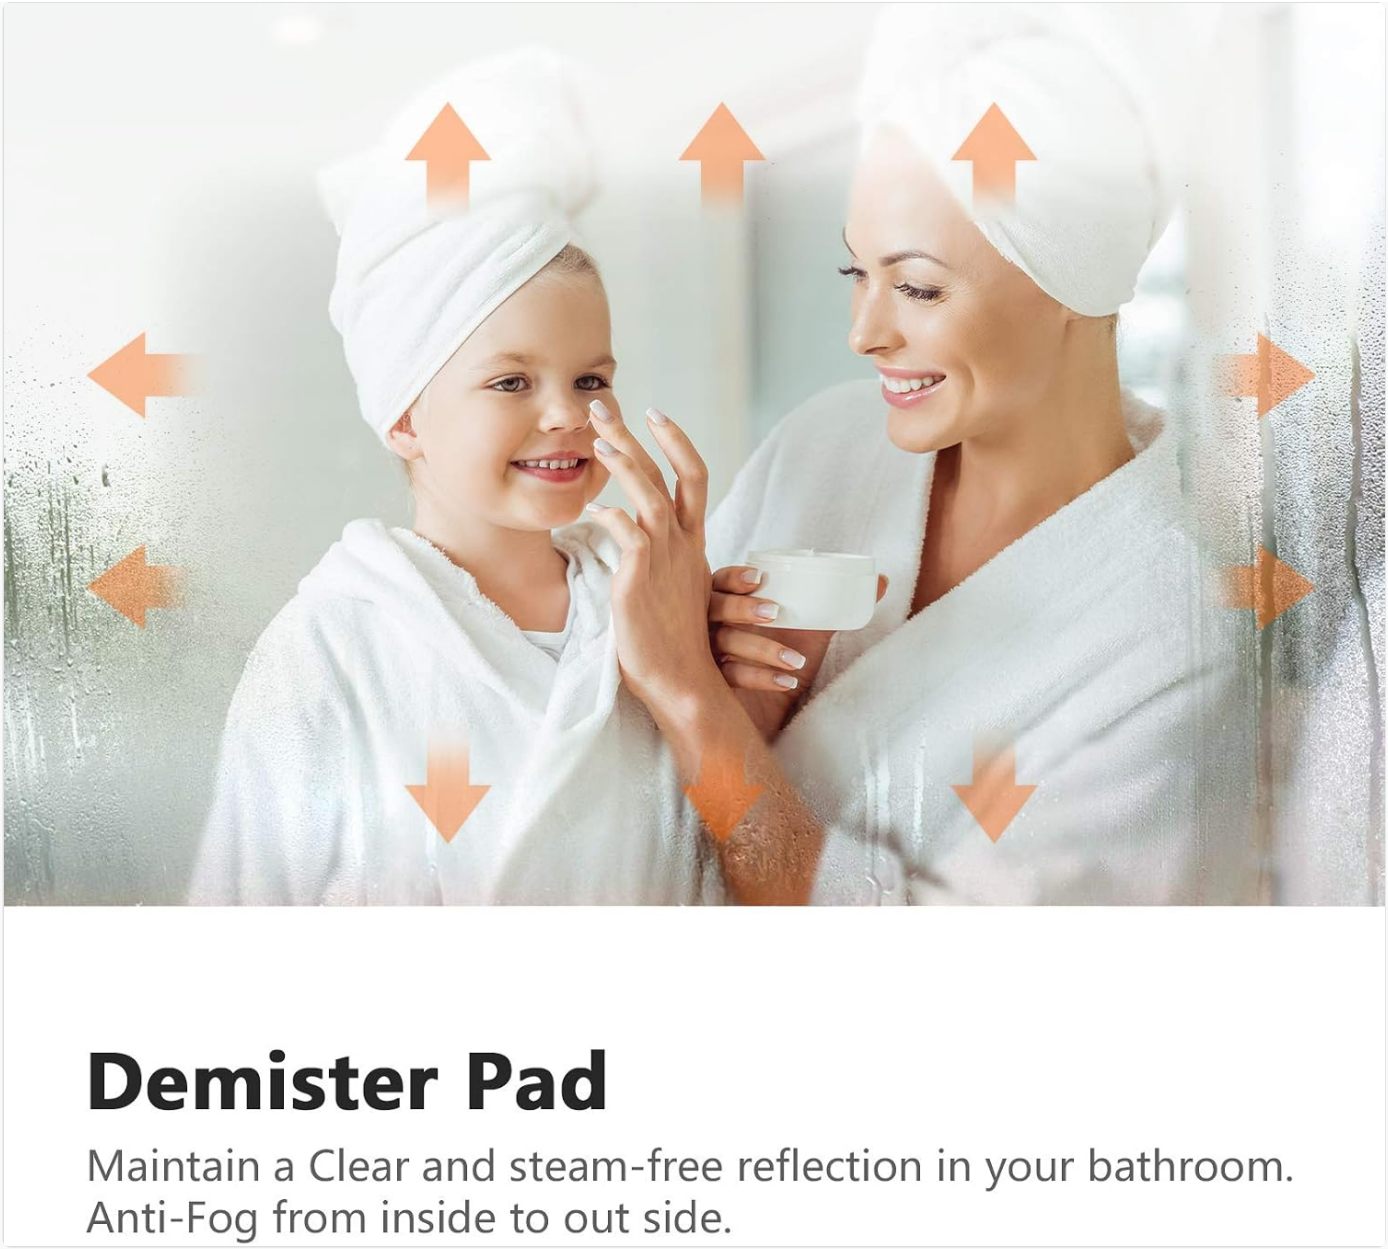


Figure 5: Shaver Socket. This image shows the integrated shaver socket on the side of the mirror, with examples of a shaver and electric toothbrush being charged.

5.3. 3x Magnifier

- The mirror includes a built-in 3x magnifying section.
- This feature is designed for detailed tasks such as makeup application, shaving, or precise grooming.



Figure 6: 3x Magnification. This image highlights the integrated 3x magnifying area on the mirror, showing its utility for detailed tasks like applying makeup.

6. Maintenance

Proper maintenance ensures the longevity and optimal performance of your mirror.

- **Cleaning:** Use a soft, damp cloth and a mild, non-abrasive glass cleaner to clean the mirror surface. Avoid harsh chemicals or abrasive materials that could damage the mirror or its coating.
- **Frame Care:** The aluminum frame can be wiped clean with a soft, dry cloth.
- **Electrical Components:** Ensure the mirror is disconnected from the power supply before cleaning any electrical components or the shaver socket area.
- **Inspection:** Periodically check the mounting hardware for tightness and ensure all electrical connections remain secure.

7. Troubleshooting

If you encounter issues with your EMKE mirror, refer to the following common troubleshooting steps:

Problem	Possible Cause	Solution
LED lights do not turn on.	No power supply; loose connection; faulty touch switch.	Check the main power supply. Ensure electrical connections are secure. Double-touch the switch firmly. If the issue persists, contact support.
Demister function not working.	LED lights are off; demister element malfunction.	Ensure the LED lights are switched on, as the demister activates with the lights. If lights are on and demister is not working, contact support.
Shaver socket not providing power.	No power supply; appliance incompatibility; internal wiring issue.	Check the main power supply. Verify your appliance is compatible. Test with another 2-pin appliance. If still no power, contact support.

For issues not covered here, or if troubleshooting steps do not resolve the problem, please contact EMKE customer support.

8. Specifications

Feature	Detail
Brand	EMKE
Model Number	ULM13ATDSX1
Product Dimensions (W x H x D)	500 x 700 x 35 mm (19.7"W x 27.6"L x 1.4"D)
Material	5mm Bronze-free Crystal Glass, Aluminum Frame
Mounting Type	Wall Mount (Vertical)
Special Features	LED Lighting, Touch Switch, Demister Pad, 3x Magnifier, Shaver Socket
LED Lifespan	50,000 hours
Energy Class	A++
Item Weight	7.6 Kilograms (16.72 pounds)
Assembly Required	No (Installation required)

9. Warranty and Support

EMKE products are designed for quality and durability. The mirror is well-packaged to prevent damage during transit. As mirrors are fragile products, if you have any questions, concerns, or require assistance, please do not hesitate to contact EMKE customer support through your purchase platform (e.g., Amazon message system). We are committed to providing a proper solution promptly.

For the most up-to-date warranty information and support contact details, please refer to the official EMKE website or your purchase documentation.

© 2023 EMKE. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B08VS5FFMT

More documents and user manuals: **https://manuals.plus/**