

FLEXISPOT B08WXFMPQQ

FLEXISPOT Comhar Electric Standing Desk (Model B08WXFMPQQ) User Manual

Your guide to assembly, operation, and maintenance.

1. INTRODUCTION

This manual provides essential instructions for the assembly, operation, and care of your FLEXISPOT Comhar Electric Standing Desk. Please read this manual thoroughly before assembly and use to ensure proper function and safety. Keep this manual for future reference.



Image: The FLEXISPOT Comhar Electric Standing Desk, featuring a bamboo-look desktop, black frame, integrated drawer, and control panel with USB ports.

2. SAFETY INFORMATION

- Always ensure the desk is properly assembled and anchored.
- Do not exceed the maximum weight limit of 100 lbs (45 kg).
- Exercise caution when adjusting the desk height to prevent injury or damage to objects.
- Keep children and pets away from the desk during operation.
- Ensure all cables are properly managed to avoid entanglement during height adjustments.
- Do not place liquids directly on the control panel or near electrical components.

3. PACKAGE CONTENTS

Verify that all components are present before beginning assembly:

- Desktop (Bamboo-Look Laminate)
- Adjustable Frame (Black)
- Electric Motor Lift Mechanism
- Integrated Storage Drawer
- Control Panel with USB Charge Ports (Type-A and Type-C)
- Assembly Hardware (screws, Allen wrench)
- Instruction Manual (this document)

4. ASSEMBLY INSTRUCTIONS

The FLEXISPOT Comhar Electric Standing Desk is designed for easy assembly. The tabletop comes as a single piece, simplifying the process. Follow these steps carefully:

4.1. Frame Assembly

1. Unpack all components and lay them out on a clean, soft surface to prevent scratches.
2. Attach the drive rod to the motor and the opposite leg. Ensure the bolt is loose enough to rotate the drive rod if needed for proper fit, but do not rotate over 60 degrees.
3. Connect the two leg frames using the crossbar. Ensure the pilot holes align with the bulges on the columns. Secure with screws.
4. Attach the desk feet to the bottom of the leg columns. Pay attention to the direction of the desk feet; the long side should face the front.

Your browser does not support the video tag.

Video: FLEXISPOT ET156W-C Installation Guide. This video demonstrates the assembly process for the desk frame and attachment to the desktop.

4.2. Attaching Desktop and Wiring

1. Carefully place the assembled frame onto the underside of the desktop. Align the screw holes.
2. Secure the frame to the desktop using the provided screws and tools.
3. Install the adaptor holder onto the beam, next to the motor, ensuring the narrow side faces the motor.
4. Connect all necessary cables: the motor cable, control panel cable, and power cable. Ensure secure connections. Use cable management clips if provided to keep wires tidy.

Desk dimensions

Easy to Assemble in 3 Parts



Image: Diagram illustrating the desk dimensions (47.4" x 23.8") and key components: Desktop, Desk frame, and Desk feet.

SMART CONTROL PANEL

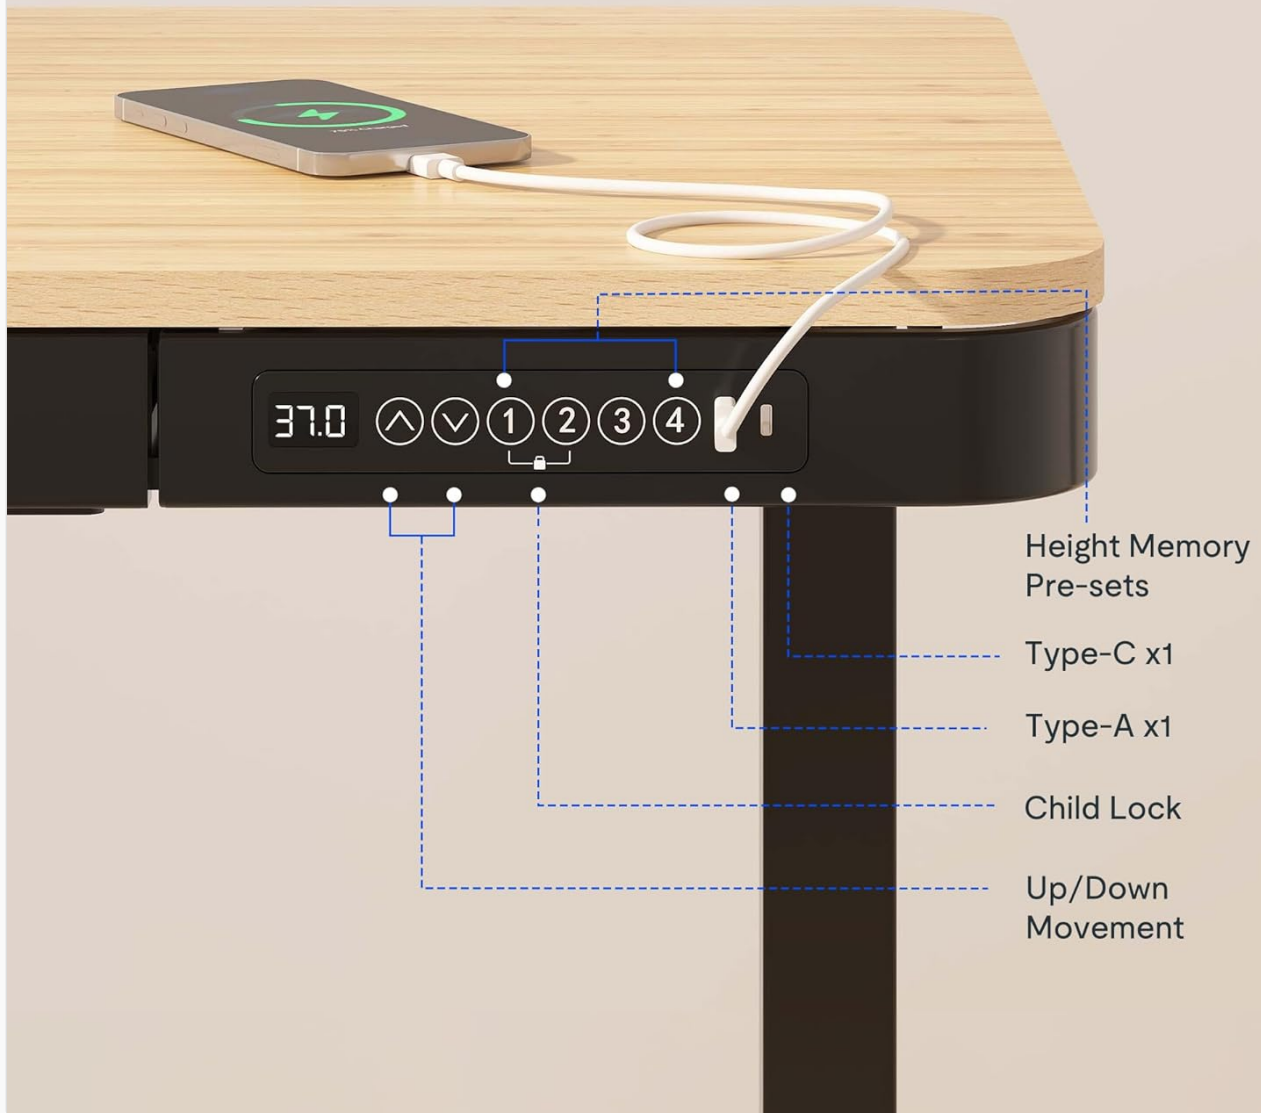


Image: Close-up of the smart control panel, highlighting height memory presets (1, 2, 3, 4), Type-C and Type-A USB ports, child lock, and up/down movement buttons.

5. OPERATING INSTRUCTIONS

5.1. Electric Height Adjustment

The desk features a robust motor for smooth height transitions. Use the up and down arrow buttons on the control panel to adjust the desk height between 28.9 inches and 46.5 inches.

LARGE ADJUSTMENT RANGE

Perfect size for your home office



Image: Visual representation of the desk's height adjustment range, from a minimum of 28.9 inches to a maximum of 46.5 inches.

5.2. Programmable Height Presets

The control panel includes four programmable height presets (1, 2, 3, 4). To save a desired height:

1. Adjust the desk to your preferred height using the up/down arrows.
2. Press the 'M' button, then press the desired number button (1, 2, 3, or 4) to save the current height.
3. To recall a saved height, simply press the corresponding number button.

5.3. USB Charge Ports

The integrated USB ports (Type-A and Type-C) allow you to charge up to three devices. Note that USB ports may temporarily pause charging while the desk height is being adjusted.

5.4. Anti-Collision Technology

The desk is equipped with an anti-collision feature. If an obstacle is detected during height adjustment, the desk will automatically stop and reverse slightly to prevent damage.



Image: The desk's anti-collision feature is demonstrated, showing the desk stopping and reversing upon encountering an obstacle.

6. MAINTENANCE

- Regularly inspect all screws and connections to ensure they are tight.
- Clean the desktop surface with a soft, damp cloth. Avoid abrasive cleaners or harsh chemicals.
- Keep the motor and electrical components free from dust and moisture.
- Do not attempt to disassemble or repair the motor or control unit yourself. Contact customer support for assistance.

7. TROUBLESHOOTING

| Problem | Possible Cause | Solution |
|--|---|---|
| Desk does not move. | Power cable disconnected, motor cable loose, control panel issue. | Check all cable connections. Ensure power is supplied. Reset the desk by unplugging for 30 seconds and plugging back in. |
| Desk moves unevenly or makes unusual noises. | Uneven load, loose screws, obstruction. | Distribute weight evenly on the desktop. Check for loose screws and tighten. Ensure no objects are obstructing the legs. |
| USB ports not charging. | Desk is adjusting height, cable issue, device incompatibility. | Charging pauses during height adjustment; wait for movement to stop. Check USB cables. Ensure device supports USB charging. |
| Anti-collision feature triggers frequently. | Obstacles in the path of movement. | Clear the area around the desk legs and under the desktop. |

8. SPECIFICATIONS

| Feature | Detail |
|---------|-----------|
| Brand | FLEXISPOT |

| Feature | Detail |
|-------------------------------|--|
| Model Number | B08WXFMPQQ |
| Product Dimensions | 47.3"D x 23.7"W x 47.6"H |
| Color | Bamboo Texture/Black |
| Style | Modern |
| Base Material | Metal |
| Finish Type | Powder Coated |
| Special Feature | Adjustable Height |
| Recommended Uses | Working |
| Included Components | Built-in USB Port |
| Maximum Weight Recommendation | 242 Pounds (Note: Feature bullets state 100 lbs, using the higher spec from detailed specifications) |
| Warranty Type | Limited |
| Required Assembly | Yes |
| Includes All Assembly Tools | Yes |
| Number of Drawers | 1 |
| Tabletop Thickness | 2.6 Inches |
| Maximum Height | 120.9 Centimeters (47.6 inches) |
| Minimum Height | 23.6 Inches |
| Is Electric | Yes |


9. WARRANTY AND SUPPORT

This FLEXISPOT Comhar Electric Standing Desk comes with a Limited Warranty. For specific warranty details, claims, or technical support, please refer to the warranty card included with your product or visit the official FLEXISPOT website.

For further assistance, you may contact FLEXISPOT customer support directly.






© 2023 FLEXISPOT. All rights reserved.

Related Documents - B08WXFMPQQ



[FlexiSpot E2Q Electric Standing Desk: Installation Guide and Specifications](#)

Comprehensive installation guide and specifications for the FlexiSpot E2Q electric standing desk. Learn how to assemble, operate, and troubleshoot your adjustable height desk.

| | |
|---|--|
|  | <p>FlexiSpot EH1-EU Electric Standing Desk Frame User Manual</p> <p>Comprehensive user manual for the FlexiSpot EH1-EU electric standing desk frame, detailing specifications, assembly instructions, wiring, operation, and troubleshooting for optimal use.</p> |
|  | <p>FlexiSpot E7QB 4-Leg Standing Desk Frame User Manual and Warranty</p> <p>Comprehensive user manual for the FlexiSpot E7QB 4-Leg Standing Desk Frame, covering installation, usage, troubleshooting, and warranty information. Learn how to assemble, operate, and maintain your adjustable desk.</p> |
|  | <p>FlexiSpot EG8B/EG8W Installation Guide and Limited Warranty</p> <p>This document provides a comprehensive installation guide and limited warranty information for the FlexiSpot EG8B/EG8W adjustable standing desk. It details specifications, assembly steps, keypad operation, troubleshooting, safety precautions, and warranty terms.</p> |
|  | <p>FlexiSpot EC1 Electric Height Adjustable Standing Desk Assembly Guide</p> <p>This assembly guide provides step-by-step instructions for setting up the FlexiSpot EC1 electric height-adjustable standing desk. It includes specifications, parts list, assembly procedures, keypad operation, troubleshooting tips, and warranty information.</p> |
|  | <p>FlexiSpot E2LB-V2/E2LW-V2 Electric Height-Adjustable Desk User Manual</p> <p>User manual for the FlexiSpot E2LB-V2 and E2LW-V2 electric height-adjustable desks, covering assembly, operation, technical specifications, and troubleshooting.</p> |