

[Manuals.plus](#) /

> [MELUCEE](#) /

> MELUCEE Brushed Nickel 3-Light Vanity Light (Model 4501A-3W-SN) Instruction Manual

## MELUCEE 4501A-3W-SN

# MELUCEE Brushed Nickel 3-Light Vanity Light (Model 4501A-3W-SN) Instruction Manual

## 1. INTRODUCTION

This manual provides detailed instructions for the safe installation, operation, and maintenance of your MELUCEE Brushed Nickel 3-Light Vanity Light, Model 4501A-3W-SN. Please read this manual thoroughly before installation and retain it for future reference.



Figure 1: MELUCEE Brushed Nickel 3-Light Vanity Light

The MELUCEE Brushed Nickel 3-Light Vanity Light features a sleek rectangular back plate and square arms with a brushed nickel finish. It includes hammered glass shades and is designed for various interior settings such as bathrooms, kitchens, dressing rooms, and powder rooms. The fixture is compatible with E26 base bulbs (max 60W, not included) and can be used with dimmable bulbs and a compatible dimmer switch (not included).



Figure 2: Product Components - Metal Fixture and Clear Hammered Glass

## 2. SAFETY INFORMATION

**WARNING:** To avoid the risk of electric shock, always disconnect power at the main circuit breaker or fuse box before beginning installation or performing any maintenance.

- Ensure all electrical connections comply with local codes and ordinances, as well as the National Electric Code (NEC).
- Consult a qualified electrician if you are unsure about the installation process.
- Handle glass components with care to prevent breakage.
- Do not exceed the maximum wattage specified for the bulbs (60W per bulb).
- This fixture is designed for indoor use only.
- Wear safety glasses during installation.

## 3. PACKAGE CONTENTS

Verify that all components are present and undamaged before proceeding with installation.

- Light Fixture Body (Brushed Nickel)
- Hammered Glass Shades (3 pieces)
- Mounting Hardware (screws, wire nuts, mounting plate)
- Instruction Manual

**Note:** E26 base bulbs are not included and must be purchased separately.

## 4. SPECIFICATIONS

Feature	Detail
Brand	MELUCEE
Model Number	4501A-3W-SN
Color	Brushed Nickel
Material	Glass, Nickel
Style	Modern
Light Fixture Form	Sconce
Room Type	Bathroom, Kitchen
Indoor/Outdoor Usage	Indoor
Power Source	Corded Electric
Installation Type	Surface Mount
Special Feature	Dimmable (with compatible bulbs and dimmer switch, not included)
Light Source Type	LED (compatible)
Finish Type	Brushed
Number of Light Sources	3
Voltage	120 Volts
Wattage	Max 60 watts per bulb
Bulb Base	E26
Water Resistance Level	Water Resistant
Assembly Required	Yes
Dimensions (Overall)	9.5" (H) x 23.6" (L)
Back Plate Dimensions	4.72" (H) x 23.6" (L)
Glass Shade Dimensions	6" (H) x 4" (Opening)

# Dimension

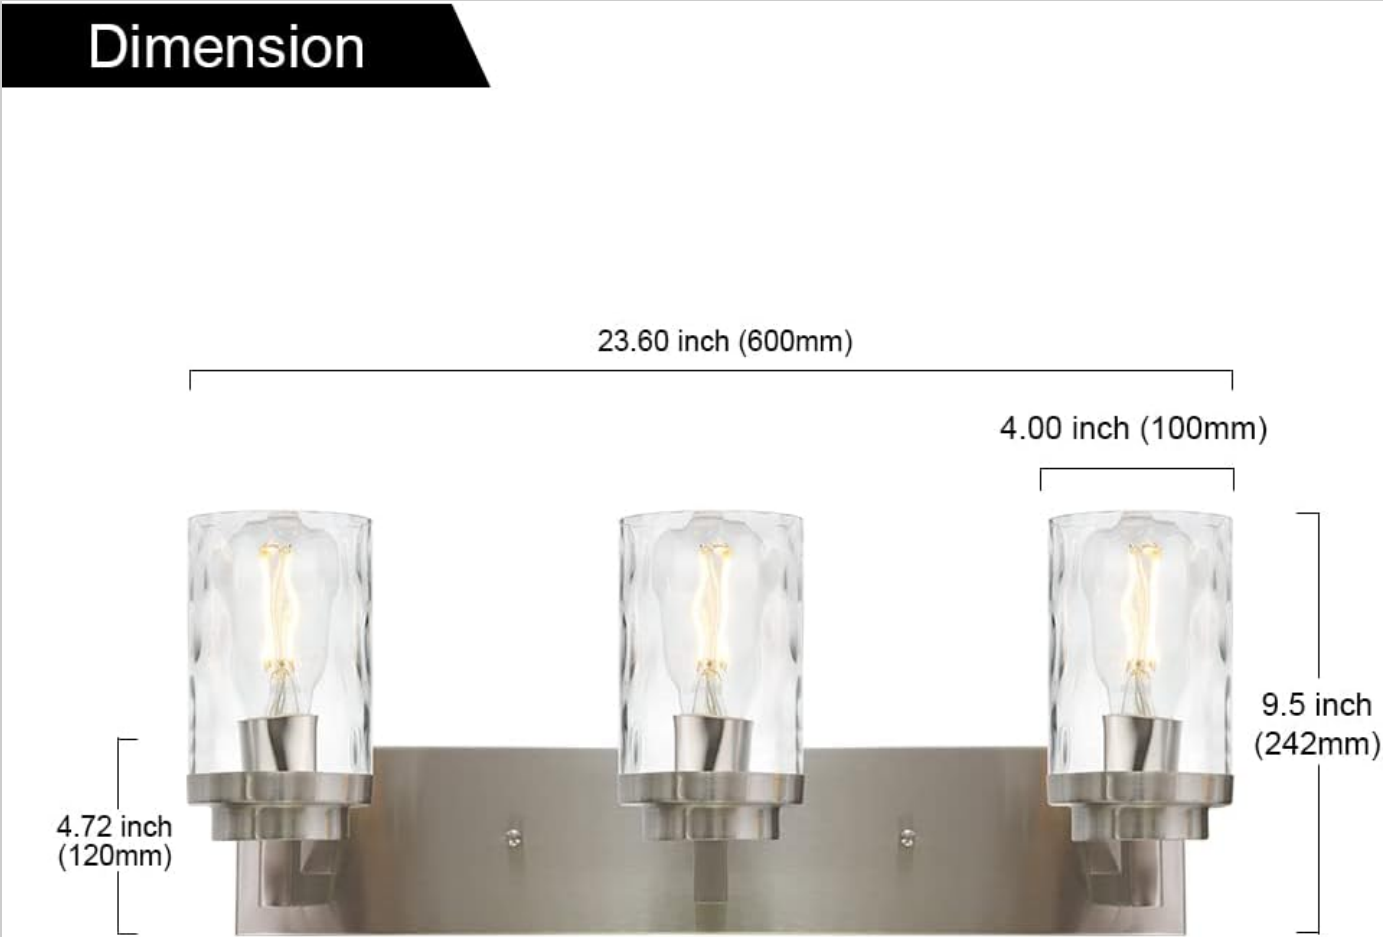


Figure 3: Product Dimensions



## E26 Bulb Base

Max wattage:60W

Voltage :110V-120V

Light bulb is not included

Figure 4: E26 Bulb Base Detail

## 5. INSTALLATION INSTRUCTIONS

Follow these steps carefully for proper installation. If you are not familiar with electrical wiring, consult a qualified electrician.

### 5.1 Tools Required (Not Included)

- Phillips Head Screwdriver
- Flathead Screwdriver
- Wire Strippers
- Pliers
- Electrical Tape
- Safety Glasses

### 5.2 Installation Steps

1. **Turn Off Power:** Locate the circuit breaker controlling the light fixture's power supply and turn it OFF. Ensure power is disconnected before proceeding.
2. **Remove Old Fixture (if applicable):** Carefully remove the existing light fixture from the wall. Disconnect all wiring.
3. **Attach Mounting Plate:** Secure the provided mounting plate to the junction box using the screws. Ensure it is firmly attached.
4. **Wire Connections:**
  - Connect the **black** wire from the fixture to the **black** (live) wire from the junction box using a wire nut.
  - Connect the **white** wire from the fixture to the **white** (neutral) wire from the junction box using a wire nut.
  - Connect the **ground** wire (bare copper or green) from the fixture to the **ground** wire from the junction box and the mounting plate using a wire nut.
  - Wrap electrical tape around each wire nut connection for added security.
5. **Mount Fixture Body:** Carefully align the fixture body with the mounting plate and secure it with the provided screws.
6. **Install Glass Shades:** Attach the hammered glass shades to the fixture. Ensure they are securely fastened.
7. **Install Bulbs:** Screw in three E26 base bulbs (max 60W each, not included) into the sockets.
8. **Restore Power:** Turn the power back ON at the circuit breaker. Test the light fixture.



Figure 5: Installation Orientation (Upward or Downward)

Your browser does not support the video tag.

Video 1: Overview of MELUCEE Bathroom Vanity Light features and installation flexibility. This video demonstrates the product's design and how it can be mounted to direct light upwards or downwards.

## 6. OPERATING INSTRUCTIONS

The MELUCEE Vanity Light operates via a standard wall switch. If a compatible dimmer switch and dimmable bulbs are installed, the light fixture can be dimmed to adjust brightness levels.

- **Turning On/Off:** Use the wall switch connected to the fixture to turn the light on or off.
- **Dimming (Optional):** If a dimmer switch is installed, rotate or slide the dimmer control to adjust the light intensity. Ensure you are using dimmable E26 bulbs for this functionality.



Figure 6: MELUCEE Vanity Light in a Bathroom Setting

Your browser does not support the video tag.

Video 2: Demonstration of MELUCEE Wall Light Fixtures with Clear Hammered Glass. This video highlights the aesthetic and functional aspects of the light when in operation, showcasing the hammered glass effect.

## 7. MAINTENANCE

Regular maintenance ensures the longevity and optimal performance of your light fixture.

- **Cleaning:** Disconnect power before cleaning. Wipe the fixture with a soft, dry cloth. Do not use abrasive cleaners or solvents, as they may damage the finish or glass.
- **Bulb Replacement:** Disconnect power before replacing bulbs. Allow bulbs to cool completely. Unscrew old bulbs and replace with new E26 base bulbs (max 60W).
- **Glass Shade Care:** The hammered glass shades can be carefully removed for cleaning if necessary. Wash with mild soap and water, rinse thoroughly, and dry completely before reattaching.

## 8. TROUBLESHOOTING

Problem	Possible Cause	Solution
Light does not turn on.	<ul style="list-style-type: none"><li>Power is off at the circuit breaker.</li><li>Bulb is loose or burned out.</li><li>Incorrect wiring.</li></ul>	<ul style="list-style-type: none"><li>Check the circuit breaker and ensure it is ON.</li><li>Tighten or replace the bulb(s).</li><li>Verify wiring connections as per Section 5.2. Consult an electrician if needed.</li></ul>
Light flickers.	<ul style="list-style-type: none"><li>Loose bulb.</li><li>Incompatible dimmer switch or bulb.</li><li>Loose wiring connection.</li></ul>	<ul style="list-style-type: none"><li>Tighten the bulb(s).</li><li>Ensure dimmable bulbs are used with a compatible dimmer switch.</li><li>Check wiring connections.</li></ul>
Glass shade is loose.	<ul style="list-style-type: none"><li>Shade not properly secured.</li></ul>	<ul style="list-style-type: none"><li>Carefully re-secure the glass shade to the fixture.</li></ul>

## 9. WARRANTY AND SUPPORT

For warranty information or technical support, please contact MELUCEE customer service through the retailer where the product was purchased or visit the official MELUCEE website. Please have your model number (4501A-3W-SN) and purchase date available when contacting support.

**Manufacturer:** MELUCEE

**Model:** 4501A-3W-SN

